



→ To download and run the Wireless Data Server Password Reset Tool, follow the steps below.

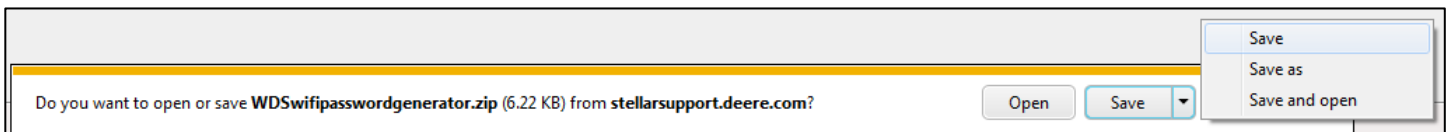


1. Select "Save as."

2. Select the folder where you would like to save the tool. Then press "Save."

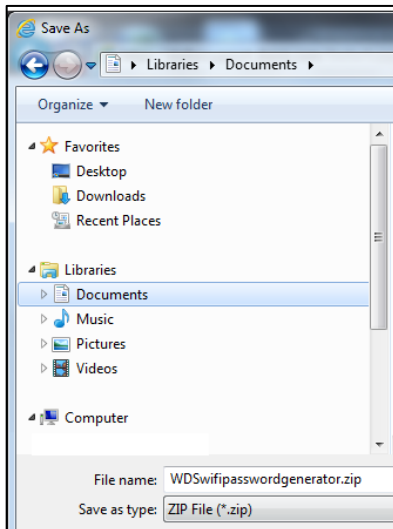


3. Navigate to the folder you saved the tool in.

4. Right click on the file, and select the option to extract the zip file.

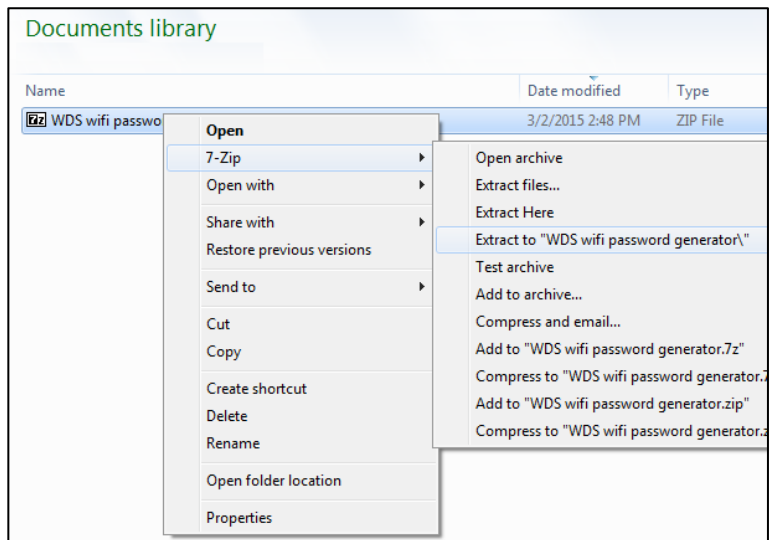


5. Click on "WDS wifi password generator.exe" to run the tool.

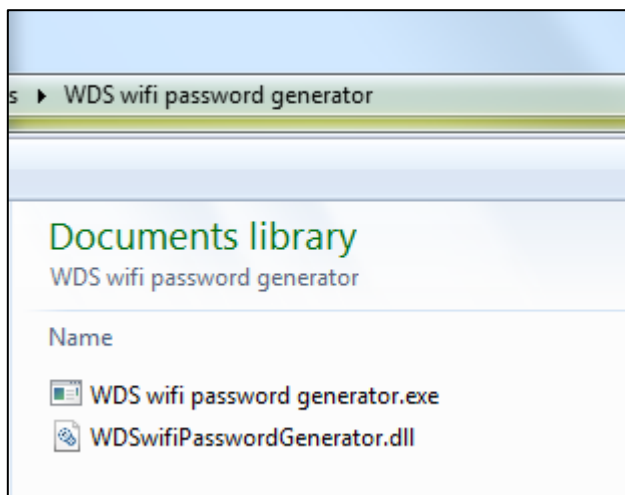

The Wireless Data Server Password Reset Tool can be used to reset the Wireless Data Server password to a random password when a customer forgets their password. This generated password can then be entered into the GreenStar 3 2630 display as a temporary password. The user then has the ability to choose a new password and confirm that password. This tool should not be used for resetting a password if the piece of equipment is being sold. Factory reset option should be used in that situation.


1

The customer will first need to access their password settings on the Wireless Data Server VI. On the main menu, they will first click on the Wireless Data Server Softkey. They will then click on Setup, and finally Password Settings. (*Menu → Wireless Data Server Softkey → Setup → Password Settings*)

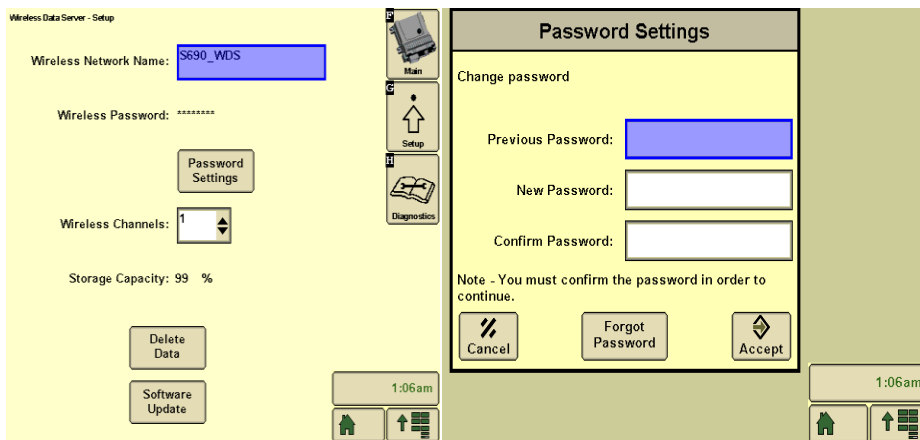

2

The customer will then need to press the button to select "Forgot Password." You will need the WDS Serial Number and Challenge Code from that screen.

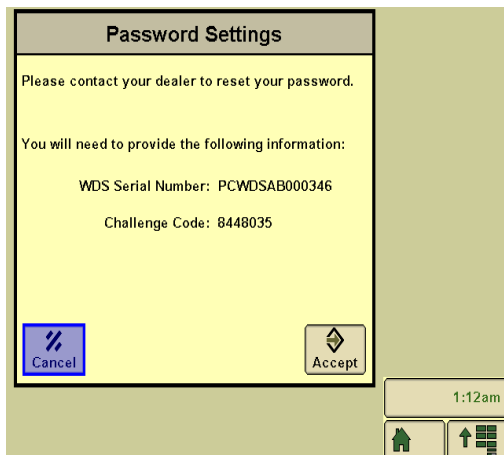

3

Enter the WDS Serial Number and the Challenge Code into the Password Reset Tool. A new password will be generated.

The screenshot shows a window titled "WDS wifi password generator". It contains two input fields: "Enter Serial (e.g. PCWDSAB001234)" and "Enter Challenge code (e.g. 1234567)". Below these is a "Generate master-key" button and an empty output field. At the bottom, there is a note: "Enter this Master Password into the Previous Password listbox on the Command Center display."

4

Again, access the Password settings on the Wireless Data Server VI. The steps are: *Menu* → *Wireless Data Server Softkey* → *Setup* → *Password Settings*.

The screenshot shows the "Password Settings" screen. On the left, the "Wireless Network Name" is "S690_WDS" and the "Wireless Password" is masked with asterisks. A "Password Settings" button is visible. The "Wireless Channels" are set to "1" and "Storage Capacity" is "99 %". On the right, the "Change password" section has three input fields: "Previous Password", "New Password", and "Confirm Password". Below these is a note: "Note - You must confirm the password in order to continue." and three buttons: "Cancel", "Forgot Password", and "Accept". The time "1:06am" is shown at the bottom right.

5

In the field "Previous Password" the password generated by the Password Reset Tool will need to be entered. A new password will then need to be created by the customer in the other fields.

Note

To connect the tablet back to the Wireless Data Server, the user will need to forget that wireless network and reconnect to the wireless network using the newly created password.