

# REPLACEMENT PARTS GUIDE

## 652R EFI MOD Quik-Trak™ Mower with 52 inch Side Discharge Deck

### ENGINE



**OIL FILTER**  
[AM125424](#)

Change every 100 hours or Annually.



### ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)  
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



### AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.



[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.



**JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE**  
[TY24416](#)

### GREASE GUN

[TY26183](#)  
Change As Required.



### FUEL FILTER

[MIU13224](#) (USE WITH [MIA12253](#))  
[UC16183](#) (USE WITH [MIA12650](#) OR  
[MIA13021](#) OR [AUC14248](#))

Change every 300 hours.



### SPARK PLUG

[MIU11020](#)  
Change every 1000 hours.



### FUEL & AIR



### FILLER CAP

[TCU34085](#) (S/N: - 075001)  
[AUC14828](#) (S/N: 075001-)



### MUFFLER

[TCA23468](#)

### ELECTRICAL



### ROTARY SWITCH

[TCA22740](#)



### THROTTLE PUSH PULL CABLE

[TCA23210](#)



### REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)



### IGNITION KEY

[AUC12681](#)



### BATTERY

[TY25221B](#) (12 V)

### TRANSMISSION/ HYDRAULIC



### HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



### TRACTION DRIVE BELT

[UC18232](#) (LGTH = 1301.5 mm,  
WIDTH = 12.45 mm and TK = 8 mm)

# REPLACEMENT PARTS GUIDE

## 652R EFI MOD Quik-Trak™ Mower with 52 inch Side Discharge Deck



### MOWER BLADE

[TCU34280](#) (CUT LENGTH = 165.1 mm)

1



### MULCH BLADE


[UC10725](#) (CUT LENGTH = 177.8 mm)

2



### MOWER DECK LEVELLING

[AM130907](#)

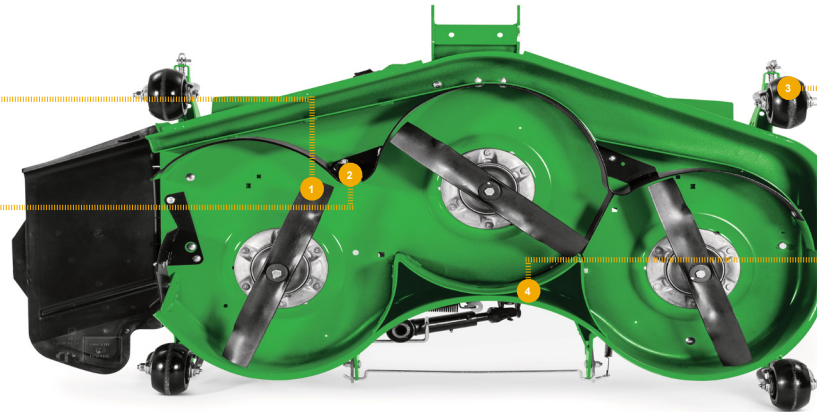

### GAGE WHEELS

[UC28193](#)

3



### FLAT MOWER BELT

[TCU34219](#) (PRIMARY)

(LGTH = 2134.61 mm,  
WIDTH = 16.66 mm, TK = 10.31 mm)



[TCU34215](#) (SECONDARY)

(LGTH = 1169.41 mm,  
WIDTH = 16.66 mm, TK = 10.31 mm)

4

