

WEAR PARTS OVERVIEW

600 Series Cutting Platforms

KNIFE SECTIONS



[H153329](#) (Fine Tooth)

Small Grains or grassy undergrowth conditions.



[H163131](#) (Coarse Tooth)

Coarse Grains/Soybeans.



[H215025](#) Short/Long (Fine Tooth)

Recommended for no-till. Can be used with standard or no-till guards.




[H215064](#) Short / Long (Coarse Tooth)

Recommended for no-till. Can be used with standard or no-till guards.

1

2

3

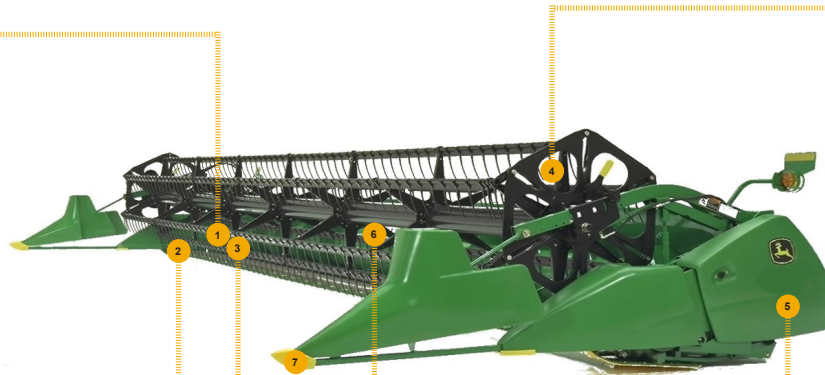

KNIFE SECTIONS



END SECTIONS

[H161242](#) (Fine Tooth)

[H163132](#) (Coarse Tooth)

GUARDS



BLUNT POINT

[H213398](#) (LSL)

[H213507](#) (SLS)

Heat Treated & Carburized for wear resistant outer surface. Recommended for 600F.



HIGH WEAR BLUNT POINT

[H229537](#) (LSL)

[H229538](#) (SLS)

Heat treated and boronized for extra wear life. Recommended for 600F.



STANDARD LONG POINT

[H213405](#) (LSL)

[H213508](#) (SLS)

Heat Treated & Carburized for wear resistant outer surface. Recommended for 600R in Small Grains.



HIGH WEAR BLUNT POINT

[H229539](#) (LSL)

[H229540](#) (SLS)

Heat treated and boronized for extra wear life. Recommended for 600R.

REEL FINGERS



[AH166489](#) Full Bat

[AH166493](#) Full Bat



[AH166490](#) LH Bat



[AH166491](#) RH Bat



[KXE10477](#) No Bat

WIDE REEL FINGER

[H207933](#)



Improved sweeping action in short/light crops Prongs "spear" into crop to minimize shatter.

BELT



CUTTER BAR DRIVE V-BELT

[H220884](#) (Flex)

[H202647](#) (Rigid)

AUGER FINGERS



STEEL

[AH214868](#)



COMPOSITE

[AH214869](#)

ROD



DIVIDER ROD

[AH147232](#)

Knock down less crop in small grains & standing drilled beans.



WEAR PARTS OVERVIEW

600 Series Cutting Platforms

600F POLY SKID PLATES



[H215075](#) (1 LH)



[H208626](#) (1 LH)



[H205344](#) (66 (35'))
[H205344](#) (56 (30'))
[H205344](#) (46 (25'))
[H205344](#) (40 (22'))
[H205344](#) (36 (20'))
[H205344](#) (32 (18'))
[H205344](#) (26 (15'))



[H209696](#) (1 RH)



[H170501](#) (1 RH)



[H150218](#) (Rivet)

