

REPLACEMENT PARTS GUIDE

Z925M EFI Flex Fuel ZTrak™ M Series Mower

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 Hrs.



ENGINE OIL

[TY22029](#) (Turf-Gard™ - 10W-30) (With Filter)
(1.6 L - 1.8 L) (1.7 qt - 1.9 qt)

Change every 100 Hrs.



AIR FILTER

[M131802](#) (PRIMARY)

Change every 300 Hrs.

[M131803](#) (SECONDARY)

Change every 500 Hrs.



MULTI - PURPOSE SD POLYUREA GREASE

[TY6341](#)

GREASE GUN

[TY26518](#)

Change As Required.



FUEL FILTER

[UC16183](#) (USE WITH [AUC14248](#))

[MIU13224](#) (USE WITH [MIA12351](#) OR [MIA12652](#))

Change every 300 Hrs.



SPARK PLUG

[MIU11020](#)

Change every 1000 Hrs.



ELECTRICAL



IGNITION SWITCH

[TCA22740](#) (S/N (- 070000))

[AUC18708](#) (S/N (070001-))



HEADLIGHT BULB

[AM118013](#) (37.5 W)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V) (FOR CANADA AND USA)

[MCYP340PF](#) (12 V) (NOT FOR CANADA AND USA)

FUEL & AIR



FILLER CAP

[TCA23672](#) (S/N (- 070000))

[AUC11638](#) (S/N (070001-))



MUFFLER

[TCA21571](#)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[MIA881446](#)

Change every 500 Hrs After 300 hour Initial Break In






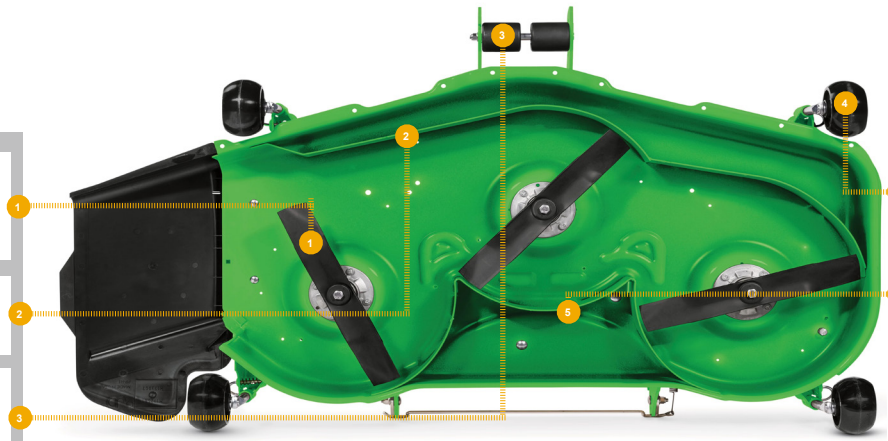
TRACTION DRIVE BELT



[TCU34299](#) (LGTH = 1803.9 mm,
WIDTH = 16 mm)

REPLACEMENT PARTS GUIDE

Z925M EFI with 54 inch Deck






	MOWER BLADE TCU30317 (HIGH LIFT) TCU30316 (STANDARD LIFT)
	MULCH BLADE M135334
	ROLLER TCU34060

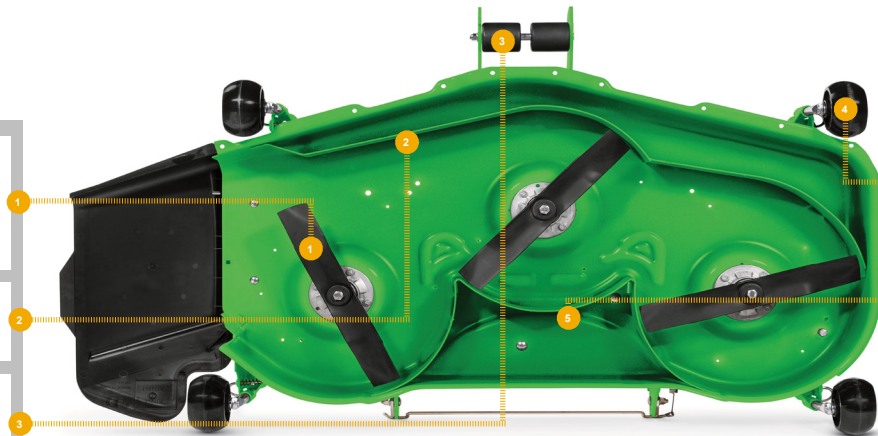




	GAGE WHEELS UC28193
	V - BELT TCU31132 (LGTH = 4337 mm, WIDTH = 14 mm)

REPLACEMENT PARTS GUIDE

Z925M EFI with 60 inch Deck

	MOWER BLADE TCU15881 (HIGH LIFT)
	M128485 (STANDARD LIFT)
	M133381 (LOW LIFT)
	MULCH BLADE M168223
	ROLLER TCU34060



	GAGE WHEELS UC28193
	V - BELT TCU35604 (LGTH = 4635 mm, TK = 18 mm, WIDTH = 14 mm)