


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

5N Series - 5325N, 5425N, 5525N Tractors

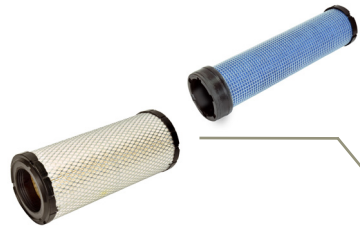


ENGINE

PRIMARY AIR FILTER
[KV16429](#) (all)

SECONDARY AIR FILTER
[AT171854](#) (all)

Service after 300 hours if operating under extremely dusty conditions. Replace filters annually once. Change as required.



CAB

AIR FILTER
[AL225552](#) (all)

Clean after 300 hours if operating under extremely dusty condition. Change as required.



ENGINE

FINAL FUEL FILTER
[RE522868](#) (5425N, 5525N)
[RE508202](#) (5325N)

Replace after every 500 hours.



ENGINE

OIL FILTER
[RE504836](#) (5425N, 5525N)
[RE519626](#) (5325N)

For 5425N and 5525N models replace after first 100 hours and for 5325N model replace after first 300 hours. Then replace after 500 hours if John Deere PLUS-50™ Engine Oil is used, or else replace after 300 hours. Change the filters annually once.



HYDRAULIC OIL FILTER
[RE197065](#) (all)

Replace after first 100 hours and then replace after every 600 hours.



http://www.deere.com/en_US/parts/service/support/filter/overviews

CAPACITIES

5N Series - 5325N, 5425N, 5525N Tractors

CAPACITIES (Approximate):

Fuel Tank:

.....72 L (19 gal)

Cooling System:

Cool-Gard™ II

5325N9.5 L (2.5 gal)

5425N and 5525N 11.4 L (3 gal)

Crankcase with Filter:

Plus-50 II™

5325N10 L (2.19 gal)

5425N and 5525N8.5 L (1.86 gal)

Transmission and Hydraulic System:

Hy-Gard™

12 x 12 PowrReverser™ 43.5 L (11.5 gal)

24/24 PowrReverser™45.4 L (12 gal)

Mechanical Front Wheel Drive (MFWD) Axle:

Hy-Gard™

Axle Housing5 L (1.09 gal)

Wheel Hub (Each)0.5 L (0.1 gal)

[Return to Filter Overview](#)

