


# PowerTech™

## 4045DF150 Diesel Engine

Industrial Engine Specifications




4045DF150 shown

### Certifications

CARB  
EPA Tier 1  
EU Stage I

### Engine dimensions

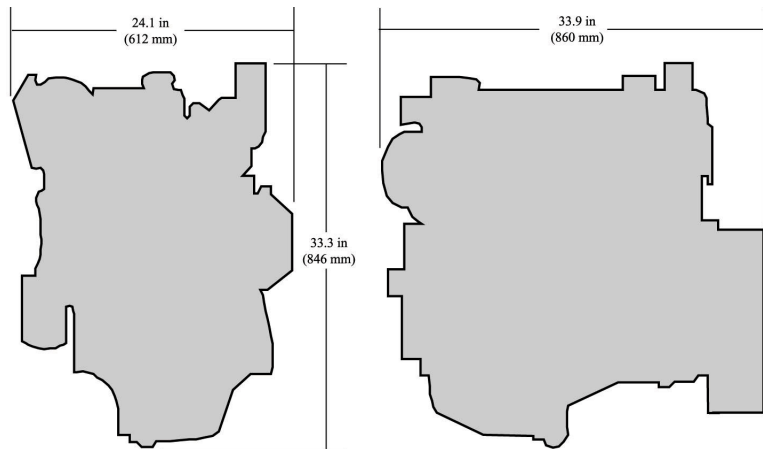

Dimensions may vary according to options selected. Call your distributor for more information.

### General data

Model	4045DF150	Length - mm (in)	860 (33.9)
Number of cylinders	4	Width - mm (in)	612 (24.1)
Displacement - L (cu in)	4.5 (275)	Height-- mm (in)	846 (33.3)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)	Weight, dry-- kg (lb)	387 (853)
Compression Ratio	17.6:1		
Engine Type	In-line, 4-Cycle		
Aspiration	Naturally aspirated		

### Performance data range

Application ratings	Intermittent
Rated power/Rated speed	36-63 kW (48-84 hp) @2250-2500rpm
Peak power	37-63 kW (50-84 hp) @2000-2500rpm
Power bulge	NA @ NA rpm
Peak torque	290-302 N.m (214-223ft-lb) @1000-1200rpm
Torque rise	NA

The Industrial Intermittent engine power rating is for applications that operate at varying loads and speeds, and do not fit the Industrial Heavy-Duty rating information.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

## Features and benefits

### Dynamically Balanced Crankshaft

- Crankshafts are formed from nodular iron

### Forged-Steel Connecting Rods

- Unique 45-degree design permits use of larger crankshaft connecting-rod bearings for increased durability

### Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

### Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

### Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

### Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

### Optional Engine-Balancer Shafts

- Provides smooth engine operation