


PowerTech™


4045DF270 Diesel Engine

Industrial Engine Specifications



4045DF270 shown

Engine dimensions

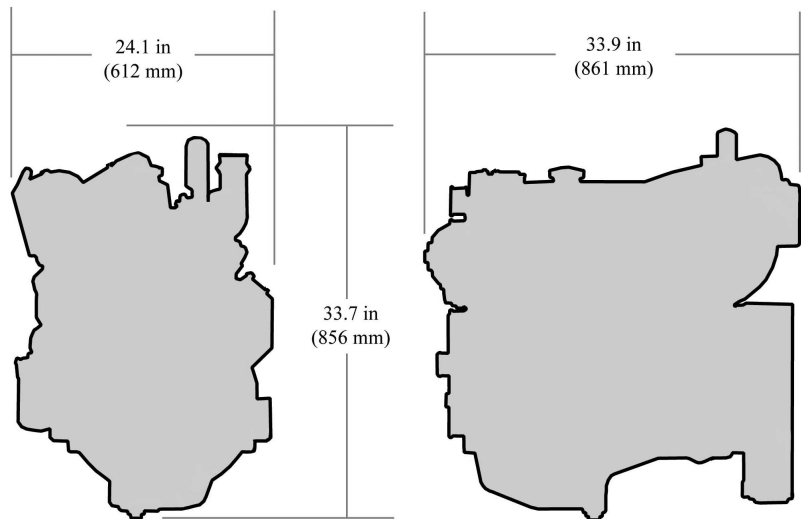

Dimensions may vary according to options selected. Call your distributor for more information.

Certifications

CARB
EPA Tier 2
EU Stage II

General data

Model	4045DF270	Length - mm (in)	861 (33.9)
Number of cylinders	4	Width - mm (in)	612 (24.1)
Displacement - L (cu in)	4.5 (275)	Height-- mm (in)	856 (33.7)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)	Weight, dry-- kg (lb)	387 (853)
Compression Ratio	17.6:1		
Engine Type	In-line, 4-Cycle		
Aspiration	Naturally aspirated		

Performance data range

Application ratings	Intermittent
Rated power/Rated speed	55-60 kW (74-80 hp) @2500rpm
Peak power	55-60 kW (74-80 hp) @2500rpm
Power bulge	NA @ NA rpm
Peak torque	283-296 N.m (209-218ft-lb) @1200-1400rpm
Torque rise	NA

The Industrial Intermittent engine power rating is for applications that operate at varying loads and speeds, and do not fit the Industrial Heavy-Duty rating information.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

Features and benefits

Dynamically Balanced Crankshaft

- Crankshafts are formed from nodular iron

Forged-Steel Connecting Rods

- Unique 45-degree design permits use of larger crankshaft connecting-rod bearings for increased durability

Self-adjusting Poly-vee Fan Drive

- Self-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity

Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

500-Hour Oil Change

- Customers save significant costs on oil, filters and labor with a 500-hour oil change interval

Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

Optional Engine-Balancer Shafts

- Provides smooth engine operation