


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 4940 Self-Propelled Sprayer

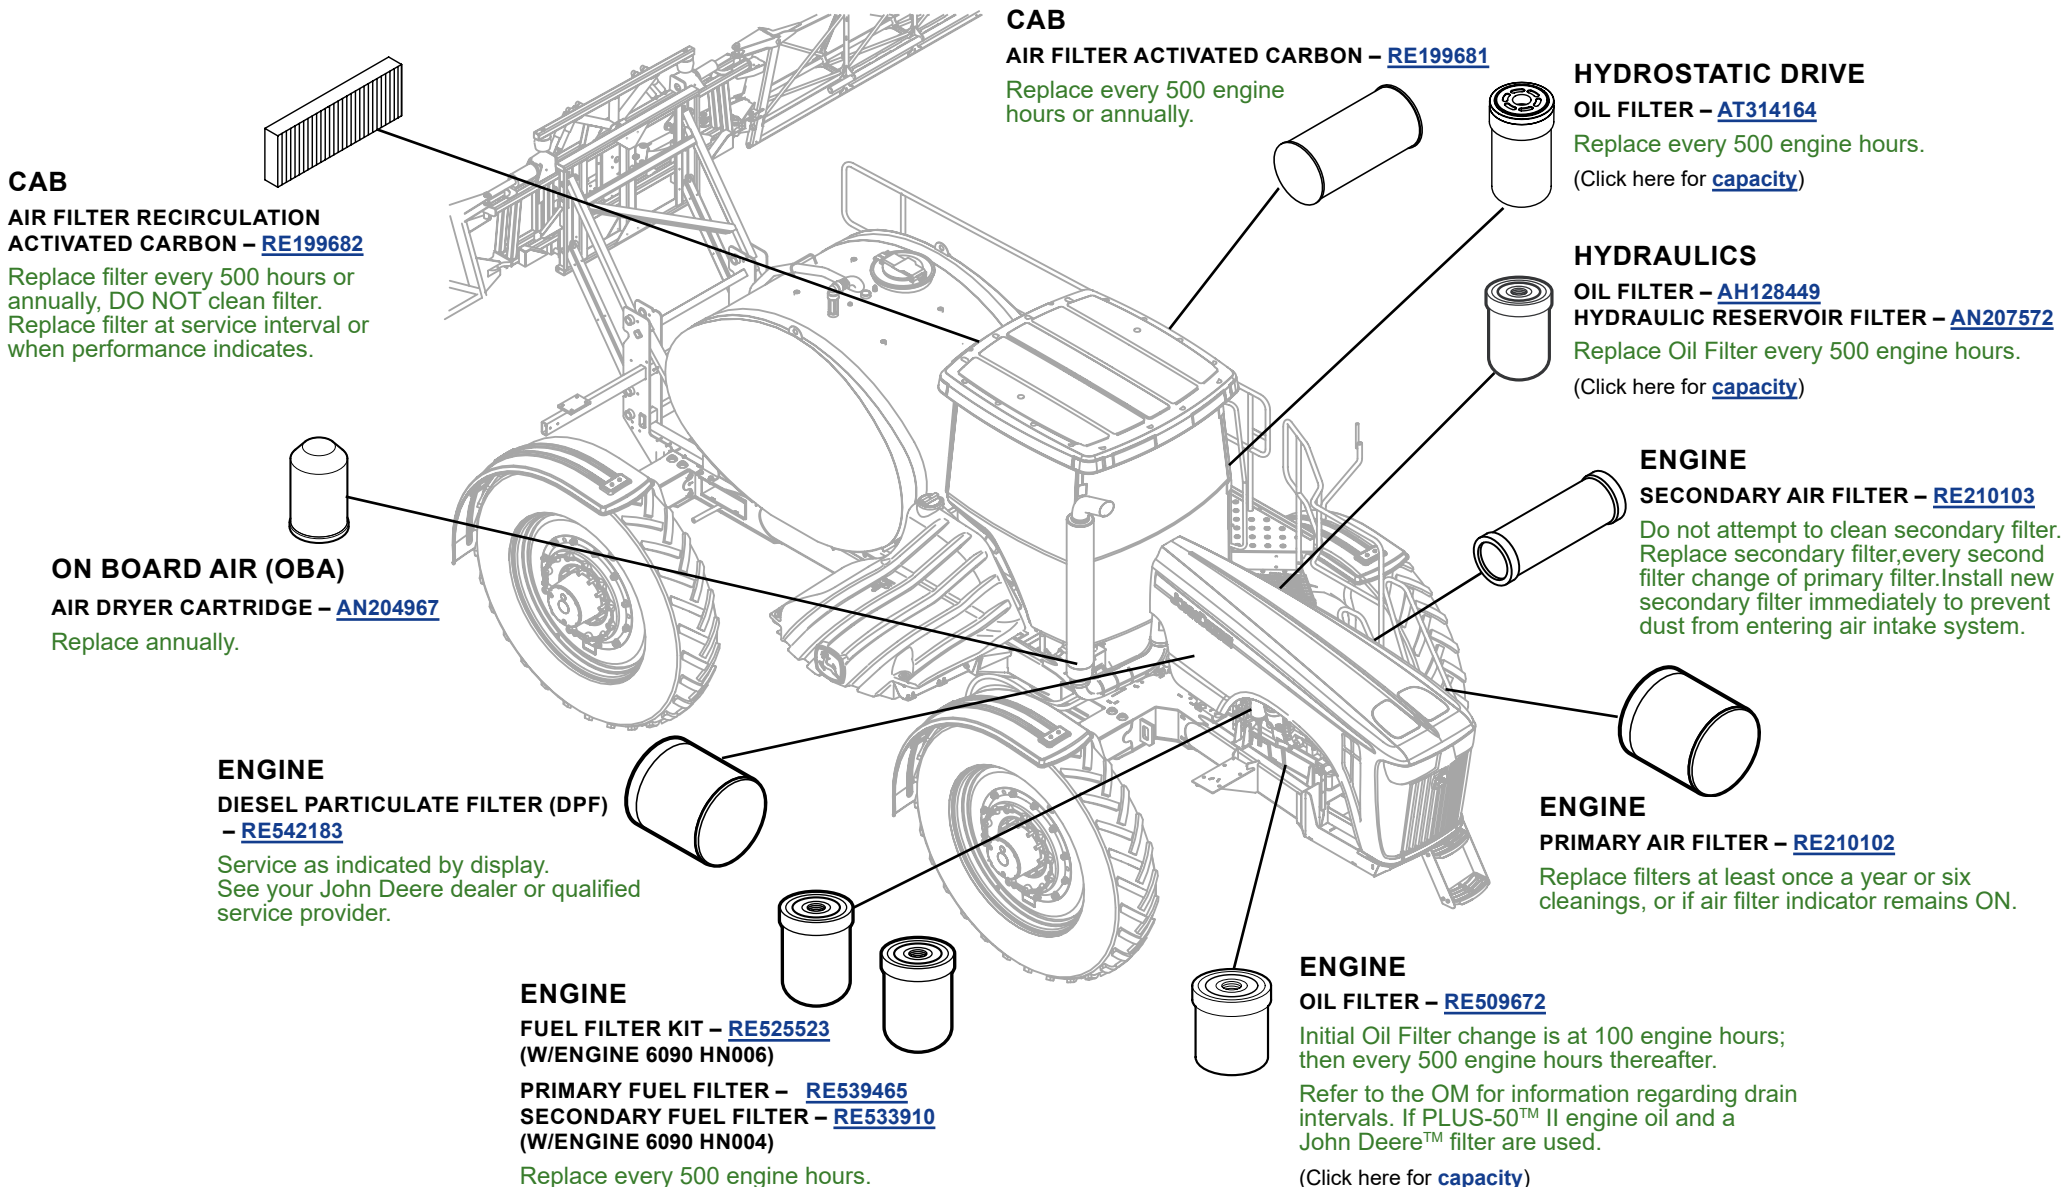

# CAPACITIES

## 4940 Self-Propelled Sprayer

### CAPACITIES (Approximate):

#### Fuel Tank:

Use ULSD Fuel Only

..... 568 L (150 gal)

#### Cooling System with Heater:

Cool-Gard™ II

..... 41 L (10.8 gal)

#### Crankcase including Filter:

Plus-50™ II

..... 31 L (8.2 gal)

#### Hydraulic Reservoir:

Turf-Gard™ or TORQ-GARD SUPREME™ 10W-30

..... 83 L (22 gal)

#### Hydraulic System:

Turf-Gard™ or TORQ-GARD SUPREME™ 10W-30

Hydraulic and Hydrostatic..... 163 L (43 gal)

#### Final Drives (Front Hubs) Each:

GL-5

..... 3.8 L (1 gal)

#### Final Drives (Rear Hubs) Each:

GL-5

..... 3.8 L (1 gal)

[Return to Filter Overview](#)

\*For complete recommended fluid specifications please refer to the current Operations Manual.

