

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 4M Final Tier 4 (FT4) Series Compact Utility Tractors - 4044M, 4052M, 4066M

### ENGINE

#### DIESEL PARTICULATE FILTER (DPF)

(4044M) – [MIU803276](#)

(4052M, 4066M) – [MIU802216](#)

See your John Deere™ dealer or qualified service provider.

### FILTER PAK – [LVA21039](#)

Each kit contains M806419, LVA10419, MIU803127, RE45864, RE68048 and MIU802421, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

### ENGINE

#### OIL FILTER – [M806419](#)

Replace after every 200 hours or annually, whichever occurs first.

(Click here for [capacity](#))

### ENGINE

#### PRIMARY AIR FILTER – [RE68048](#)

#### SECONDARY AIR FILTER – [RE68049](#)

Check after every 600 hours and replace as required.

### ENGINE

#### PRIMARY FUEL FILTER – [MIU802421](#)

#### FINAL FUEL FILTER – [MIU803127](#)

Replace after every 400 hours or annually, whichever occurs first.

### HYDRAULIC

#### OIL FILTER – [LVA10419](#)

Replace after every 400 hours.


(Click here for [capacity](#))

### TRANSMISSION

#### OIL FILTER – [RE45864](#)

Replace after every 400 hours change every 1200 hours or 3 years.

(Click here for [capacity](#))

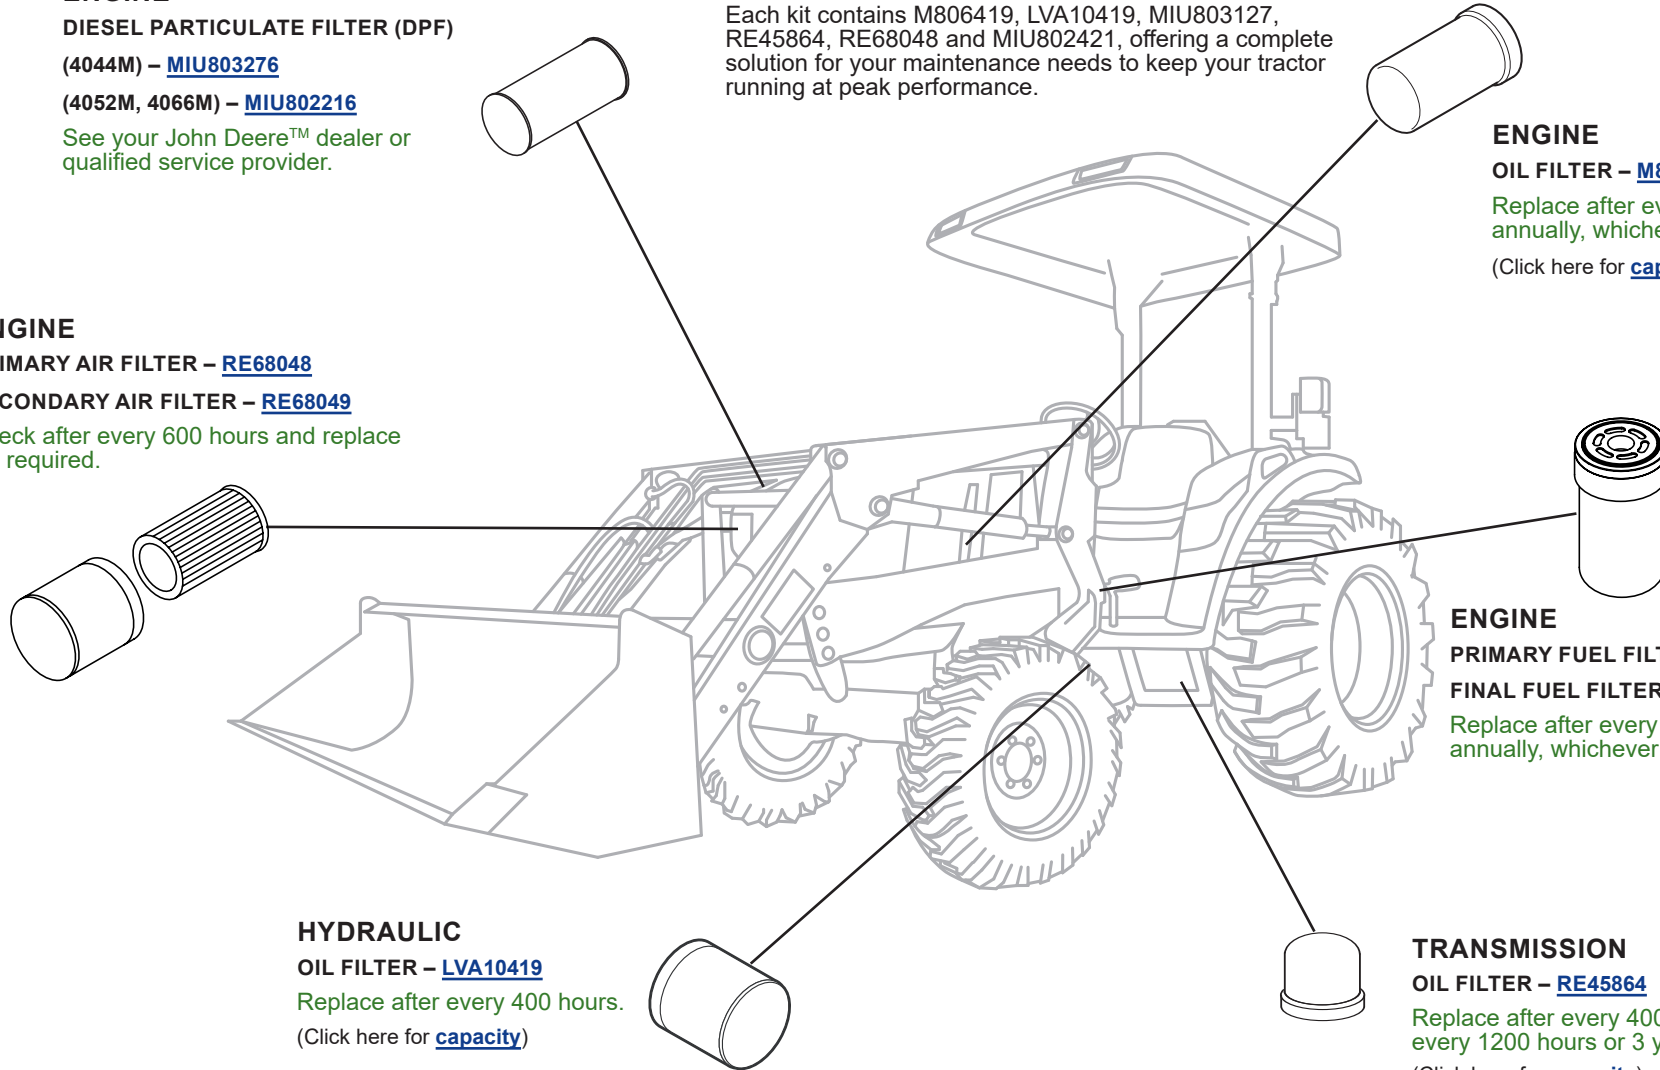

# CAPACITIES

## 4M Final Tier 4 (FT4) Series Compact Utility Tractors - 4044M, 4052M, 4066M

### CAPACITIES (Approximate):

#### **Fuel Tank:**

..... 49.2 L (13 gal)

#### **Cooling System:**

##### **Cool-Gard™ II**

..... 6 L (1.5 gal)

#### **Crankcase with Filter:**

##### **Plus-50™ II**

..... 5.4 L (1.4 gal)

#### **Transmission and Hydraulic System:**

##### **Hy-Gard™**

..... 44 L (12 gal)

#### **Front Axle:**

##### **Hy-Gard™**

..... 5 L (1.3 gal)

[Return to Filter Overview](#)

