


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 5M Series Tractors iT4 (5085M, 5100M, 5100MH, 5115M, 5115ML)

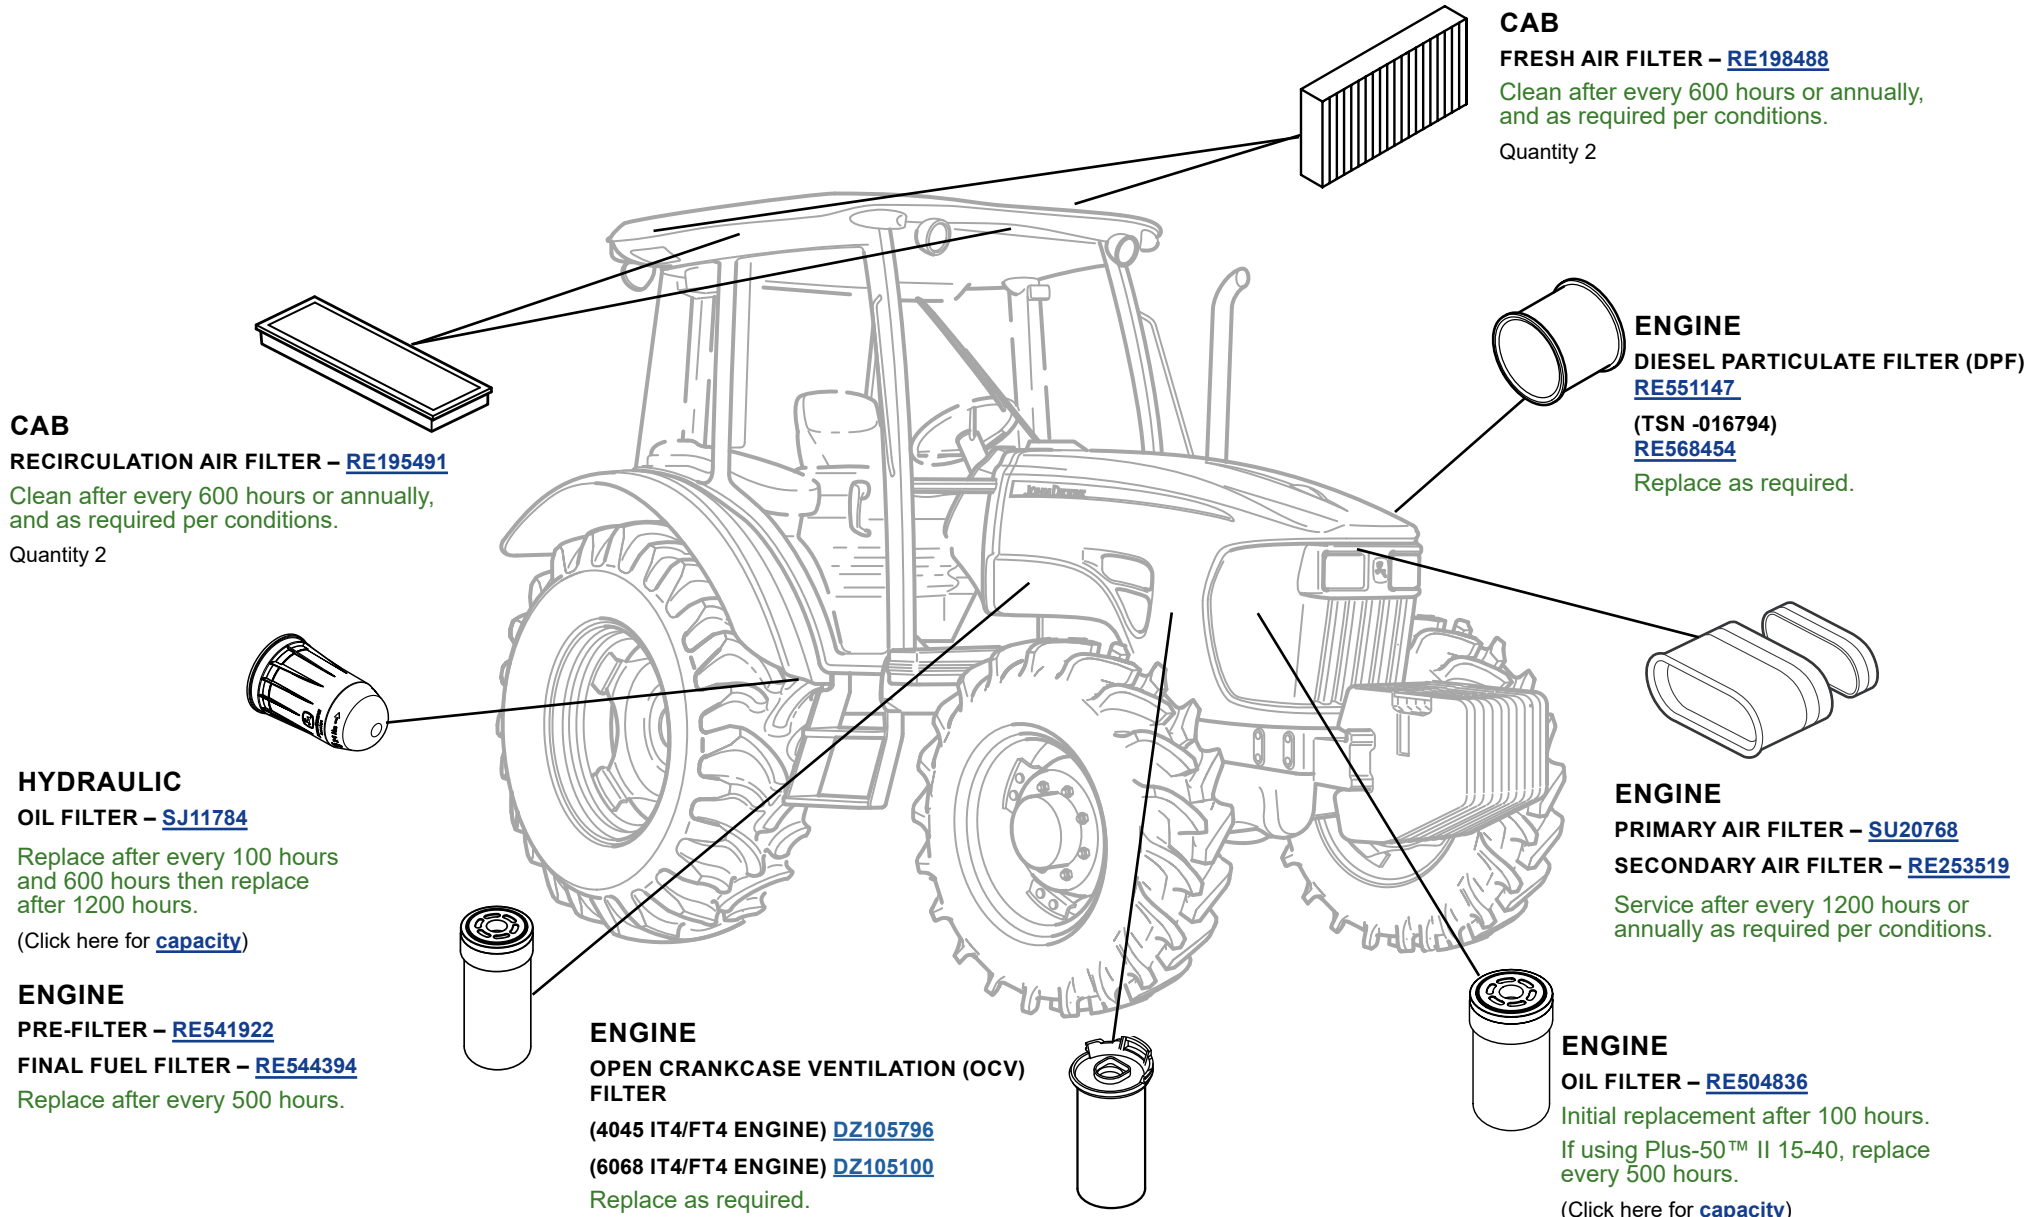

# CAPACITIES

## 5M Series Tractors iT4 (5085M, 5100M, 5100MH, 5115M, 5115ML)

### CAPACITIES (Approximate):

#### Fuel Tank:

5085M, 5100M, 5100ML, 5115M, 5115ML Open Operator Station Tractors .....	153 L (37 gal)
5100MH .....	139 L (37 gal)
5085M, 5100M, and 5115M Cab Tractors .....	177 L (47 gal)

#### Cooling System:

##### Cool-Gard™ II

5085M, 5100M, 5100ML 5100MH, 5115M and 5115ML Tractors .....	19 L (5 gal)
--	--------------

#### Crankcase with Filter:

##### Plus-50™ II

.....	13 L (3.4 gal)
-------	----------------

#### Transmission and Hydraulic System:

##### Hy-Gard™

SyncShuttle™ Plus Transmission .....	53 L (14 gal)
Power Reverser™ or SyncReverser™ Transmission .....	53 L (14 gal)
Power Reverser™ Plus Transmission .....	53 L (14 gal)

#### Mechanical Front Wheel Drive (MFWD) Axle:

##### Hy-Gard™

Differential Housing .....	5 L (1.32 gal)
Wheel Hub (Each) .....	0.8 L (0.21 gal)

#### Front PTO:

##### Hy-Gard™

.....	0.8 L (0.21 gal)
-------	------------------

[Return to Filter Overview](#)

