


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 6050 Series Self-Propelled Forage Harvesters 6650, 6750, 6850, 6950


### CAB RECIRCULATION AIR FILTER [Z62223](#)

Clean after every 250 hours and replace as required.



### CAB FRESH AIR FILTER [AZ43412](#)


Clean after every 250 hours and replace as required.



### ENGINE

SECONDARY AIR FILTER (6650) – [AT166136](#)  
SECONDARY AIR FILTER (6750-6950) – [AZ45867](#)

Replace after every 1500 hours and as required.



### ENGINE

PRIMARY AIR FILTER  
(6650) – [AZ39761](#)  
(6750-6950) – [AZ45868](#)

Replace after every 1500 hours and as required.

### ENGINE

COOLANT FILTER  
(6950) – [PMWF2075](#)

Replace after every 250 hours.  
(Click here for [capacity](#))




### ENGINE

OIL FILTER  
(6650) – [DZ101880](#)  
(6750-6850) – [RE58935](#)  
(6950) – [PMLF9009](#)

Replace after first 100 hours and 250 hours, thereafter.

(Click here for [capacity](#))



### ENGINE

FUEL FILTER  
PRIMARY (6650) – [AR86745](#)  
SECONDARY (6650) – [AR86755](#)  
PRIMARY (6750-6850) (ESN 007566- ) – [RE500186](#)  
SECONDARY (6750-6850) (ESN 007566- ) – [RE501113](#)  
PRIMARY (6750-6850) (ESN 007567-010659) – [RE502203](#)  
SECONDARY (6750-6850) (ESN 007567-010659) – [RE502204](#)  
(6750-6850) (ESN 010660- ) – [RE507284](#)  
(6950) – [PMFS1000](#)

Replace after every 250 hours.




### HYDRAULICS

HYDROSTATIC CHARGE FILTER  
ALL – [AH128449](#)

Replace after the first 100 hours, then every 500 hours thereafter.

(Click here for [capacity](#))




### HYDRAULICS

HYDRAULIC OIL FILTER  
ALL – [AT120444](#)

Replace after the first 100 hours, then every 500 hours thereafter.

(Click here for [capacity](#))

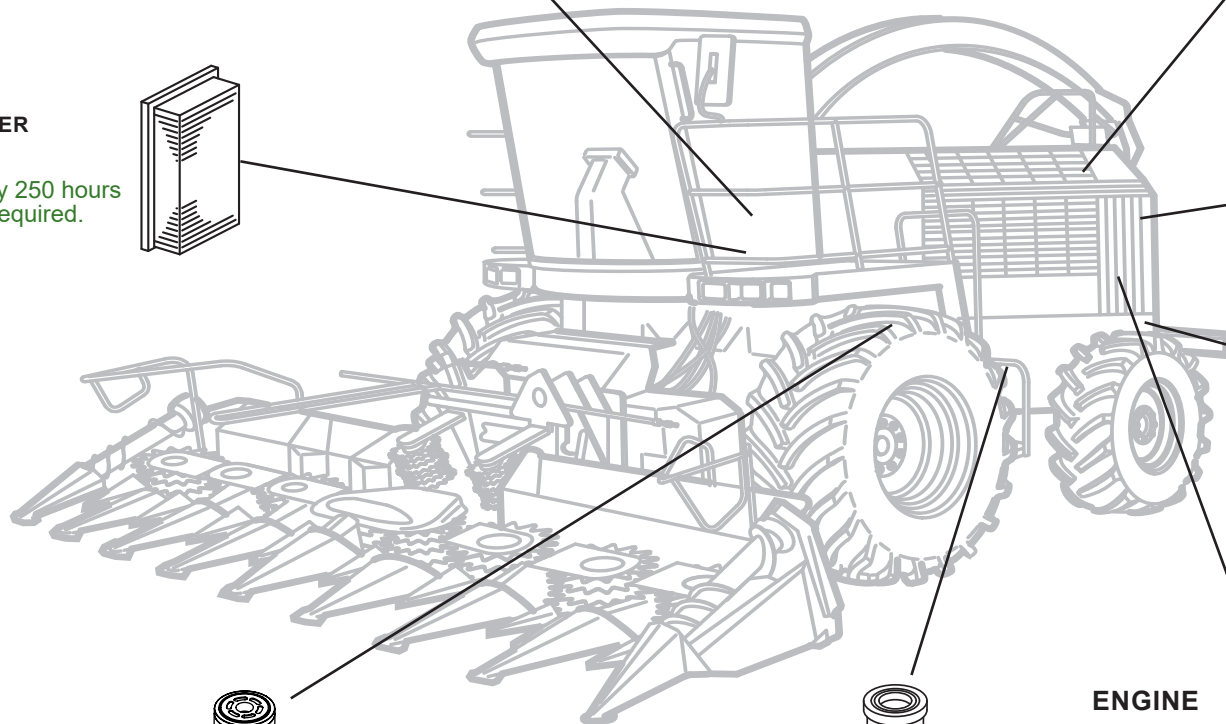

**JOHN DEERE**

Genuine Parts and Service

# CAPACITIES

## 6050 Series Self-Propelled Forage Harvesters 6650, 6750, 6850, 6950

### CAPACITIES (Approximate):

#### **Fuel Tank:**

Standard.....	700 L (185 gal)
Extra Fuel Tank.....	300 L (79.3 gal)

#### **Cooling System (Complete):**

##### **Cool-Gard™**

6650.....	47 L (12.4 gal)
6750-6850 .....	60 L (15.9 gal)
6950.....	80 L (21.1 gal)

#### **Engine with Filter:**

##### **Plus-50™**

6650.....	28.5 L (7.5 gal)
6750-6850 .....	42 L (11.1 gal)
6950.....	41.7 L (11 gal)

#### **Transmission:**

##### **GL-5**

.....	7 L (1.85 gal)
-------	----------------

#### **Final Drives (Each):**

##### **GL-5**

.....	5.1 L (1.34 gal)
-------	------------------

#### **Hydraulic System:**

##### **Hy-Gard™**

Hydraulic System.....	66.5 L (17.6 gal)
Hydraulic System (With Rear Wheel Drive).....	39 L (10.3 gal)
Hydraulic System (Without Rear Wheel Drive).....	31 L (8.2 gal)
Reservoir .....	21 L (5.7 gal)

#### **Lift And Steering Hydraulics:**

Without Rear Hydraulics.....	46.1L (12.2 gal)
With Rear Hydraulics.....	66.5 L (17.6 gal)

#### **In Length Of Cut Transmission:**

.....	17 L (4.5 gal)
-------	----------------

#### **Brake System:**

Complete System .....	1 L (0.26 gal)
Reservoir .....	0.5 L (0.13 gal)

[Return to Filter Overview](#)

[Return to Filter Overview](#)

