

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

W170 Windrower

CAB
FRESH AIR INTAKE FILTER [AFH208659](#)
 Clean after every 50 hours and change as required.

ENGINE
DIESEL EXHAUST FLUID (DEF) DOSING UNIT FILTER
[DZ114640](#) USE FOR [DZ111283](#) (DOSING UNIT PUMP)
[RE554498](#) USE FOR [RE552175](#) (DOSING UNIT PUMP)
 Replace after every 4500 hours or every three years of operation, whichever comes first.
 (Click here for [capacity](#))

CAB
RETURN AIR FILTER [AFH208656](#)
 Clean every 100 hours and replace as required.

HYDRAULIC
HYDRAULIC FILTER
[AFH217822](#) RETURN FILTER
[T175002](#) CHARGE FILTER
 Replace after 500 hours or each season, whichever comes first.
 (Click here for [capacity](#))

ENGINE
DIESEL PARTICULATE FILTER
[DZ104594](#)
 Replace as required.
 Note: When the exhaust filter and warning light indicators are alerted on the display, replace the DPF within 250 hours.

ENGINE
SECONDARY AIR FILTER [PMAF25963](#)
 Replace each season and as required.


ENGINE
PRIMARY AIR FILTER [PMAF25962](#)
 Replace after every 250 hours or each season, whichever comes first.

ENGINE
OPEN CRANKCASE VENTILATION (OCV) FILTER
[DZ105100](#)
 Replace every 1500 hours.

ENGINE
PRIMARY FUEL FILTER [RE551507](#)
SECONDARY FUEL FILTER [RE551508](#)
 Replace after every 500 hours or each season, whichever comes first.

ENGINE
OIL FILTER [RE504836](#)
 Replace after every 250 hours or each season, whichever comes first.
 (Click here for [capacity](#))

ENGINE
FUEL STRAINER [FH318254](#)
 Replace each season.
 (Click here for [capacity](#))

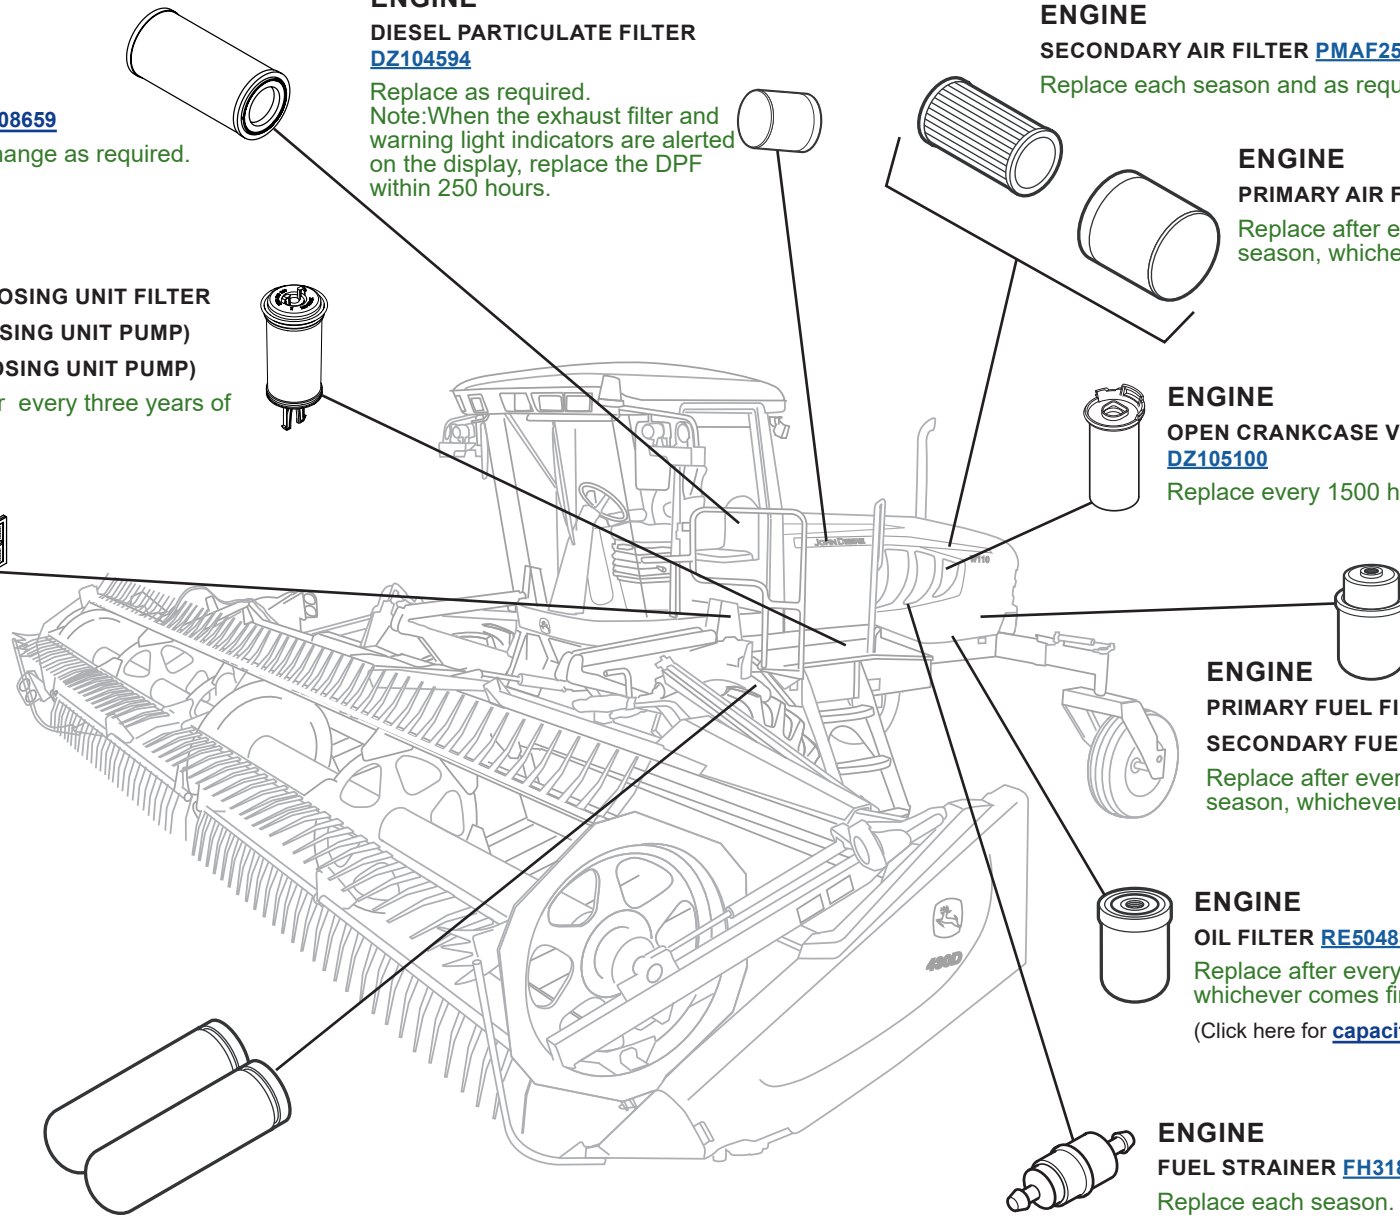

CAPACITIES

W170 Windrower

CAPACITIES (Approximate):

Fuel Tank:

..... 530 L (140 gal))

Cooling System:

Cool-Gard™ II

..... 30 L (7.9 gal)

Engine Oil with Filter:

Plus-50™ II

..... 11.9 L (3.1 gal)

Hydraulic System (Reservoir):

Hy-Gard™

..... 58 L (15.3 gal)

Diesel Exhaust Fluid (DEF) Tank:

John Deere™ Diesel Exhaust Fluid

..... 28 L (7.5 gal)

Final Drives Each:

GL-5 85W-140, Before Initial Change

GL-5 Fully Synthetic Gear Lubricant 75W-90, After Initial Change

..... 1.4 L (0.36 gal)

Pump Drive Gear Case:

GL-5 Fully Synthetic Gear Lubricant 75W-90

..... 2.1 L (0.55 gal)

Air-conditioning System:

Air Conditioning Refrigerant 2270 g (5 lb)

Air Conditioning Compressor Oil 240 ml (8.1 fl. oz.)

[Return to Filter Overview](#)

