

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## W260 Windrower

### CAB

**FRESH AIR FILTER – [RE284091](#)**

Clean after every 50 hours and replace as required.

### CAB

**RECIRCULATION AIR FILTER – [L214634](#)**

Clean after first 100 hours and every 250 hours thereafter or each season whichever occurs first and replace as required.

### ENGINE

**DIESEL PARTICULATE FILTER  
[RE561836](#) - 6068HE002**

[DZ100484](#) - 6068HE054 and 6068HE056

Replace after every 5500 hours and as required.

Note:-When exhaust filter and warning light indicators are alerted on display replace within 250 hours.

### ENGINE

**FUEL TANK VENT FILTER [H216169](#)**

Clean after every 500 hours or each season whichever occurs first.

### ENGINE

**DIESEL EXHAUST FLUID (DEF) DOSING UNIT FILTER  
[RE554498](#) USE FOR [RE552175](#) (DOSING UNIT PUMP).**

[DZ114640](#) USE FOR [DZ111283](#) (DOSING UNIT PUMP).

Replace after every 4500 hours or 3 years whichever occurs first.

### ENGINE

**CRANKCASE BREATHER FILTER – [RE553703](#)**

Replace after every 1500 hours.

### ENGINE

**FUEL FILTER KIT (Includes Primary and Secondary)**

[RE556406](#) (Engine Option Code 35D5)

**PRIMARY FUEL FILTER**

[RE551507](#) (Engine Option Code 35JL, 35K3)

**SECONDARY FUEL FILTER**

[RE560681](#) (Engine Option Code 35JL, 35K3)

Replace after every 500 hours or each season, whichever occurs first.

### ENGINE

**PRIMARY AIR FILTER – [AN403918](#)**

Replace as required or each season, whichever occurs first.

**SECONDARY AIR FILTER – [AN403919](#)**

Replace as required or each season, whichever occurs first.

### ENGINE

**OIL FILTER – [RE539279](#)**

Replace after first 100 hours, then every 250 hours or each season, whichever occurs first. If Plus-50™ oil is used along with John Deere™ oil filter, the oil interval may be extended by 250 hours.

(Click here for [capacity](#))

### ENGINE

**DIESEL EXHAUST FLUID (DEF) TANK VENT FILTER  
[H216169](#)**

Clean after every 500 hours or 1 year whichever occurs first.

### HYDRAULIC

**HYDROSTAT FILTER**

[AH128449](#) (-420000)

[T175002](#) (420001-)

Replace after every 400 hours or each season, whichever occurs first.


(Click here for [capacity](#))

### HYDRAULIC

**RESERVOIR VENT FILTER – [AT101565](#)**

Replace after every 400 hours or each season, whichever occurs first.

(Click here for [capacity](#))

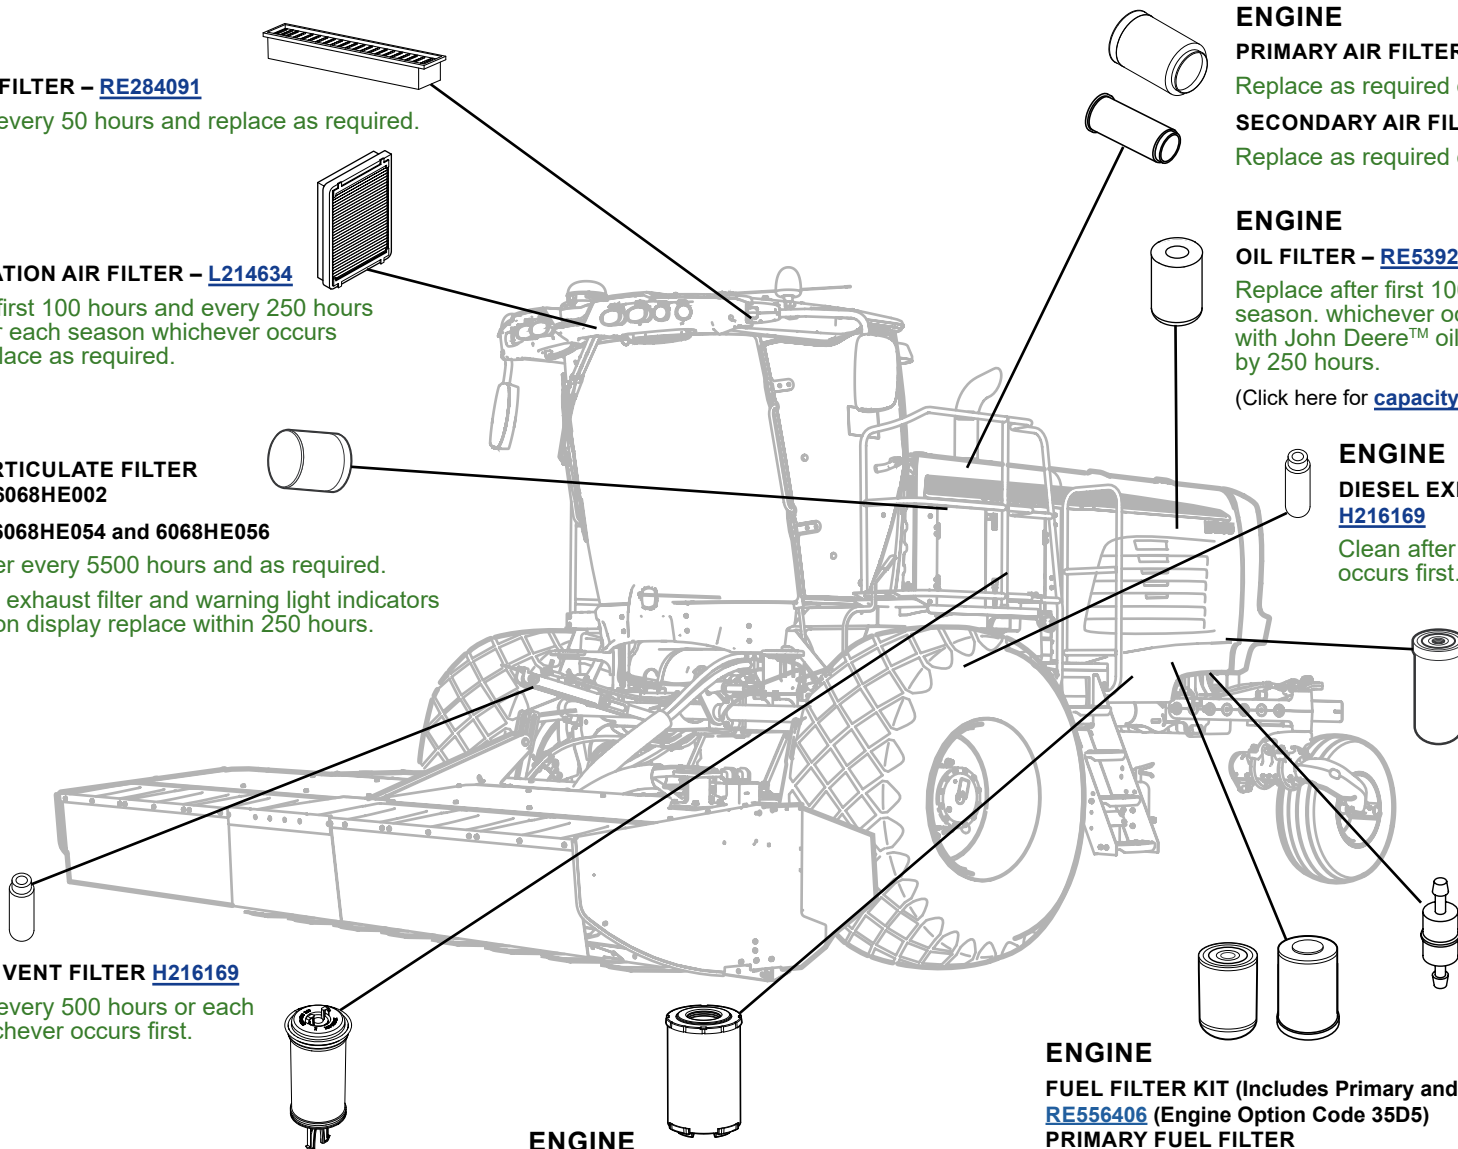

**JOHN DEERE**

Genuine Parts and Service

# CAPACITIES

## W260 Windrower

### CAPACITIES (Approximate):

**Fuel Tank:**  
**Diesel Fuel**

..... 586 L (155 gal)

**Cooling System:**  
**Cool-Gard™ II**

..... 56.78 L (15 gal)

**Engine Oil with Filter:**  
**Plus-50™**

..... 31.4 L (8.30 gal)

**Hydraulic System (Reservoir):**  
**Hy-Gard™**

..... 95 L (25 gal)

**Hydraulic System (Total):**  
**Hy-Gard™**

..... 143.8 L (38 gal)

**Diesel Exhaust Fluid (DEF) Tank:**

**John Deere™ Diesel Exhaust Fluid**

..... 24 L (6.34 gal)

**Final Drives Each:**  
**GL-5**

..... 3.8 L (1 gal)

**Pump Drive Gear Case:**  
**Hy-Gard™**

..... 3.8 L (1 gal)

**Pump Drive Gear Case: (Including Cooling Loop)**  
**Hy-Gard™**

..... 5.7 L (1.6 gal)

[Return to Filter Overview](#)

