

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 2000 Series Compact Utility Tractor - 2210

### FILTER KIT

[LVA21196](#)

M806418, CH15553, LVA12812, M113621


Each kit contains above filter, offering a complete solution for your maintenance needs to keep your tractor running at peak performance.

### ENGINE

#### FUEL FILTER

[CH15553](#)

Replace after every 500 hours.

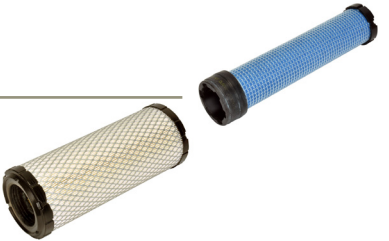

### ENGINE

#### PRIMARY AIR FILTER

[M113621](#)

#### SECONDARY AIR FILTER

[M123378](#)

Check after every 500 hours and replace as needed.

### TRANSMISSION

OIL FILTER – [AL221066](#)

### HYDRAULIC

OIL FILTER – [LVA12812](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



### ENGINE

#### OIL FILTER

[M806418](#)

Replace initially after 50 hours and after every 200 hours.

(Click here for [capacity](#))



**JOHN DEERE**

Genuine Parts and Service

[https://www.deere.com/en\\_US/parts/parts\\_by\\_industry/ag/fmi/filter\\_maintenance\\_information.page](https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page)

# CAPACITIES

## 2000 Series Compact Utility Tractor - 2210

### CAPACITIES (Approximate):

#### Fuel Tank:

..... 19 L (5 gal)

#### Cooling System:

##### Cool-Gard™ II

..... 3 L (0.8 gal)

#### Engine Crankcase W/ Filter:

..... 2.1 L (0.55 gal)

#### Transmission and Hydraulic System:

##### Hy-Gard™

..... 13 L (3.4 gal)

#### FRONT AXLE:

##### GL-5

..... 2.5 L (0.66 gal)

[Return to Filter Overview](#)

