



AGRICULTURAL RADIAL TIRES

Mitas Tires – DESIGNED TO PERFORM IN YOUR FIELDS

- Product Information
- Warranty Policy
- Service After the Sale

www.mitasag.com

Mitas

TECHNOLOGY FOR TECHNOLOGY

Agricultural technology is evolving rapidly, and today's high-horsepower tractors and combines demand tires that can keep up with the pace. That's why Mitas is committed to providing advanced radial tires to ensure your farming operation is expertly outfitted from the ground up.

If your tires aren't up to speed with your machinery, you may experience:

- Subpar machine performance
- Decreased productivity
- Increased operating costs
- Suboptimal crop yields
- Lost profits

EXPERTISE MEANS EVERYTHING

Given the high stakes and rewards of your operation, would you rather buy your tires from a manufacturer that **dabbles** in agriculture or one that focuses all its resources solely on agricultural and off-road tires? At Mitas, agriculture alone accounts for 70 percent of our global business.

When you purchase Mitas premium-grade agricultural radial tires, you can be confident they are engineered and manufactured to exacting standards for superior quality, durability and performance.



Table of Contents

Tire applications.....	3
List of tire sizes.....	5
SuperFlexionTire (SFT).....	7
Combine drive tires: AC 70 H/G/N and SuperFlexionTire (SFT)	11
Combine Steer: SFT/AC 65 IMP.....	13
Agriterra	15
AC 65	17
HC 70/AC 70 T	19
AC 85	21
AC 85 / AC 90 Sprayer	23
Load index.....	25
Speed symbol	26
Inflation pressure conversion table.....	26
Limited Warranty /Adjustment Policy – Farm Tires.....	27
Mitas Breakdown Service	34



Tire applications

We offer a wide range of tires for almost every piece of equipment and application – from high-horsepower tractors to massive combines, from field preparation to harvest.

MITAS RADIAL LINE



		SuperFlexionTire SFT	SuperFlexionTire SFT Combine AC 70 H/G/N
Product page		7	11
Speed rating up to		40 mph	40 mph
Tractor up to 100 HP	Traction (high torque)		
	Transport (high load)		
Tractor 100 – 200 HP	Traction (high torque)		
	Transport (high load)		
Tractor 200 HP +	Traction (high torque)		
	Transport (high load)		
Combine			
Sprayers, vegetable farming			



Our extensive line of premium radial agricultural tires offers solutions to all your needs, from our SuperFlexionTire series to our AC 85 and AC 90 series for row-crop applications to our wide footprint AC 70 and AC 65 series tires.



AC 65	AC 70 T/HC 70	AC 85	AC 85/AC 90 Sprayer
17	19	21	23
40 mph	40 mph	40 mph	40 mph
		 dual mounting	
		 dual mounting	

List of tire sizes

Size (inch)	Tire size Tread pattern	Page	
16"	200/70 R 16 AC 70 T	20	
	240/70 R 16 AC 70 T	20	
	260/70 R 16 AC 70 T	20	
	280/70 R 16 AC 70 T	20	
18"	320/65 R 16 AC 65	18	
	280/70 R 18 AC 70 T	20	
20"	280/70 R 20 AC 70 T	20	
	280/85 R 20 AC 85	22	
	300/70 R 20 AC 70 T	20	
	320/70 R 20 AC 70 T	20	
	360/70 R 20 AC 70 T	20	
	380/70 R 20 AC 70 T	20	
	420/65 R 20 AC 65	18	
	22.5"	385/65 R 22.5 AR-01	16
		445/65 R 22.5 AR-01	16
		460/65 R 22.5 IMP AR-01	16
560/60 R 22.5 IMP AR-02		16	
24"	280/85 R 24 AC 85	22	
	320/70 R 24 HC 70	20	
	320/70 R 24 AC 70 T	20	
	320/85 R 24 AC 85	22	
	340/85 R 24 AC 85	22	
	360/70 R 24 HC 70	20	
	360/70 R 24 AC 70 T	20	
	380/70 R 24 HC 70	20	
	380/70 R 24 AC 70 T	20	
	380/85 R 24 AC 85	22	
	420/70 R 24 HC 70	20	
	420/70 R 24 AC 70 T	20	
	420/85 R 24 AC 85	22	
	440/65 R 24 AC 65	18	
	460/70 R 24 IMP AC 70 G	14	
	480/65 R 24 AC 65	18	
	480/70 R 24 HC 70	20	
	480/70 R 24 AC 70 G	20	
	500/70 R 24 IMP AC 70 G	14	
	500/85 R 24 IMP SFT	14	
540/65 R 24 AC 65	18		
25"	1050/50 R 25 SFT	10, 12	
	620/75 R 26 SFT	12	
26"	750/65 R 26 SFT	10	
	600/55 R 26.5 IMP AGRITERRA 02	16	

Size (inch)	Tire size Tread pattern	Page
28"	650/65 R 26.5 IMP AGRITERRA 02	16
	710/50 R 26.5 IMP AGRITERRA 02	16
	800/45 R 26.5 IMP AGRITERRA 02	16
	280/85 R 28 AC 85	22
	320/85 R 28 AC 85	22
	340/85 R 28 AC 85	22
	380/70 R 28 HC 70	20
	380/70 R 28 AC 70 T	20
	380/85 R 28 AC 85	22
	420/70 R 28 HC 70	20
30"	420/70 R 28 AC 70 T	20
	420/85 R 28 AC 85	22
	440/65 R 28 AC 65	18
	480/65 R 28 AC 65	18
	480/70 R 28 HC 70	20
	480/70 R 28 AC 70 T	20
	500/80 R 28 IMP SFT	14
	540/65 R 28 SFT	10
	540/65 R 28 AC 65	18
	600/65 R 28 SFT	10
30.5"	600/65 R 28 AC 65	18
	600/65 R 28 IMP AC65	14
	600/70 R 28 SFT	10
	380/85 R 30 AC 85	22
	420/70 R 30 HC 70	20
	420/70 R 30 AC 70 T	20
	420/85 R 30 AC 85	22
	460/85 R 30 AC 85	22
	480/70 R 30 HC 70	20
	480/70 R 30 AC 70 T	20
	500/85 R 30 IMP SFT	14
	540/65 R 30 SFT	10
	540/65 R 30 AC 65	18
	540/65 R 30 IMP AC 65	14
600/65 R 30 AC 65	18	
600/70 R 30 SFT	10	
620/70 R 30 IMP SFT	14	
620/75 R 30 IMP SFT	14	
710/55 R 30 SFT	10	
710/60 R 30 SFT	10	
750/55 R 30 SFT	10	
650/65 R 30.5 IMP AGRITERRA 03	16	

Size (inch)	Tire size Tread pattern	Page
	750/60 R 30.5 IMP AGRITERRA 03	16
	850/50 R 30.5 IMP AGRITERRA 02	16
32"	270/80 R 32 AC 90	24
	270/95 R 32 AC 85	24
	320/85 R 32 AC 85	24
	320/90 R 32 AC 85	24
	650/75 R 32 AC 70 H	12
	650/75 R 32 AC 75 G	12
	680/85 R 32 CHO AC 70G	12
	680/85 R 32 AC 70 G	12
	800/65 R 32 AC 70 H	12
	800/65 R 32 AC 70 N	12
	800/70 R 32 SFT	10, 12
	800/70 R 32 CHO SFT	12
	900/60 R 32 SFT	10, 12
	900/60 R 32 CHO SFT	12
	900/70 R 32 SFT	10, 12
	900/70 R 32 CHO SFT	12
	1050/50 R 32 SFT	10, 12
	1250/50 R 32 SFT	10, 12
34"	320/85 R 34 AC 85	24
	380/85 R 34 AC 85	22
	420/85 R 34 AC 85	22
	460/85 R 34 AC 85	22
	480/70 R 34 HC 70	20
	480/70 R 34 AC 70 T	20
	500/85 R 34 IMP SFT	14
	520/70 R 34 HC 70	20
	520/70 R 34 AC 70 T	20
	540/65 R 34 AC 65	18
	600/65 R 34 AC 65	18
	650/60 R 34 SFT	10
	650/65 R 34 SFT	10
	710/60 R 34 SFT	10
36"	270/80 R 36 AC 90	24
38"	320/85 R 38 AC 85	24
	340/85 R 38 AC 85	22, 24
	380/80 R 38 AC 85	22
	380/95 R 38 AC 85	22
	420/85 R 38 AC 85	22
	460/85 R 38 AC 85	22
	480/70 R 38 HC 70	20

Size (inch)	Tire size Tread pattern	Page
	480/70 R 38 AC 70 T	20
	520/70 R 38 HC 70	20
	520/70 R 38 AC 70 T	20
	520/85 R 38 AC 85	22
	540/65 R 38 AC 65	18
	580/70 R 38 HC 70	20
	580/70 R 38 AC 70 T	20
	600/65 R 38 AC 65	18
	650/65 R 38 SFT	10
	650/65 R 38 AC 65	18
	650/75 R 38 SFT	10
	650/85 R 38 SFT	10
	710/70 R 38 SFT	10
	710/70 R 38 AC 65	18
	800/70 R 38 SFT	10
	800/70 R 38 CHO SFT	12
	900/60 R 38 SFT	10, 12
	900/60 R 38 CHO SFT	12
42"	300/85 R 42 AC 90	24
	300/95 R 42 AC 90	24
	480/80 R 42 AC 85	22
	520/85 R 42 AC 85	22
	580/85 R 42 SFT	10, 12
	650/65 R 42 AC 65	18
	650/75 R 42 SFT	10
	680/80 R 42 SFT	10, 12
	680/80 R 42 CHO SFT	12
	710/70 R 42 SFT	10
	710/75 R 42 SFT	10
	900/60 R 42 SFT	10
46"	300/95 R 46 AC 85	24
	380/90 R 46 AC 85	24
	480/80 R 46 AC 85	22
	520/85 R 46 AC 85	22
	710/65 R 46 SFT	10
48"	270/95 R 48 AC 90	24
	340/85 R 48 AC 85	24
50"	320/90 R 50 AC 85	24
	380/90 R 50 AC 85	22, 24
	480/80 R 50 AC 85	22
	480/95 R 50 AC 85	22
54"	320/90 R 54 AC 85	24
	380/105 R 54 AC 85	24



200 HP +

SuperFlexionTire (SFT)

Maximum load-carrying capacity and traction at as low as 6 PSI



> Developed for use on **high-horsepower tractors** (> 180 hp) and **combines, eliminating power hop.**



> Flexible sidewalls allow low inflation pressures for **high load-carrying capacities**, gentle ground handling and higher yields.



> **Maximum traction and outstanding productivity** thanks to transport speeds of 40 mph and a large contact patch.

SFT



Lower inflation pressure = Less soil compaction

- > The weight from the increased size of modern farm equipment may cause significant soil compaction, which negatively affects the quality of the farmers' most valuable asset.
- > The graphic below shows a comparison of how **SuperFlexion Technology** performs in the field. **SFT** allows for low inflation pressure (as low as 6 psi), creating a larger footprint and reducing soil compaction.

By protecting the soil, SFT increases efficiency, protects assets, reduces fuel consumption and provides opportunity to increase yield.





200 HP +

Tire sidewall flexibility



CONVENTIONAL RADIAL TIRE

MITAS SFT RADIAL TIRE


Flexible sidewalls deliver **maximum load-carrying capacity** at the lowest possible inflation pressures (as low as 6 psi) for **better traction** and optimum soil protection, even with the heaviest equipment.

Mitas SFT performs as well as competitive tires with IF technology

800/70R38 173D Mitas SFT (Super Flexion Tire)

TIRE LOAD LIMITS AT VARIOUS COLD INFLATON PRESSURES (4WD – 8 TIRES PER MACHINE)

			PSI	6	9	12	15	17	20	23
TRA IF Standard	179B/D	Duals		6,688	8,228	9,416	10,824	12,232	13,376	15,048
Mitas SFT (30 mph)	173D	Duals		6,888	8,227	9,489	10,575	11,594	12,370	13,243
Max Gross Machine Weight				55,104	65,816	75,912	84,600	92,752	98,960	105,944

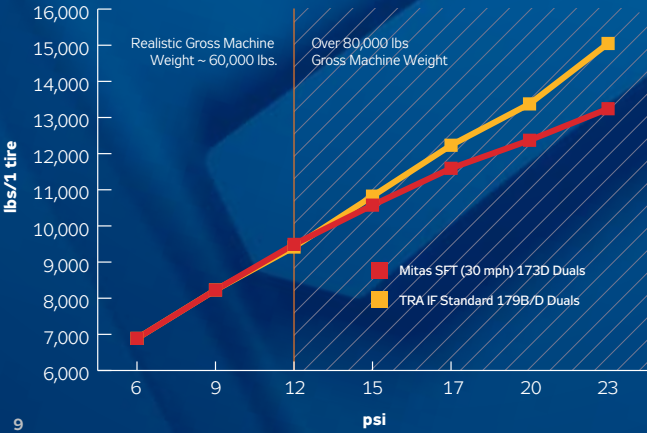

Tire Size	Load index	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 40 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
1050/50 R 25 *	175 D (178 AB)	38	41.7	65.9	76	721	15,215	35	827
750/65 R 26 *	166 D (169 AB)	DW 23 B	29.1	63.8	71	496	11,687	35	505
540/65 R 28 *	142 D (145 AB)	W 16 L	21.3	55.7	60	310	5,843	23	261
600/65 R 28	154 D (157 AB)	W 18 L	23.9	58.8	66	394	8,269	35	340
600/70 R 28 *	157 D (160 AB)	W 18 L	24.7	62.0	68	388	9,096	35	387
600/70 R 28 *	161 D (164 AB)	W 18 L	24.8	62.1	68	651	10,198	41	353
540/65 R 30 *	150 D (153 AB)	W 16 L	21.6	58.5	63	341	7,387	35	287
600/70 R 30	152 D (155 AB)	W 18 L	24.6	62.8	68	465	7,828	23	378
710/55 R 30 *	159 D (162 AB)	DW 23 B	27.2	59.1	71	372	9,647	35	425
710/60 R 30 *	162 D (165 AB)	DW 23 B	27.9	64.8	74	380	10,474	35	477
750/55 R 30	162 D (165 AB)	DW 23 B	28.3	62.4	71	465	10,474	35	485
800/70 R 32	175 AB (172 B)	DW 25 B	30.0	76.1	69	496	13 892*	35	708
900/60 R 32	176 AB (173 B)	DW 27 B	33.7	75.0	71	543	14 333*	35	726
900/70 R 32 *	188 AB (185 B)	DW 27 B	35.2	80.7	81	651	20 396*	47	967
1050/50 R 32	178 AB (178 B)	36.00 VA	40.0	74.4	76	736	16 538*	35	992
1250/50 R 32 *	188 AB (185 B)	44.00	48.4	80.3	81	930	20 396*	35	1,224
1250/50 R 32 *	194 AB (191 B)	44.00	48.4	80.3	81	930	24 035*	47	1,279
650/60 R 34	159 D (162 AB)	DW 20 B	25.6	64.5	71	374	9,647	35	477
650/65 R 34 *	161 D (164 AB)	W 18 L	25.7	67.7	71	377	10,198	35	468
710/60 R 34	164 D (167 AB)	DW 23 B	27.6	66.9	76	386	11,020	35	515
650/65 R 38 *	157 D (160 AB)	W 18 L	25.4	72.0	72	566	9,096	23	461
650/75 R 38	169 D (172 AB)	DW 21 B	26.3	76.5	76	550	12,789	35	585
650/85 R 38	173 D (176 AB)	DW 23 B	28.3	81.5	79	589	14,333	35	725
710/70 R 38 *	166 D (169 AB)	DW 23 B	29.0	77.1	79	620	11,687	23	650
710/70 R 38 *	171 D (174 AB)	DW 23 B	29.0	77.1	79	620	13,561	35	672
800/70 R 38	173 D (176 AB)	DW 25 B	30.1	80.8	78	682	14,112	23	772
800/70 R 38	178 D (181 AB)	DW 25 B	30.1	80.8	78	682	16,538	35	831
900/60 R 38	172 D (175 AB)	DW 27 B	34.3	81.1	79	698	13,892	23	889
900/60 R 38 *	178 D (181 AB)	DW 27 B	34.3	81.1	79	713	16,538	35	893
580/85 R 42	163 D (166 AB)	W 18	22.3	80.5	73	457	10,749	23	540
650/75 R 42 *	165 D (168 AB)	DW 21 B	25.6	80.1	77	512	11,356	23	589
680/80 R 42 *	180 D (183 AB)	DW 21 B	26.0	85.0	77	543	17,640	47	760
710/70 R 42	173 D (176 AB)	DW 23 B	28.8	81.5	79	527	14,333	35	751
710/75 R 42	175 D (178 AB)	DW 23 B	29.6	85.5	81	558	15,215	35	799
900/60 R 42	180 D (183 AB)	DW 27 B	33.9	84.6	79	744	17,640	35	940
710/65 R 46 *	174 D (177 AB)	DW 23 B	28.2	81.5	79	512	14,774	41	772

* calculated

* 31 mph

**For more information,
visit www.mitasag.com**



Combine Drive Tires: AC 70 H/G/N and SuperFlexionTire (SFT)

Innovative tires for gentle ground handling with combines



> **High load capacities** and low inflation pressures.



> **Minimized load** placed on soil structure, thanks to the wide and even distribution of ground pressure.



> **Low vibration** and smooth on-road ride when moving between fields.



> **Very productive and cost-efficient** thanks to performance in the field and in transport.

SFT Combine

AC 70 H




Tire Size	Load index	Tread pattern	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
								Load (lbs.)	Infl. (psi)	
680/85 R 32 CHO	178 A8 (175 B)	AC 70 G	DW 20 B	26.1	77.2	59	512	15,215	46	644
800/70 R 32 CHO	175 A8 (172 B)	SFT	DW 25 B	29.4	76.1	69	496	13,892	35	763
900/60 R 32 CHO	176 A8 (173 B)	SFT	DW 27 B	32.9	75.9	71	543	14,333	35	747
900/70 R 32 CHO	182 A8 (179 B)	SFT	DW 27 B	34.7	81.1	81	651	17,089	35	951
800/70 R 38 CHO	178 D (181 A8)	SFT	DW 25 B	30.2	80.4	69	667	16,538	35	860
900/60 R 38 CHO	178 D (181 A8)	SFT	DW 27 B	33.9	81.1	79	698	16,538	35	920
680/80 R 42 CHO *	180 D (183 A8)	SFT	DW 21 B	26.0	85.0	77	543	17,640	46	775
1050/50 R 25	175 D (178 A8)	SFT	38	41.7	65.9	76	721	15 215*	35	827
620/75 R 26	166 D (169 A8)	SFT	DW 20 B	24.6	62.6	70	400	12,350	46	452
650/75 R 32	167 A8 (164 B)	AC 70 H	DW 20 B	25.6	70.7	74	450	11,025	35	516
650/75 R 32	167 A8 (164 B)	AC 75 G	DW 20 B	25.0	70.8	58	431	11,025	35	485
650/75 R 32	172 A8 (169 B)	AC 70 G	DW 20 B	25.6	70.7	58	450	12,789	46	485
680/85 R 32	173 A8 (170 B)	AC 70 G	DW 20 B	26.1	76.8	59	504	13,230	35	576
680/85 R 32	178 A8 (175 B)	AC 70 G	DW 20 B	26.1	76.8	59	522	15,215	46	595
800/65 R 32	167 A8 (164 B)	AC 70 H	DW 25 B	31.3	71.7	82	589	11,025	23	672
800/65 R 32	172 A8 (169 B)	AC 70 H	DW 25 B	31.3	71.7	82	605	12,789	35	677
800/65 R 32	178 A8 (175 B)	AC 70 N	DW 25 B	29.3	72.2	69	512	15,215	46	649
800/70 R 32	175 A8 (172 B)	SFT	DW 25 B	30.0	76.1	69	496	13,892	35	712
900/60 R 32	176 A8 (173 B)	SFT	DW 27 B	33.7	75.0	71	543	14,333	35	729
900/70 R 32	188 A8 (185 B)	SFT	DW 27 B	35.2	80.7	81	651	20,396	46	967
1050/50 R 32	178 A8 (178 B)	SFT	36.00 VA	40.0	74.4	76	736	16,538	35	994
1250/50 R 32	188 A8 (185 B)	SFT	44.00	48.4	80.3	81	930	17,089	35	1224
1250/50 R 32	194 A8 (191 B)	SFT	44.00	48.4	80.3	81	930	24,035	46	1279
900/60 R 38	178 D (181 A8)	SFT	DW 27 B	34.3	81.1	79	713	16 538*	35	888
580/85 R 42	163 D (166 A8)	SFT	W 18	22.3	80.5	73	457	10 749*	23	507
680/80 R 42 *	180 D (183 A8)	SFT	DW 21 B	26.0	85.0	77	543	17 640*	46	760

* in preparation, calculated

*40 mph

Soil compaction comparison

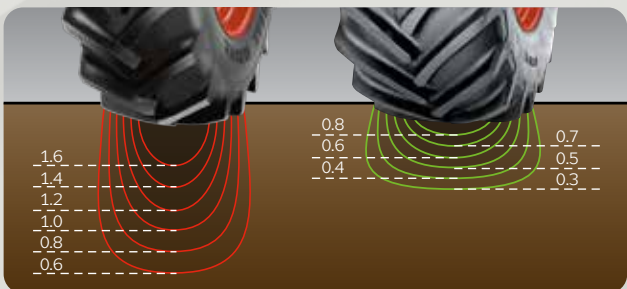

CONVENTIONAL TIRES

MITAS COMBINE TIRES SFT AND AC 70 H/G/N

The extremely wide tires distribute the weight of the machine across the surface area, lowering the compaction of the soil.



Combine Steer: SFT/AC 65 IMP

Tremendous flexion and load capacity make these tires a great fit for the steering axle of a combine



> **Outstanding traction** thanks to very large ground contact patch.



> **High load capacity** and optimal ground pressure distribution reduces soil compaction.



> **Long tire life** through optimized tread pattern design and high resistance to damage.



> **Suitable also for free-rolling** field applications.

SFT IMP

AC 65 IMP



Tire Size	Load index Free rolling/ Drive wheel	Tread pattern	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Max. speed 25 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
460/70 R 24 IMP	151 A8	AC 70 G	W 15 L	17.9	48.7	43	7,607	46	190
	163 A8						10,749		
500/70 R 24 IMP	155 A8	AC 70 G	W 16 L	19.5	51.7	48	8,544	41	235
	164 A8						11,025		
500/85 R 24 IMP	158 A8	SFT	W 16 L	20.8	57.4	48	9,371	41	284
	171 A8						13,561		
500/85 R 24 IMP	165 A8	SFT	W 16 L	21.5	57.4	48	11,356	52	284
	177 A8						16,097		
500/80 R 28 IMP	164 A8	SFT	W 16 L	20.4	58.9	48	11,025	46	298
	176 A8						15,656		
600/65 R 28 IMP	156 A8	AC 65	W 18 L	23.2	58.5	64	8,820	29	316
	168 A8						12,348		
500/85 R 30 IMP	164 A8	SFT	W 16 L	20.7	63.2	48	11,025	41	339
	176 A8						15,656		
540/65 R 30 IMP	156 A8	AC 65	W 16 L	20.7	58.5	60	8,820	35	275
	168 A8						12,348		
620/70 R 30 IMP	166 A8	SFT	W 18 L	24.6	62.8	60	11,687	35	433
	178 A8						16,538		
620/75 R 30 IMP	168 A8	SFT	W 18 L	23.2	66.6	68	12,348	35	485
	180 A8						17,640		
500/85 R 34 IMP *	166 A8	SFT	W 16 L	19.8	67.1	48	11,687	41	365
	178 A8						16,538		

* in preparation, calculated





Agriterra

A new generation of fast and powerful agricultural tires



> **Good self-cleaning properties** help keep the tread pattern free of mud, resulting in less slip, even in difficult conditions.



> **Low noise emissions** due to higher positive footprint share.



> **Wide agricultural use:** flat trucks, fast-moving agricultural trailers, tank containers etc.

AGRITERRA 03

AGRITERRA 02



Tire Size	Load index	Tread pattern	Design rim	Section width (in)	Outer dia. (in)	Max. speed 31 mph		Tire Weight (lbs.)
						Load (lbs.)	Infl. (psi)	
385/65 R 22.5 15 R 22.5	161 F	AR-01	11.75x22.5	15.3	42.2	10 198*	130	186
445/65 R 22.5 18 R 22.5	169 F	AR-01	14.00x22.5	17.9	45.3	12 789*	116	216
460/65 R 22.5 IMP	168/156 A8	AR-01	14.00 x 22.5	17.7	46.1	11 113**	72	186
560/60 R 22.5 IMP	161 D	AR-02	16.00x22.5	21.5	49.1	10,198	58	210
600/55 R 26.5 IMP	165 D	AGRITERRA 02	AG 20.00x26.5	24.6	52.6	11,356	58	318
650/65 R 26.5 IMP •	174 D	AGRITERRA 02	AG 20.00x26.5	25.4	59.8	14,774	58	353
710/50 R 26.5 IMP	170 D	AGRITERRA 02	AG 24.00x26.5	29.0	54.6	13,230	58	417
800/45 R 26.5 IMP •	174 D	AGRITERRA 02	AG 24.00x26.5	31.0	54.8	14,774	58	430
650/65 R 30.5 IMP	176 D	AGRITERRA 03	AG 20.00x30.5	27.8	63.8	15,656	58	487
750/60 R 30.5 IMP •	181 D	AGRITERRA 03	AG 24.00x30.5	29.7	65.9	18,191	58	518
850/50 R 30.5 IMP •	182 D	AGRITERRA 02	AG 28.00x30.5	33.9	64.0	18,743	58	573

* in preparation

* 50 mph

** 31mph



100 – 200 HP

AC 65

Versatile wide tire that delivers efficiency in field applications and in transport



> **Extremely economical** thanks to very good **traction** and low-wear tread compound.



> **Very high load-carrying capacity** through large volume of air.



> **Very gentle ground handling** thanks to a very large contact patch and exceptional load-carrying capacities.



> **Greater operator comfort** at road speeds as high as 40 mph.

AC 65



Tire Size	Load index	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
320/65 R 16	117 D (120 A8)	W 10	12.4	33.2	37	115	2,833	35	80
420/65 R 20	125 D (128 A8)	W 13	16.3	41.3	45	180	3,638	23	125
440/65 R 24	128 D (131 A8)	W 14 L	17.5	47.1	48	190	3,969	23	164
480/65 R 24	133 D (136 A8)	W 15 L	18.6	49.4	50	215	4,542	23	179
540/65 R 24	140 D (143 A8)	W 16 L	20.6	51.9	57	256	5,513	23	213
540/65 R 24	146 D (149 A8)	W 16 L	20.6	51.9	57	240	6,615	35	224
440/65 R 28	131 D (134 A8)	W 14 L	17.6	50.9	48	208	4,300	23	183
480/65 R 28	136 D (139 A8)	W 15 L	18.7	53.3	55	229	4,939	23	200
540/65 R 28	142 D (145 A8)	W 16 L	20.9	55.5	57	302	5,843	23	235
600/65 R 28	147 D (150 A8)	W 18 L	23.2	58.5	64	426	6,780	23	299
540/65 R 30	150 D (153 A8)	W 16 L	20.7	58.5	60	332	7,387	35	261
600/65 R 30	149 D (152 A8)	W 18 L	23.2	61.0	64	397	7,166	23	317
540/65 R 34	145 D (148 A8)	W 16 L	20.7	62.2	60	338	6,395	23	270
600/65 R 34	151 D (154 A8)	W 18 L	23.3	64.9	64	420	7,607	23	338
540/65 R 38	147 D (150 A8)	W 16 L	20.4	66.1	60	329	6,780	23	293
600/65 R 38	153 D (156 A8)	W 18 L	23.2	69.3	64	391	8,048	23	365
650/65 R 38	157 D (160 A8)	W 18 L	24.3	72.0	67	535	9,096	23	429
650/65 R 38	166 D (169 A8)	W 18 L	24.4	72.4	67	535	11,687	44	444
710/70 R 38	166 D (169 A8)	DW 23 B	27.9	75.8	73	527	11,687	23	591
650/65 R 42	165 D (168 A8)	DW 20 B	25.2	76.2	67	443	11,356	35	499


* Further admissible rims on request

Ground contact patch

CONVENTIONAL
TIRE



WIDE TIRE AC 65



The very large contact patch permits **high traction** and gentle ground handling, even with heavy equipment.



100 – 200 HP

HC 70/AC 70 T

Wide traction tire for heavy field work



> Deep lugs provide **greater traction** in the field.



> **Outstanding self-cleaning** between lugs reduces slip and improves pulling power.



> **Tremendous durability** and outstanding traction make this tire very **economical**.

AC 70 T



HC 70

Tire Size	Load index	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
320/70 R 24	116 D (119 A8)	W 10	12.8	43.9	48	155	2,756	23	97
360/70 R 24	122 D (125 A8)	W 11	14.4	45.0	48	184	3,308	23	132
380/70 R 24	125 D (128 A8)	W 12	15.6	46.9	50	196	3,638	23	149
420/70 R 24	130 D (133 A8)	W 13	17.4	49.0	55	226	4,190	23	174
480/70 R 24	138 D (141 A8)	W 15 L	19.8	52.0	55	288	5,204	23	215
380/70 R 28	127 D (130 A8)	W 12	15.6	50.9	50	211	3,859	23	157
420/70 R 28	133 D (136 A8)	W 13	17.2	53.1	55	248	4,542	23	201
480/70 R 28	140 D (143 A8)	W 15 L	19.6	56.0	58	287	5,513	23	229
420/70 R 30	134 D (137 A8)	W 13	17.0	54.8	55	246	4,675	23	204
480/70 R 30	141 A8 (144 A8)	W 15 L	19.6	58.0	58	305	5,678	23	260
480/70 R 34	143 D (146 A8)	W 15 L	19.4	62.6	60	372	6,009	23	283
520/70 R 34	148 D (151 A8)	W 16 L	21.2	65.0	66	357	6,946	23	316
480/70 R 38	145 D (148 A8)	W 15 L	19.5	66.9	60	339	6,395	23	308
520/70 R 38	150 D (153 A8)	W 16 L	21.1	68.9	66	385	7,387	23	339
580/70 R 38	155 D (158 A8)	W 18 L	23.5	73.1	68	456	8,544	23	435

AC 70T

Tire Size	Load index	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
200/70 R 16	94 A8 (94 B)	W 6	7.8	27.2	30	56	1,477	35	31
240/70 R 16	104 A8 (104 B)	W 8	9.6	29.0	34	74	1,985	35	42
260/70 R 16	109 A8 (109 B)	W 8	10.3	30.3	37	84	2,271	35	52
280/70 R 16	112 A8 (112 B)	W 9	11.2	31.4	38	97	2,470	35	60
280/70 R 18	114 A8 (114 B)	W 9	11.0	33.5	39	99	2,602	35	67
280/70 R 20	116 A8 (116 B)	W 9	10.9	35.7	42	100	2,756	35	73
300/70 R 20	110 A8 (110 B)	W 9	11.4	37.1	44	118	2,337	23	88
320/70 R 20	113 A8 (113 B)	W 10	12.6	38.3	45	121	2,536	23	96
360/70 R 20	120 A8 (120 B)	W 11	14.2	40.9	48	152	3,087	23	111
380/70 R 20	122 A8 (122 B)	W 12	15.1	42.3	53	171	3,308	23	119
320/70 R 24	116 A8 (116 B)	W 10	12.6	43.1	48	135	2,756	23	98
360/70 R 24	122 A8 (122 B)	W 11	14.2	45.3	55	160	3,308	23	131
380/70 R 24	125 A8 (125 B)	W 12	15.2	46.7	66	174	3,638	23	149
420/70 R 24	130 A8 (130 B)	W 13	17.0	49.6	63	195	4,190	23	180
480/70 R 24 *	138 A8 (138 B)	W 15 L	19.0	51.7	48	279	5,204	23	201
380/70 R 28	127 A8 (127 B)	W 12	14.6	50.2	57	175	3,859	23	157
420/70 R 28	133 A8 (133 B)	W 13	16.5	53.1	63	237	4,542	23	192
480/70 R 28	140 A8 (140 B)	W 15 L	18.9	55.7	66	282	5,513	23	218
420/70 R 30	134 A8 (134 B)	W 13	16.7	54.9	63	185	4,675	23	204
480/70 R 30	141 A8 (141 B)	W 15 L	19.5	58.1	66	326	5,678	23	237
480/70 R 34	143 A8 (143 B)	W 15 L	19.3	62.0	69	290	6,009	23	256
520/70 R 34	148 A8 (148 B)	W 16 L	20.6	64.7	69	346	6,946	23	300
480/70 R 38	145 A8 (145 B)	W 15 L	19.2	66.4	66	295	6,395	23	272
520/70 R 38	150 A8 (150 B)	W 16 L	20.4	69.0	69	363	7,387	23	320
580/70 R 38	155 A8 (155 B)	W 18 L	22.4	72.0	71	424	8,544	23	401

* Tread Pattern AC 70 G



100 – 200 HP

200 HP + DUAL MOUNTING

AC 85

Modern design delivers outstanding performance, traction, durability, and long tire life



> **Outstanding long tire life** thanks to the use of a wear-resistant tread compound.



> **Durable radial tire with balanced characteristics** for a wide range of applications both in the field and on the road.



> Large contact patch enhances **traction**.



> Tire that can be used for **dual mountings** on 4WD tractors.

AC 85



Tire Size	Load index	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
							Load (lbs.)	Infl. (psi)	
280/85 R 20 11.2 R 20	112 A8 (112 B)	W10	11.8	38.6	47	98	2,470	23	97
280/85 R 24 11.2 R 24	115 A8 (115 B)	W 10	11.7	42.9	48	119	2,679	23	93
320/85 R 24 12.4 R 24	122 A8 (122 B)	W 11	13.5	45.6	50	147	3,308	23	116
340/85 R 24 13.6 R 24	125 A8 (125 B)	W 12	14.6	46.8	52	157	3,638	23	132
380/85 R 24 14.9 R 24	131 A8 (131 B)	W 12	15.8	49.5	54	225	4,300	23	161
420/85 R 24 16.9 R 24	137 A8 (137 B)	W 15	18.7	52.0	59	250	5,072	23	185
280/85 R 28 11.2 R 28	118 A8 (118 B)	W 10	11.7	46.9	47	124	2,911	23	102
320/85 R 28 12.4 R 28	124 A8 (124 B)	W 11	13.0	49.6	50	157	3,528	23	132
340/85 R 28 13.6 R 28	127 A8 (127 B)	W 12	14.4	51.1	52	186	3,859	23	144
380/85 R 28 14.9 R 28	133 A8 (133 B)	W 12	15.8	53.6	54	215	4,542	23	181
420/85 R 28 16.9 R 28	139 A8 (139 B)	W 15	18.1	56.3	59	274	5,358	23	204
380/85 R 30 14.9 R 30	135 A8 (135 B)	W 12	15.7	56.2	54	222	4,807	23	190
420/85 R 30 16.9 R 30	140 A8 (140 B)	W 15	18.6	58.2	59	284	5,513	23	220
460/85 R 30 18.4 R 30	145 A8 (145 B)	W 16	20.3	60.9	64	323	6,395	23	262
380/85 R 34 14.9 R 34	146 A8 (146 B)	W 12	15.8	60.6	54	264	6,615	35	207
420/85 R 34 16.9 R 34	142 A8 (142 B)	W 15	18.5	62.9	59	333	5,843	23	240
420/85 R 34 16.9 R 34	147 A8 (147 B)	W 15	18.5	62.7	59	341	6,780	35	250
460/85 R 34 18.4 R 34	147 A8 (147 B)	W 16	20.4	66.0	64	303	6,780	23	287
340/85 R 38 13.6 R 38	133 A8 (133 B)	W 12	14.4	61.5	52	212	4,542	23	183
380/80 R 38 14.9 R 38	142 A8 (142 B)	W 12	15.0	62.6	55	256	5,843	35	209
380/95 R 38	147 D (150 A8)	W 12	15.0	66.1	55	256	6 780*	35	220
420/85 R 38 16.9 R 38	144 A8 (144 B)	W 15	18.5	66.8	59	295	6,174	23	272
460/85 R 38 18.4 R 38	149 A8 (149 B)	W 16	20.0	69.6	64	349	7,166	23	308
520/85 R 38 20.8 R 38	155 A8 (155 B)	W 16	21.5	73.1	68	432	8,544	23	406
480/80 R 42 18.4 R 42	151 A8 (151 B)	W 16	20.2	72.8	64	369	7,607	23	344
520/85 R 42 20.8 R 42	162 A8 (162 B)	W 16	21.1	77.4	68	434	10,474	35	456
480/80 R 46 18.4 R 46	158 A8 (158 B)	W 16	20.0	77.2	64	380	9,371	35	385
520/85 R 46 20.8 R 46	158 A8 (158 B)	W 16	21.5	80.4	68	519	9,371	23	464
380/90 R 50 14.9 R 50	151 A8 (151 B)	W 12	15.0	76.7	53	264	7,607	35	287
380/90 R 50 14.9 R 50	160 A8 (160 B)	W 12	15.4	76.4	53	253	9,923	58	314
480/80 R 50	159 A8 (159 B)	W 16	19.5	81.3	66	403	9,647	35	391
480/95 R 50	164 D (164 B)	W 16	19.6	84.1	68	419	11 025*	35	450

* 40 mph



AC 85 / AC 90 Sprayer

Narrow tires developed specially for row cultivation



> **Reduced tire width** eases driving between plants without causing damage, contributing to higher yields. Rounded shoulders, lugs and tire height also protect crops.



> **Cost-efficient** thanks to durable construction that offers high load capacity and transport speeds up to 40 mph.



> **Deep lugs** provide **excellent traction**, better directional stability and a high level of control.



> **Good self-cleaning properties** help keep the tread pattern free of mud, resulting in less slip, even in difficult conditions.

AC 85

AC 90



Tire Size	Load index	Tread pattern	Design rim	Section width (in)	Outer dia. (in)	Tread Depth (32nd)	Flat Plate (sq. in)	Max. speed 31 mph		Tire Weight (lbs.)
								Load (lbs.)	Infl. (psi)	
270/80 R 32	131 A8 (128 B)	AC 90	W 10	10.6	48.2	42	124	3,969	58	97
270/95 R 32	136 A8 (136 B)	AC 85	W 9	11.4	53.1	44	142	4,939	58	127
320/85 R 32	142 A8 (142 B)	AC 85	W 10	12.2	53.7	50	168	5,843	58	142
320/90 R 32	134 A8 (134 B)	AC 85	W 10	13.0	54.8	49	180	4,675	35	159
320/85 R 34	133 A8 (133 B)	AC 85	W 10	12.8	56.3	52	182	4,542	35	157
270/80 R 36	134 A8 (131 B)	AC 90	W 9	10.6	53.0	42	129	4,300	58	107
320/85 R 38	143 A8 (143 B)	AC 85	W 10	12.7	59.8	50	189	6,009	52	163
340/85 R 38	148 A8 (148 B)	AC 85	W 11	14.0	61.5	52	217	6,946	58	198
300/85 R 42	144 A8 (141 B)	AC 90	W 9	11.3	62.0	45	177	5,678	58	151
300/95 R 42	147 A8 (144 B)	AC 90	W 9	11.7	63.7	47	174	6,174	58	166
300/95 R 46	148 A8 (148 B)	AC 85	W 9	11.6	67.9	47	178	6,946	58	206
380/90 R 46	149 A8 (149 B)	AC 85	W 12	15.4	72.6	54	256	7,166	35	273
380/90 R 46	159 A8 (159 B)	AC 85	W 12	15.4	72.6	54	257	9,647	58	290
270/95 R 48	144 A8 (141 B)	AC 90	W 9	10.9	68.4	42	163	5,678	58	164
340/85 R 48	152 A8 (152 B)	AC 85	W 11	13.7	71.9	50	202	7,828	58	235
320/90 R 50	150 A8 (150 B)	AC 85	W 10	12.4	73.6	50	211	7,384	52	239
380/90 R 50	160 A8 (160 B)	AC 85	W 12	15.0	76.7	53	253	9,923	58	314
320/90 R 54	151 A8 (151 B)	AC 85	W 10	12.4	76.7	53	209	7,607	52	262
380/105 R 54 *	162 D (164 B)	AC 85	W 12	15.0	85.4	42		9,518**	46	375

* in preparation
** 40 mph



Load index

LI	lbs
80	992
81	1,019
82	1,047
83	1,074
84	1,103
85	1,136
86	1,169
87	1,202
88	1,235
89	1,279
90	1,323
91	1,356
92	1,389
93	1,433
94	1,477
95	1,521
96	1,566
97	1,610
98	1,654
99	1,709
100	1,764
101	1,819
102	1,874
103	1,929
104	1,985
105	2,040
106	2,095
107	2,150
108	2,205
109	2,271
110	2,337
111	2,403
112	2,470
113	2,536
114	2,602
115	2,679
116	2,756
117	2,833
118	2,911
119	2,999
120	3,087
121	3,197
122	3,308
123	3,418

LI	lbs
124	3,528
125	3,638
126	3,749
127	3,859
128	3,969
129	4,079
130	4,190
131	4,300
132	4,410
133	4,542
134	4,675
135	4,807
136	4,939
137	5,072
138	5,204
139	5,358
140	5,513
141	5,678
142	5,843
143	6,009
144	6,174
145	6,395
146	6,615
147	6,780
148	6,946
149	7,166
150	7,387
151	7,607
152	7,828
153	8,048
154	8,269
155	8,544
156	8,820
157	9,096
158	9,371
159	9,647
160	9,923
161	10,198
162	10,474
163	10,749
164	11,025
165	11,356
166	11,687
167	12,017

LI	lbs
168	12,348
169	12,789
170	13,230
171	13,561
172	13,892
173	14,333
174	14,774
175	15,215
176	15,656
177	16,097
178	16,538
179	17,089
180	17,640
181	18,191
182	18,743
183	19,294
184	19,845
185	20,396
186	20,948
187	21,499
188	22,050
189	22,712
190	23,373
191	24,035
192	24,696
193	25,358
194	26,019
195	26,791
196	27,563
197	28,334
198	29,106
199	29,988
200	30,870
201	31,973
202	33,075
203	34,178
204	35,280
205	36,383
206	37,485
207	38,588
208	39,690
209	40,793
210	41,895
211	42,998

Speed symbol

Speed symbol	A1	A2	A3	A4	A5	A6	A7	A8	B	C	D	E	F	G	J	K
Speed (mph)	3	6	9	12	16	20	22	25	30	35	40	44	50	56	62	68
Speed (km/h)	5	10	15	20	25	30	35	40	50	60	65	70	80	90	100	110

Inflation pressure conversion table

p. s. i.	15	22	29	36	44	51	58	65	73	80
kPa	100	150	200	250	300	350	400	450	500	550
bar	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5

p. s. i.	87	94	102	109	116	123	131	138	145	152
kPa	600	650	700	750	800	850	900	950	1000	1050
bar	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5

Limited Warranty / Adjustment Policy – Farm Tires

The Limited Warranty / Adjustment Policy (“Policy”) is a promise of replacement under certain specified conditions.

This Policy applies to radial agricultural Mitas tires in normal agricultural service displaying adjustable conditions (see Section 4) and does not require the existence of a manufacturing defect in order to qualify for adjustment.

OUR TIRES ARE COVERED WITH:

72-MONTH WARRANTY

- Free replacement policy during the first 24 months or 25% of tread wear from the date of purchase, including a service allowance (or the first registration of the vehicle).
- Pro-rated replacement credit policy after the free replacement policy expires.

36-MONTH FIELD HAZARD AND STUBBLE DAMAGE POLICY:

- Up to 12 months — 75% credit allowance
- Up to 24 months — 50% credit allowance
- Up to 36 months — 25% credit allowance

This Policy is not a guarantee that the Mitas tire will not fail or become unserviceable if neglected or mistreated.

1. Eligibility

This Policy is eligible for the following:

1st Quality New Radial Mitas Tires (“Tires”) manufactured and/or sold after September 1, 2012, and distributed by Mitas Tires North America, Inc. (“Mitas”) and bearing the manufacturer’s identification and DOT production date and used in normal agricultural service. This Policy applies to either the Original Consumer/Owner or User of the Tires or the original purchaser of the agricultural equipment mounted with the Tires (“Customer”).

Mitas brand radial agricultural tires in the following designations:

- AC 85
- AC 70 H
- AC 90
- AC 70 T
- AC 70 N
- AC 65
- AC 70 G
- HC 70
- SFT

2. What is the adjustment policy and for how long?

Warranty coverage is for a maximum period of six years (72 months) from the date of purchase and not more than eight years (96 months) from the date of manufacture.* If a Tire in normal agricultural service becomes unserviceable within the time or treadwear periods shown below, it will be replaced with a Comparable New 1st Quality Premium Radial Mitas Brand Tire (“Replacement Tire”) according to A, B, and C below.

A. FREE REPLACEMENT POLICY

RADIAL AGRICULTURAL TIRE

Time	Treadwear
First 24 Months	First 25 %
(whichever comes first)	

Actual proof of purchase must be attached to the claim.

* If a Tire’s months of service cannot be accurately determined, the adjustment credit will be based upon the date of manufacture (Tire production date), e.g., 3812, 38th week of 2012, and tread depth remaining. New Warranty Conditions valid for Tires manufactured after September 1, 2012.

Mitas will also make a service allowance for Tires covered under the Free Replacement Policy as follows:

- A flat service fee reimbursement of \$ 75 per Tire and
- A labor reimbursement of \$ 1 per 10 mm of tread width per Tire (e.g., 480/80 R 42 will be \$ 48) and
- A disposal allowance of \$ 0.07 per lb per Tire.

B. PRO-RATA REPLACEMENT CREDIT POLICY

After the Free Replacement Policy expires and the Tire is still within six years (72 months) of the date of purchase*, the Customer will receive a Replacement Tire considering a credit allowance equal to the % of tread depth remaining.

* If a Tire's months of service cannot be accurately determined then the credit will be based on the date of manufacture.

C. FIELD HAZARD / STUBBLE DAMAGE POLICY

1. Stubble penetration(s) are not covered by the stubble damage warranty.
2. To qualify for a stubble damage claim, a mechanical device must have been used to push down severe stubble prior to any contact with the Tire and proof provided to substantiate the claim.
3. The field hazard / stubble damage qualifying period is three years following the purchase of the Tire or machine. For Tires acquired as part of original equipment purchase, a copy of the equipment invoice must be provided.
4. The Tire must be completely unserviceable and non repairable.
5. There are no reimbursements for mounting or any other service charges of any kind (such as liquid ballasting).
6. For stubble damage claims, the percentage of allowance will be based on the manufacturers' evaluation of the fulfillment of the customer's obligations for stubble damage warranty as set out below. If a Tire running under normal agricultural service becomes completely

unserviceable and non-repairable due to field hazard or stubble damage, the Customer will receive a replacement credit towards the purchase of a Replacement Tire equal to the % shown below:

Tire Service*	Tread Depth Remaining	% Credit Allowance
up to 12 months	75% or more	up to 75%
up to 24 months	50% or more	up to 50%
up to 36 months	25% or more	up to 25%
No credit allowed after 36 months or less than 25% tread depth remaining		

Tubes are not eligible under the Field Hazard / Stubble Damage Policy.

* If a Tire's months of service cannot be accurately determined, the adjustment credit will be based upon the production date of the Tire and remaining tread depth.

CUSTOMER'S OBLIGATIONS FOR STUBBLE DAMAGE WARRANTY

In order to qualify for stubble damage warranty, the Customer must employ good operating practices to minimize the effect of stubble damage such as, but not limited to,

1. Making the first tillage pass parallel to the rows with Tires aligned between the rows not directly on the stubble.
2. Use of mechanical device to push down stubble prior to any contact with the Tires.

3. How pro-rata credits are calculated

The Tire replacement credit (% of tread depth remaining or % specified under Field Hazard / Stubble Damage Policy and within the specific time period) will be multiplied by the adjusting dealer's regular buying price (excluding tax) at the time of the claim for the Replacement Tire.

4. What is not covered by the policy?

A. NON-ADJUSTABLE CONDITIONS

Tread wear-out or tire failure resulting from improper mounting, demounting, damaged rim, rim slip, tire/wheel assembly imbalance, mismounting or adjacent tires trueing, chain damage, improper storage, improper repair or insertion or sealant, balance or filler material, petroleum damage, extreme temperature exposure, breaks or any similar mechanical problem, loss or liquid ballast, misuse, negligence or abusive driving such as tire spinning, racing or pulling contests, fire or accident damage, use of, improper tube, broken or kinked beads, repairable puncture or cuts, field hazards (unless specifically covered by the Field Hazard/Stubble Damage Policy), improper operation-load, speed or roading, and inflation practices outside of the manufacturer's specification and/or causing excessive operational temperatures to exceed the Tire capabilities.

Tire used in logging, industrial, earthmoving or land-leveling operations.

Intentional alteration of either the appearance or physical characteristics of the Tire.

B. GENERAL EXCLUSIONS

Tires in service for longer than 6 years (72 months) from the date of purchase are not covered by the Policy. If satisfactory proof of purchase date is not provided, the date of manufacture (Tire production date) will be used.

No Mitas employee, retailer or dealer has the authority to make any warranty, representation, promise or agreement on behalf of Mitas except as stated in this Policy.

Tires on agriculture equipment registered and normally operated outside the United States and Canada are not covered under this Policy.

Tread wearout is not covered by this Policy because of variation in equipment conditions of use and driver habits. Mitas does not warrant that any tire will achieve a predetermined period of service.

LIMITATION OF REMEDY: TO THE EXTENT PERMITTED BY LAW, MITAS DISCLAIMS LIABILITY FOR ALL CONSEQUENTIAL AND INCIDENTAL DAMAGES.

Some states do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation may not apply to the Customer. This Policy gives the Customer the rights, and the Customer may also have other rights, which vary from state to state.

5. Mitas' obligations

Replacement qualifying under the Policy will be made by any Mitas agricultural tire dealer or equipment dealer authorized to handle a Mitas adjustment. Mitas will replace the Tire pursuant to the terms of this Policy.

6. Customer's obligation

To make a claim under this Policy concerning any problems with a Tire covered by the Policy, the Customer must present its claim with the Tire to any Mitas-appointed retailer or distributor authorized to handle tire adjustments. Tires replaced on an adjustment basis become the property of Mitas. The Customer will be required to sign the Mitas Adjustment Replacement Claim Form or a dealer replacement sales receipt.

The Customer is responsible for payment of all applicable taxes, demounting / mounting and balancing of all tires. The Customer is also responsible for payment for any parts or services ordered regardless of the months of service. This includes payment for tire rotation, alignment, towing, road service, valve stems and tire repair.

LOCATION, LOCATION, LOCATION

Mitas is a global enterprise with a manufacturing facility in Charles City, Iowa. Our superior agricultural tires are created locally in the midwest to provide quick access to our products and high-quality service when you need it. Our name is trusted worldwide, so you'll enjoy peace of mind knowing your tires come from a long line of excellence.

SERVICE AND QUALITY YOU CAN TRUST

Our Charles City facility is staffed by a dedicated team of professionals working toward a common goal: bringing innovative ideas and unmatched quality to the farmers of America.

We take pride in our work. Every new tire that rolls off the production line represents our commitment – and our promise – to bring you the best tires to suit your needs and strengthen your bottom line.

QUALITY CONTROL AND MANAGEMENT

Mitas considers excellence the driving force of our products, and in striving to produce top-quality agricultural tires, our factories are ISO certified and audited by all major original equipment manufacturers.

Additional quality assurance measures include:

- **A thorough Research and Development Center located in Zlin, Czech Republic, featuring divisions in tire design, compounding and dynamic testing.**
- **Extensive testing of new tire sizes, before introduction, to ensure quality management procedures are followed at each step of production.**

SERVICE AFTER THE SALE

When you purchase tires from Mitas, you're also buying reliable, on-demand service. Our products are manufactured in the most modern facilities worldwide and to the highest industry standards, but as is the case with any tire, a breakdown can occur. In the event of a tire problem, Mitas is here to get you back in the field as quickly as possible.

Our breakdown resolution features:

- **Customer service technicians available by phone.**
- **Strategic geographic coverage: Over 50 distributors supplying 1,500+ points of sales and service.**
- **Two warehouses located in Cedar Falls, Iowa and Charles City, Iowa, with an in-stock capacity of over 10,000 tires.**
- **Express delivery service direct from the warehouse.**

Trust Mitas **Breakdown Service** to:

- Locate the nearest tire dealer
- Be at your side when you have a tire problem
- Provide expert technical assistance and follow-up
- Have you up and running within 48 hours

Mitas



Tire Emergency?

1-855-313-0219

mitasag.com/contacts

tech@mitas-tires.com

TIRE DEALER / DISTRIBUTOR

Mitas Tires North America Inc.

Technical Help Desk:

1200 Rove Avenue
Charles City, IA 50616 USA
Phone: +1-641-257-6491
Fax: +1-641-228-3442
tech@mitas-tires.com

Commercial Contact and Customer Service:

7400 Carmel Executive Park, Suite 100
Charlotte, NC 28226 USA
Phone: +1-704-542-3422
Fax: +1-704-542-3474
info@mitas-tires.com

Breakdown Service:

1-855-313-0219

www.mitasag.com

© CGS / M:11 / 2012 / I

Mitas