

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

5E Series - 5076E, 5076EF, 5076EL, 5082E, 5090E, 5090EL and 5090EH Tractors

## CAB

FRESH AIR FILTER  
[RE198488](#)

Clean after every 250 hours and annually. change as required.



## CAB

RECIRCULATION AIR FILTER  
[RE195491](#)

Clean after every 250 hours and annually. change as required



## CAB

ACTIVATED CARBON AIR FILTER  
[SJ14288](#)

Replace after every 250 hours.



## HYDRAULIC

FUEL FILTER - [RE45864](#)  
(5082E, 5090E, 5090EH) - [SJ28834](#)


Replace after first 100 hours then after every 500 hours.



## ENGINE

PRIMARY AIR FILTER - [KV16429](#)  
SECONDARY AIR FILTER - [AT171854](#)

Replace after every 1000 hours or annually whichever occurs first. Change as required.

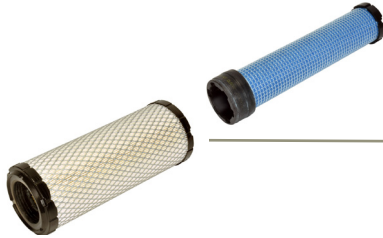

## ENGINE

PRIMARY FUEL FILTER  
[AL153517](#)  
(5082E, 5090E, 5090EL, 5090EH) - [RE522868](#)

FINAL FUEL FILTER  
[RE60021](#)

Replace after every 500 hours for Cab model or else for OOS model replace after every 250 hours.



## ENGINE

DIESEL EXHAUST FLUID (DEF)  
INJECTION PUMP  
(5090E) - [DZ114640](#)

Replace after every 500 hours.

(Click here for [capacity](#))



TRANSMISSION  
OIL FILTER - [SJ10672](#)

Replace after first 100 hours then after every 500 hours.

(Click here for [capacity](#))



## ENGINE

OIL FILTER  
[RE504836](#)

Change after first 100 hours then after every 250 hours. (If diesel fuel has a sulfur content greater than 0.7 percent, reduce service interval to half)

(Click here for [capacity](#))



**JOHN DEERE**  
Genuine Parts and Service

[http://www.deere.com/en\\_US/parts/service/support/filter/overviews](http://www.deere.com/en_US/parts/service/support/filter/overviews)

# CAPACITIES

## 5E Series - 5076E, 5076EF, 5076EL, 5082E, 5090E, 5090EL and 5090EH Tractors

### CAPACITIES (Approximate):

#### Fuel Tank:

5076E, 5076EL, 5082E, 5090E, 5090EL, 5090EH(OOS).....	95 L (25 gal)
5082E, 5090E, 5090EL, 5090EH (Cab).....	125 L (33 gal)
5076EF.....	60 L (16 gal)

#### Cooling System:

##### Cool-Gard™ II

.....10.8 L (2.37 gal)

#### Crankcase with Filter:

##### Plus-50™ II

.....8.5 L (1.86 gal)

#### Transmission and Hydraulic System:

##### Hy-Gard™

Dry Clutch (Synchronized Transmission, 2WD)

5076E, 5076EL, 5082E, 5090E, 5090EL, 5090EH.....38 L (10 gal)

Dry Clutch (Synchronized Transmission, MFWD).....41.8 L (11 gal)

12X12 PowrReverser™

5076E, 5076EL, 5082E, 5090E, 5090EL, 5090EH.....43.5 L (11.5 gal)

#### Mechanical Front Wheel Drive (MFWD) Axle Housing:

##### Hy-Gard™

.....5.0 L (1.09 gal)

#### Mechanical Front Wheel Drive (MFWD) Hubs (Each):

##### Hy-Gard™

.....0.6 L (0.13 gal)

#### Rear Axle:

##### Hy-Gard™

5090E, 5090EL, 5090EH

High Crop Axle (Each).....17 L (4.5 gal)

High Crop Axle with Space(Each).....20 L (5.3 gal)

[Return to Filter Overview](#)

