

REPLACEMENT PARTS GUIDE

652B Quik-Trak™ Mower with 52 inch Side Discharge Deck

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 hours or Annually.



ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.



[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.



JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)

GREASE GUN

[TY26183](#)

Change As Required.



FUEL FILTER - IN - LINE

[UC21217](#)


Change every 300 hours.



SPARK PLUG

[M805853](#)

Change every 1000 hours.

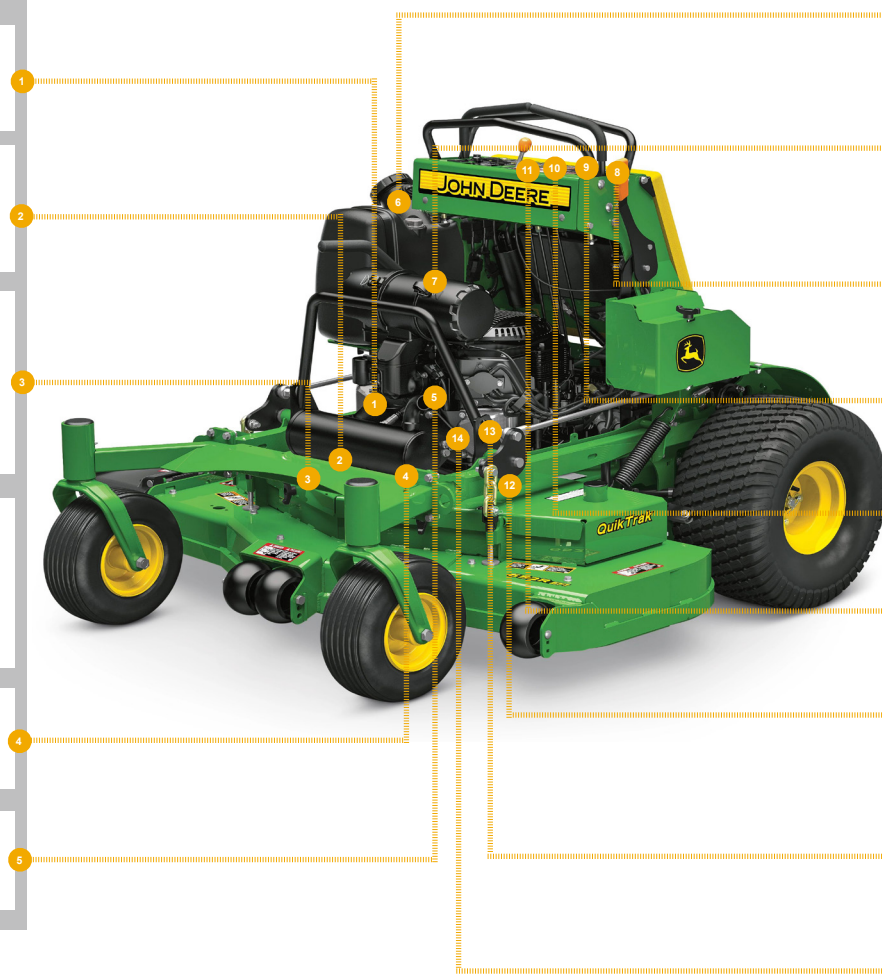

FUEL & AIR



FILLER CAP

[TCU34085](#) (S/N: - 075001)

[AUC14828](#) (S/N: 075001-)



MUFFLER

[TCA23223](#) (S/N: - 020000)

[TCA24531](#) (S/N: 020001-)

ELECTRICAL



ROTARY SWITCH

[TCA22740](#) (S/N: - 045000)



[AUC18708](#) (S/N: 045001-)



CONTROL LEVER THROTTLE CABLE

[AUC18415](#) (S/N: - 0110000)

[AUC20360](#) (S/N: 0110001-)



REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



TRACTION DRIVE BELT

[UC28182](#) (LGTH = 1627 mm, WIDTH = 14 mm,
TK = 15 mm)

REPLACEMENT PARTS GUIDE

652R Quik-Trak™ Mower with 61 inch Side Discharge Deck



MOWER BLADE

[TCU34280](#) (CUT LENGTH = 165.1 mm)




MULCH BLADE

[UC10725](#) (CUT LENGTH = 177.8 mm)



MOWER DECK LEVELLING

[AM130907](#)

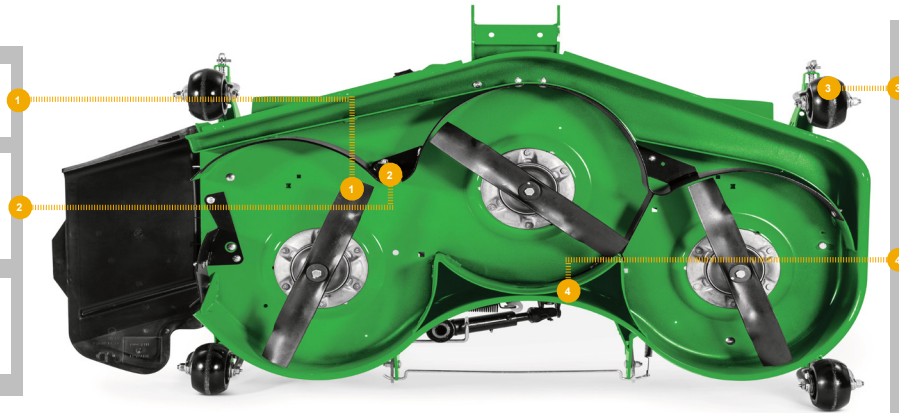

GAUGE WHEELS

[UC28193](#)



FLAT MOWER BELT

[TCU34219](#) (S/N: - 045000) (PRIMARY)
(LGTH = 2134.61 mm,
WIDTH = 16.66 mm, TK = 10.31 mm)



[UC11266](#) (S/N: 045001-) (PRIMARY)
(LGTH = 2125 mm, WIDTH = 16 mm)



[TCU34215](#) (SECONDARY)
(LGTH = 1169.41 mm,
WIDTH = 16.66 mm, TK = 10.31 mm)

