


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9560, 9660 Walker and Sidehill Series Combines

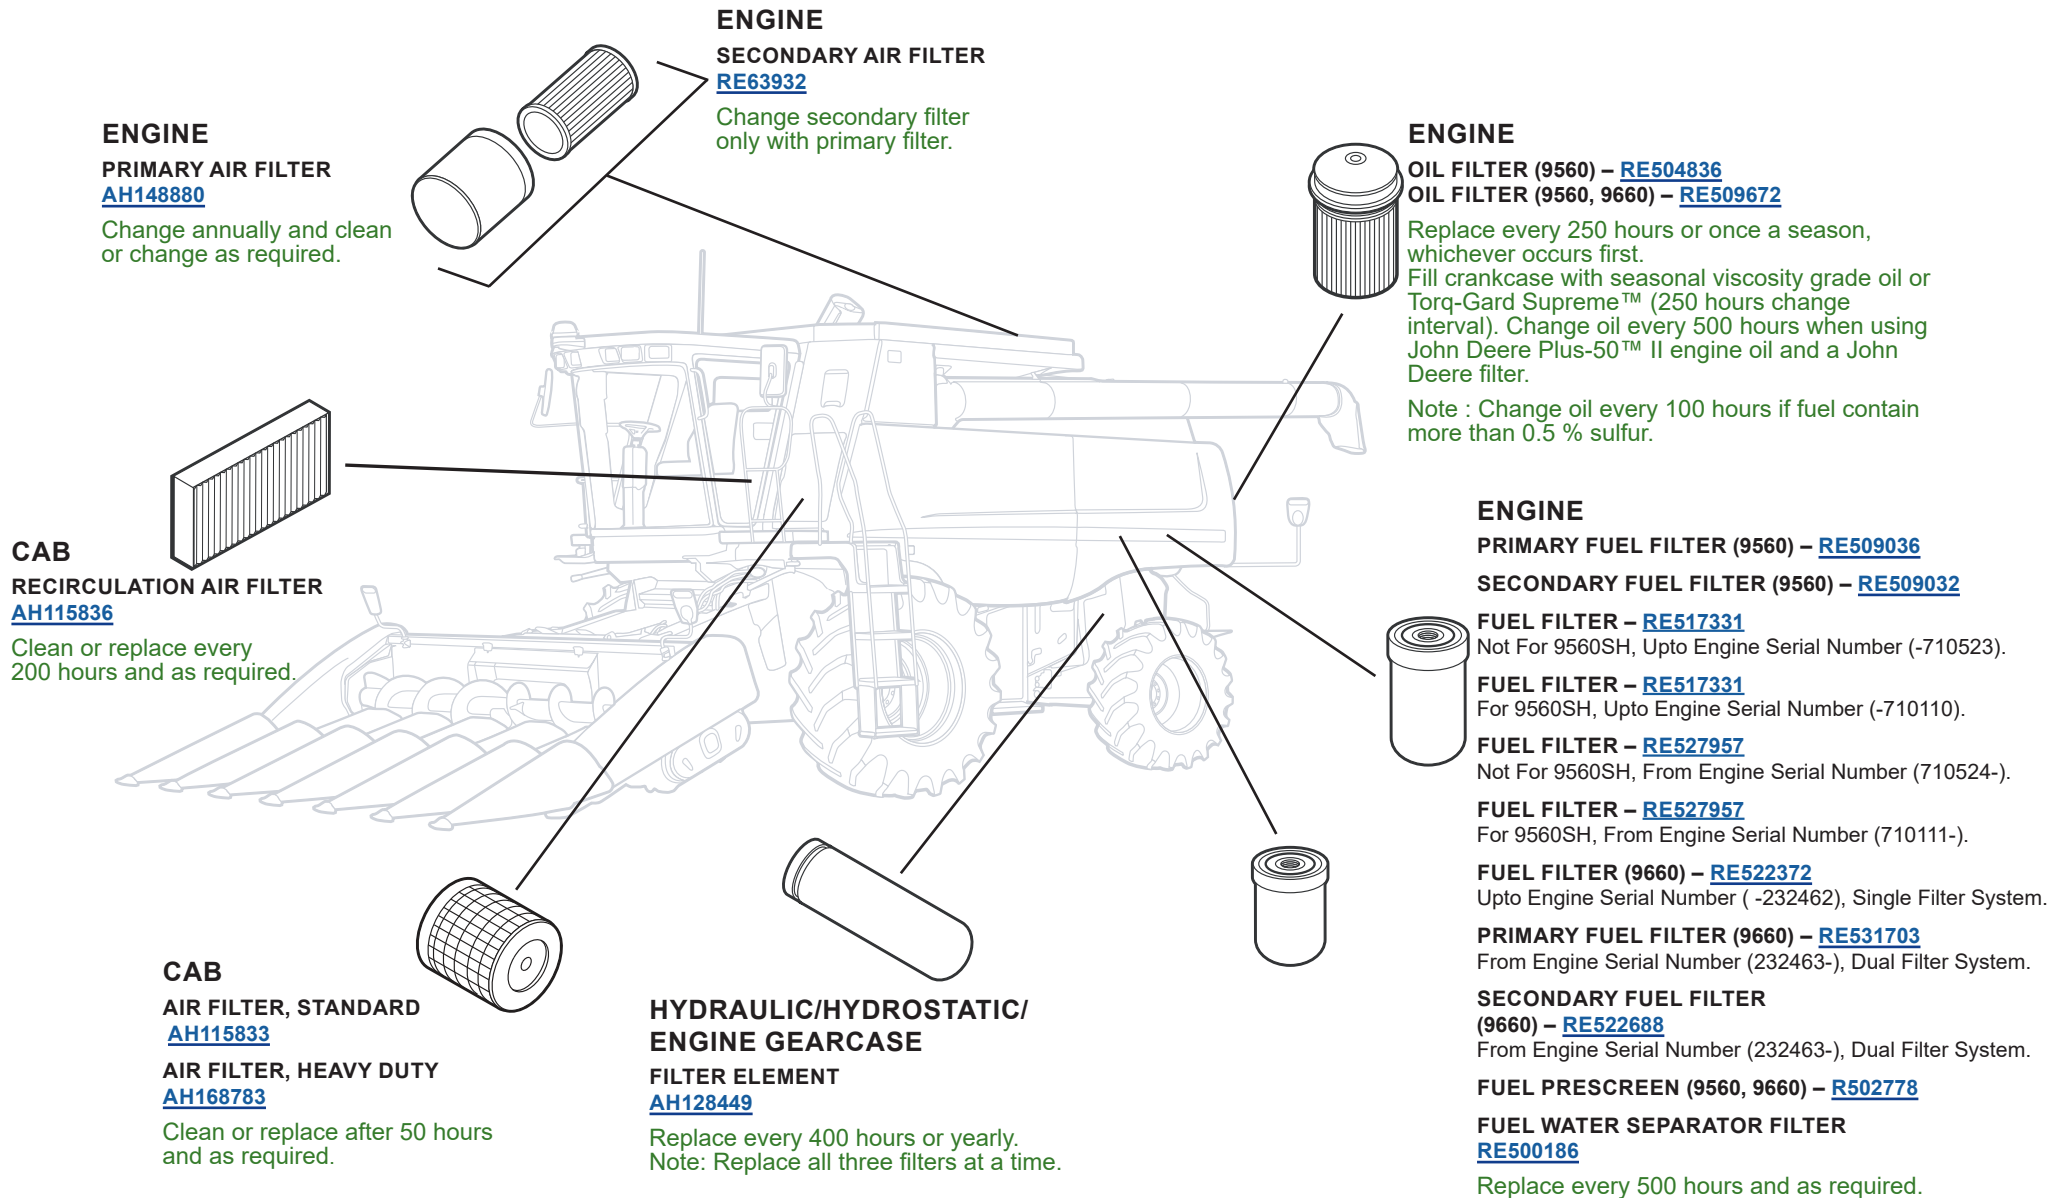

CAPACITIES

9560, 9660 Walker and Sidehill Series Combines

CAPACITIES (Approximate):

Fuel Tank:

9560, 9560SH, 9660..... 565 L (149.2 gal)

Cooling System with Heater:

Cool-Gard™

9560, 9560SH, 9660..... 40 L (10.5 gal)

Engine Crankcase with Filter:

Torq-Gard Supreme™ or Plus-50™ II

9560, 9560SH..... 32 L (8.4 gal)

9660..... 29.5 L (7.7 gal)

Transmission:

GL-5

9560, 9560SH, 9660..... 9.6 L (2.5 gal)

Final Drives (Each):

GL-5

9560, 9560SH..... 8.0 L (2.1 gal)

9660..... 8.0 L (2.1 gal)

Feeder House Reverser Gearcase without Cooler:

GL-5

9560, 9660..... 2.3 L (0.6 gal)

9560SH..... 0.9 L (0.2 gal)

Feeder House Reverser High-Capacity with Cooler:

GL-5

9560, 9560SH, 9660..... 3.5 L (0.9 gal)

Primary Countershaft Drive Gearcase:

GL-5

9560, 9560SH, 9660..... 1.2 L (0.3 gal)

Beater / Straw Walker Drive Gearcase:

John Deere Corn Head Grease

9560, 9560SH, 9660..... 0.4 L (0.1 gal)

Dual-Range Cylinder Drive Gearcase:

GL-5

9560, 9560SH, 9660..... 1.9 L (0.5 gal)

Engine Gearcase:

Low Viscosity Hy-Gard™

9560, 9560SH, 9660..... 16 L (4.2 gal)

Loading Auger Gearcase:

GL-5

9560, 9560SH, 9660..... 3.8 L (1 gal)

Hydraulic / Hydrostatic Reservoir:

Low Viscosity Hy-Gard™

9560, 9560SH, 9660..... 34 L (8.9 gal)

[Return to Filter Overview](#)

