


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9650, 9660 CTS Combine

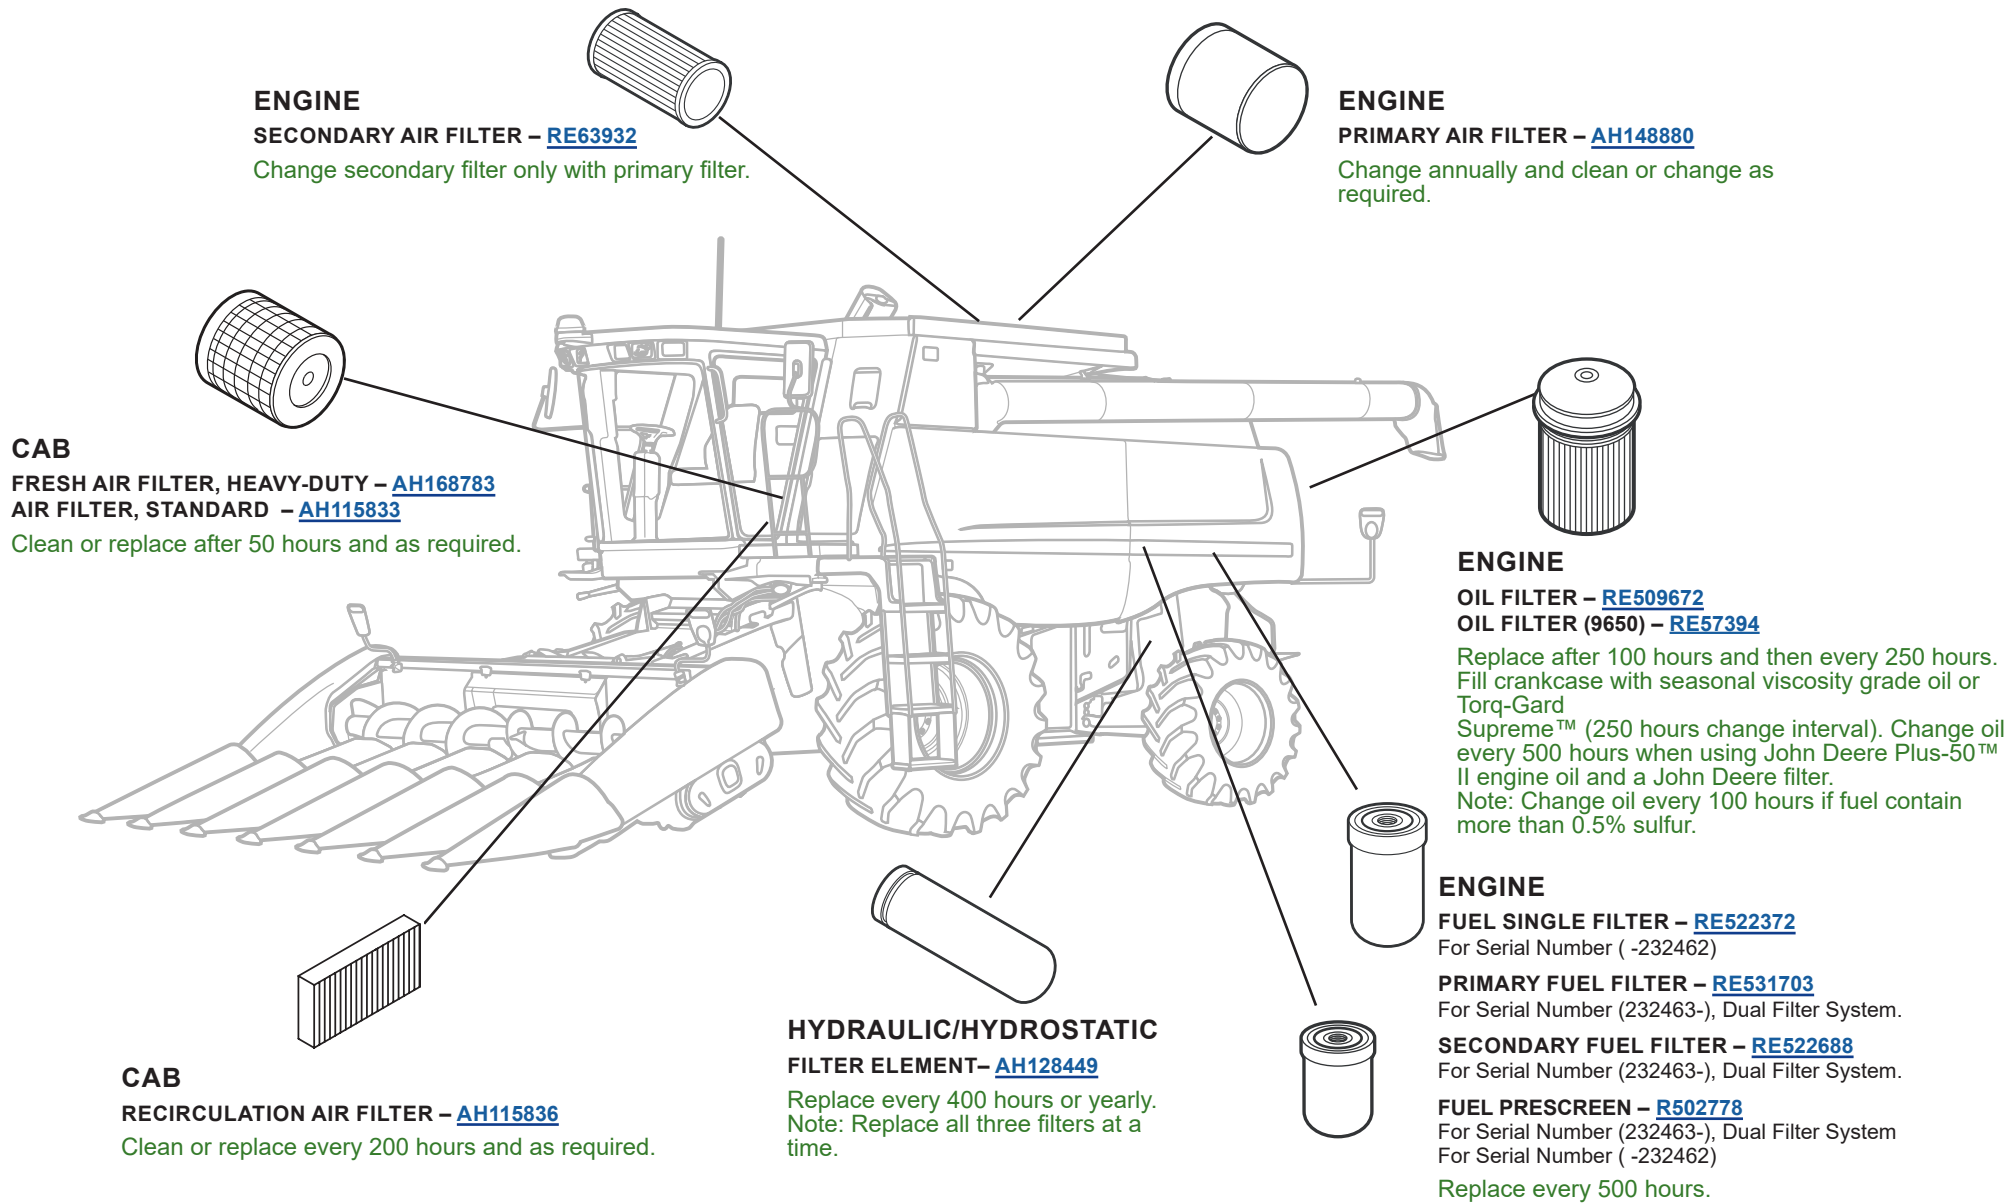

CAPACITIES

9650, 9660 CTS Combine

CAPACITIES (Approximate):

Fuel Tank:

9650, 9660..... 565 L (149.2 gal)

Cooling System with Heater:

Cool-Gard™

9650 (-695400)..... 38 L (10.3 gal)

9650 (695401-), 9660..... 40 L (10.5 gal)

Engine Crankcase with Filter:

Torq-Gard Supreme™ or Plus-50™ II

9650..... 28.5 L (7.5 gal)

9660..... 29.5 L (7.7 gal)

Transmission:

GL-5

9650, 9660..... 9 L (2.3 gal)

Final Drives(Each):

GL-5

9650, 9660..... 8 L (2.1 gal)

Feeder House Reverser Gearcase (-700400):

9650..... 0.9 L (0.23 gal)

Feeder House Reverser Gearcase without Cooler:

GL-5

9650 (700401-), 9660..... 2.3 L (0.6 gal)

Feeder House Reverser Gearcase High Capacity with Cooler:

GL-5

9650, 9660..... 3.5 L (0.9 gal)

Primary Countershaft Drive Gearcase:

GL-5

9650, 9660..... 1.4 L (0.3 gal)

Dual Range Cylinder Drive Gear Case:

GL-5

9650, 9660..... 1.9 L (0.5 gal)

Beater Gear Case:

GL-5

9650, 9660..... 0.5 L (0.1 gal)

Loading Auger Gearcase:

GL-5

9650, 9660..... 3.8 L (1 gal)

Engine Gearcase:

Low Viscosity Hy-Gard™

9650, 9660..... 16 L (4.2 gal)

Hydraulic / Hydrostatic Reservoir:

Low Viscosity Hy-Gard™

9650, 9660..... 34 L (8.9 gal)

[Return to Filter Overview](#)