

REPLACEMENT PARTS GUIDE

640FD Cutting Platform

KNIFE SECTIONS



H153329 (Fine Tooth)

Small grains or grassy undergrowth conditions.



H163131 (Coarse Tooth)

Coarse grains / soybeans.



H215025 Short / Long (Fine Tooth)

Recommended for no-till. Can be used with standard or no-till guards.



H215064 Short / Long (Coarse Tooth)

Recommended for no-till. Can be used with standard or no-till guards.

GUARDS

4-INCH NO-TILL KNIFE



H218701 (SLS)

H218702 (LSL)

Heat treated & carburized for wear resistant outer surface.



4-INCH DUAL DRIVE BOTTOM CENTER

HXE19625 (RH)

HXE18172 (LH)

Heat treated and boronized for extra wear life.



4-INCH DUAL DRIVE TOP CENTER

AH226928

DRAPER END

H226528



STANDARD LONG POINT

H213405 (LSL)

H213508 (SLS)

Heat treated & carburized for wear resistant outer surface.



HIGH WEAR LONG POINT

H229539 (LSL)

H229540 (SLS)

Heat treated and boronized for extra wear life.



4-INCH STANDARD BLUNT-POINT KNIFE GUARDS

H213398 (LSL)

H213507 (SLS)

Heat treated & carburized for wear resistant outer surface.

REEL FINGERS

FULL BAT

AH166489 (Set of 10)

AH166493 (Set of 130)



LH BAT

AH166490 (Set of 10)



RH BAT

AH166491 (Set of 10)



NO BAT

KXE10477 (Set of 10)



WIDE REEL FINGER

H207933



Improved sweeping action in short / light crops prongs "spear" into crop to minimize shatter.

PLASTIC SKID PLATE

H205344 (- 764999)

H231690 (765000 -)



POLY SKID PLATE

HXE10959



BELT

DRAPER BELT

AXE35348 (- 784999)

(Outer, Qty = 2, LGTH = 2267 mm)

AXE35349 (- 784999)

(Inner, Qty = 2, LGTH = 3017 mm)

AXE36550 (785000 -)

(Outer, Qty = 2, LGTH = 2209 mm)

AXE36551 (785000 -)

(Inner, Qty = 2, LGTH = 2968 mm)




GUARDS

4-INCH HIGH-WEAR BLUNT-POINT KNIFE GUARDS

H229537 (LSL)

H229538 (SLS)

Heat treated and boronized for extra-long wear life.

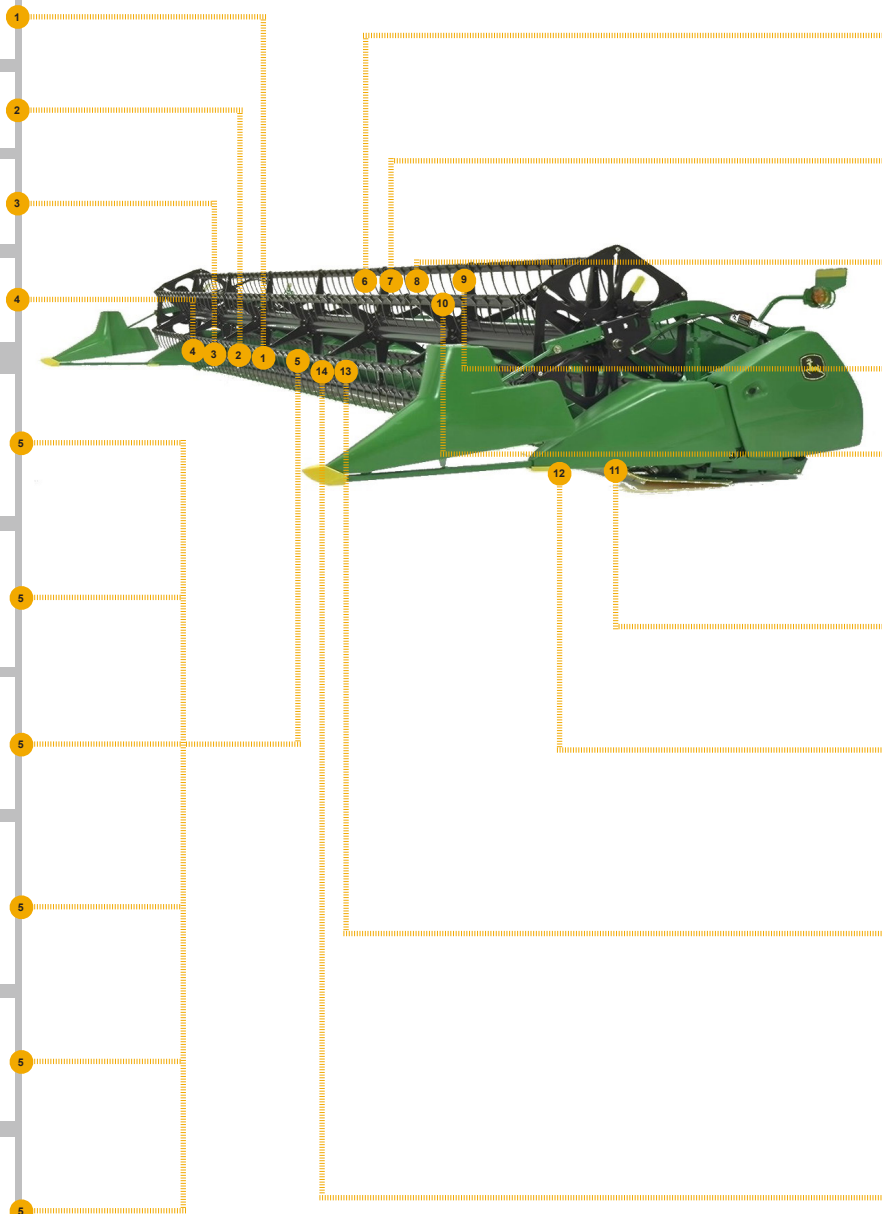

JOHN DEERE
Genuine Parts and Service