

# REPLACEMENT PARTS GUIDE

## 645FD Cutting Platform

### KNIFE SECTIONS



#### H153329 (Fine Tooth)

Small grains or grassy undergrowth conditions.



#### H163131 (Coarse Tooth)

Coarse grains / soybeans.



#### H215025 Short / Long (Fine Tooth)

Recommended for no-till. Can be used with standard or no-till guards.



#### H215064 Short / Long (Coarse Tooth)

Recommended for no-till. Can be used with standard or no-till guards.

### GUARDS

#### 4-INCH NO-TILL KNIFE



#### H218701 (SLS) H218702 (LSL)

Heat treated & carburized for wear resistant outer surface.



#### 4-INCH DUAL DRIVE BOTTOM CENTER

#### HXE19625 (RH) HXE18172 (LH)

Heat treated and boronized for extra wear life.



#### 4-INCH DUAL DRIVE TOP CENTER

#### AH226928

#### DRAPER END H226528 (Only RH end)



#### STANDARD LONG POINT

#### H213405 (LSL) H213508 (SLS)

Heat treated & carburized for wear resistant outer surface.



#### HIGH WEAR LONG POINT

#### H229539 (LSL) H229540 (SLS)


Heat treated and boronized for extra wear life.



#### 4-INCH STANDARD BLUNT-POINT KNIFE GUARDS

#### H213398 (LSL) H213507 (SLS)

Heat treated & carburized for wear resistant outer surface.

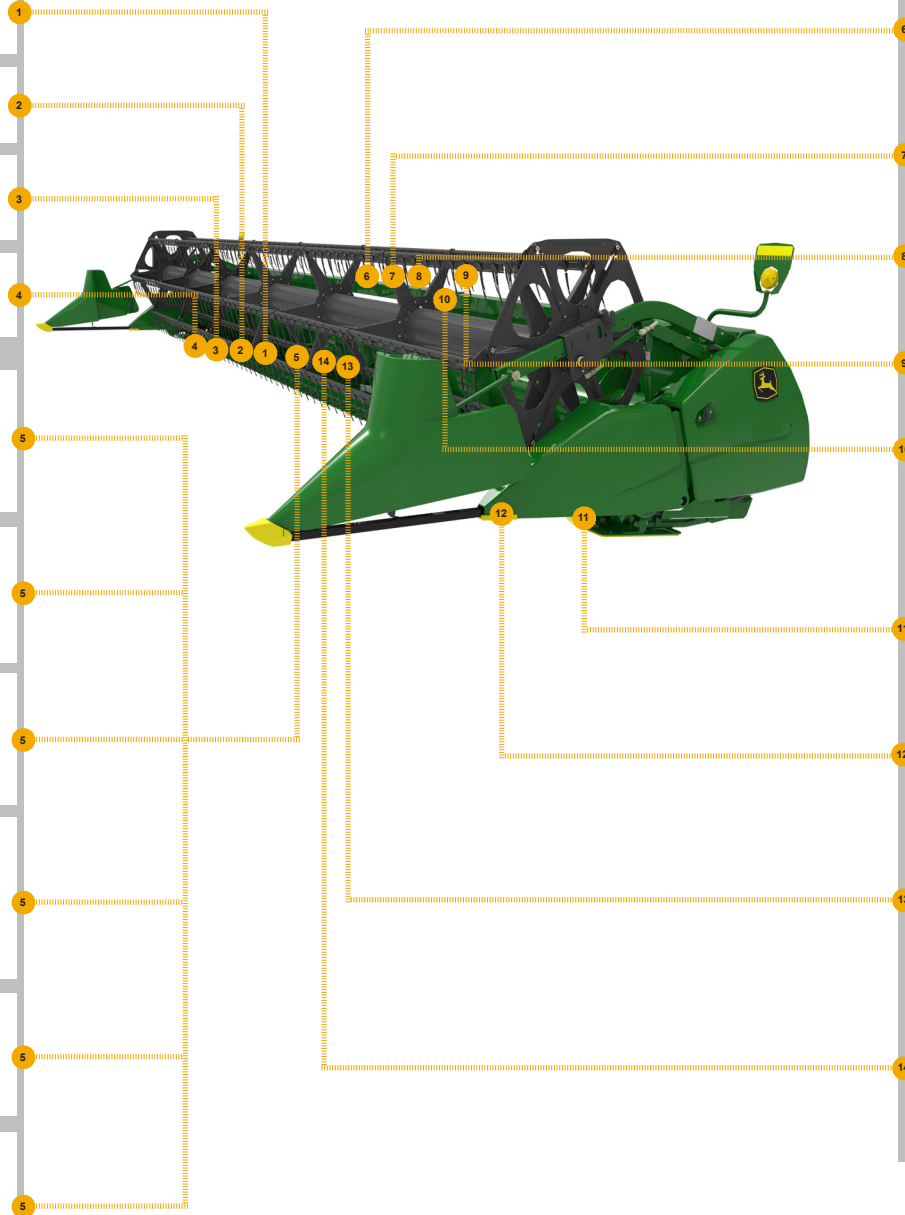

### REEL FINGERS



#### FULL BAT

[AH166489](#) (Set of 10)

[AH166493](#) (Set of 130)



#### LH BAT

[AH166490](#) (Set of 10)



#### RH BAT

[AH166491](#) (Set of 10)



#### NO BAT

[KXE10477](#) (Set of 10)



#### WIDE REEL FINGER

[H207933](#)

Improved sweeping action in short / light crops when prongs "spear" into crop to minimize shatter.

### PLASTIC SKID PLATE



[H205344](#) (- 764999)  
[H231690](#) (765000 -)

### POLY SKID PLATE



[HXE10959](#)

### BELT



#### DRAPER BELT

[AXE36551](#) (Qty = 4, LGTH = 2968 mm)

### GUARDS



#### 4-INCH HIGH-WEAR BLUNT-POINT KNIFE GUARDS

[H229537](#) (LSL)  
[H229538](#) (SLS)

Heat treated and boronized for extra-long wear life.