

REPLACEMENT PARTS GUIDE

9030 Series Track Tractors - 9430T, 9530T, 9630T

FILTER OVERVIEW WITH SERVICE INTERVALS

ENGINE

PRIMARY AIR FILTER

[RE261960](#)

Replace annually or as indicated. (Interval may vary according to operating conditions.)

SECONDARY AIR FILTER

[RE230985](#)

Replace annually or every second replacement of primary filter.

OIL FILTER

[RE572785](#)

Initial oil and filter change at 100 hours and then after every 250 hours. Scheduled interval of 250 hours can be extended to 375 hours if John Deere Plus-50 oil and John Deere filter is used.

PRIMARY FUEL FILTER

[RE532952](#)

SECONDARY FUEL FILTER

[DZ112918](#)

Replace after 100 hours, then after every 250 hours or as required, whichever occurs first. (Interval may vary according to operating conditions.)

MOTOR SEAL DRAIN FILTER

[AL221066](#)

Change annually or as required.

STEERING FILTER

[RE69054](#)

Replace after 1500 hours. (Interval may vary according to operating conditions.)

HYDRAULICS

RESERVOIR OIL FILTER

[AT101565](#)

Replace after every 750 hours. (Interval may vary according to operating conditions.)

CAB

RECIRCULATION AIR FILTER

[RE187966](#)

Clean after every 250 hours or as required. Replace annually and as required. (Interval may vary according to operating conditions.)

ACTIVATED CARBON RECIRCULATION FILTER

[RE199682](#)

Do NOT clean. Replace annually or as required. (Interval may vary according to operating conditions.)

AIR FILTER, STANDARD

[RE24619](#)

Clean after every 250 hours and replace annually. (Interval may vary according to operating conditions.)

CONCRETE AIR FILTER

[RE199681](#)

Do NOT Clean. Change annually, after 500 hours, or as required.

FUEL TANK VENT FILTER

[RE52504](#)

Replace every 1000 hours. (Interval may vary according to operating conditions.)

TRANSMISSION

FILTER

[RE174130](#)


Replace after 100 hours, then after every 750 hours or as required, whichever occurs first.

HYDRAULICS

HYDRAULIC OIL FILTER

[RE174130](#)

Replace after 1500 hours, as required or as indicated. (Interval may vary according to operating conditions.)

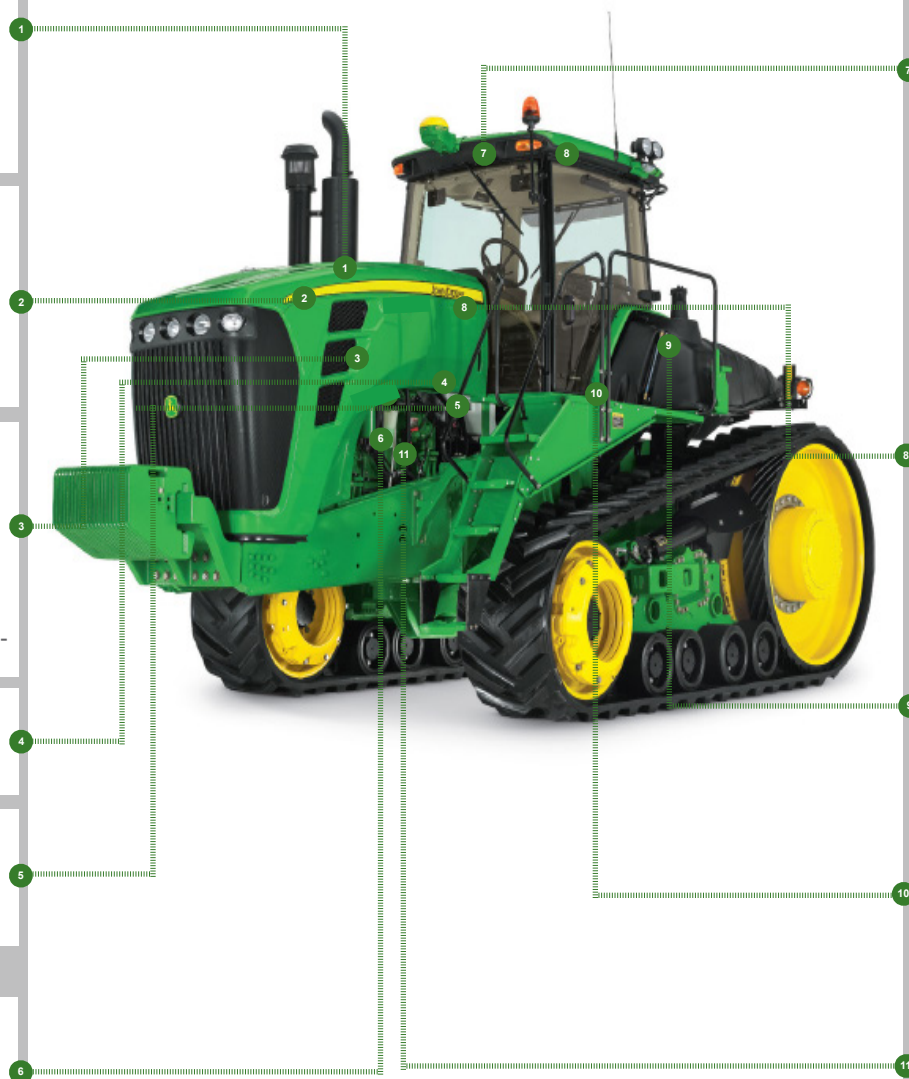

For Company use: RX532520

Apr 2022. Release Date.

CAPACITIES

9030 Series Track Tractors - 9430T, 9530T, 9630T

CAPACITIES (Approximate):

Fuel Tank:

..... 1249 L (330 gal)

**Cooling System:
Cool-Gard™ II**

..... 53 L (14 gal)

**Crankcase:
Plus-50™**

9430T..... 40 L (10.5 gal)
9530T-9630T..... 56 L (14.8 gal)

Transmission / Axle-PST:

Hy-Gard™

Axles Only 178 L (47 gal)
Transmission with Axle 227 L (60 gal)
With PTO 230 L (61 gal)

Hydraulic System:

Hy-Gard™

Without Hitch 102 L (27 gal)
With Hitch 104 L (27.5 gal)



REPAIR PARTS

9030 Series Track Tractors - 9430T, 9530T, 9630T

ENGINE

 **STARTER**
[RE539584](#)


 **AUXILLARY DRIVE BELT**
[R241746](#)

 **FAN DRIVE BELT**
[R239551](#)

 **RADITOR CAP**
[AT322214](#)

 **BELT TENSIONER**
[RE243154](#)

 **WATER PUMP**
[RE549117](#)

 **ENGINE BLOCK HEATER**
[AR84185](#)

 **A/C COMPRESSOR**
[AH169875](#)

 **ALTERNATOR**
[RE555751](#)

 **FUEL INJECTION PUMP**
[DZ124926](#) - 3712
[DZ124927](#) - 3703


 **TORSIONAL DAMPER**
[RE530733](#)

 **BATTERY**
[TY25879B](#)



CAB

 **INTERNAL REAR VIEW**
[AT186760](#)

 **EXTERNAL REAR VIEW**
[AL78021](#) - Outer Rear View
[R134059](#) - Remote Power






 **WIPER BLADE**
[AL153661](#) - Front And Rear



 **TECHNOLOGY MOUNTING SOLUTION**
[BRE10141](#) - Mounting Bracket
[BRE10015](#) - Cell Phone Mount
[BRE10255](#) - Tablet Mount

 **GAS CYLINDERS**
[RE234165](#) - LH Door
[RE234166](#) - Rear Window

HITCH AND SCV

HITCH MAINTENANCE
 [R253500](#) - Sway Block RH
 [R253501](#) - Sway Block LH
 [RE334228](#) - Rockshaft Position Sensor

SCV
 [RE577560](#) - Breakaway Coupler
 [R186598](#) - Snap Ring
 [RE186600](#) - Seal Kit
 [RE220072](#) - Power Beyond Coupler Kit
 [RE151894](#) - Hydraulic Motor Return Kit

LIFT LINK PINS
 [R272197](#) - Pin
 [R107278](#) - Draft Link Ball Stud

For Company use: RX532520

Apr 2022. Release Date.