

REPLACEMENT PARTS GUIDE

W650 COMBINE (MY 2014 – 2015)



CAB

FRESH AIR FILTER
RE284091
 Clean or replace every 50 hours and as required

RECIRCULATION AIR FILTER
L214634
 Clean and Replace as required

ENGINE


FUEL PRECLEANER FILTER
R502778
PREMIUM FUEL PRECLEANER FILTER
N378886
 Drain every 50 hours or weekly

DIESEL EXHAUST FLUID LINE
DZ100304
 Change every 4500 hours or Diagnostic Trouble Code (DTC) generated

FINAL TIER 4 PRIMARY FUEL FILTER
RE20906
SECONDARY FUEL FILTER
RE525523
 Change as require or when Diagnostic Trouble Code (DTC) is generated

HYDRAULIC OIL FILTER VENTILATION SYSTEM
AL203061
 Change after every 400 hours or ever year

MAIN ENGINE GEARCASE FILTER (PRODRIVE™ TRANSMISSION)
AH128449
 Change after first 100 hours.

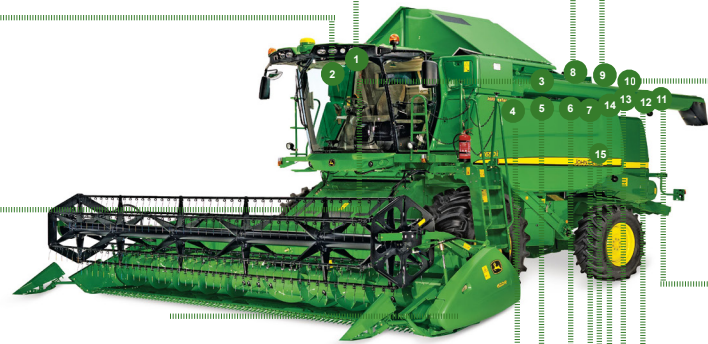

ENGINE

ENGINE FUEL FILTER (STANDARD)
RE529643
 Change as require or when Diagnostic Trouble Code (DTC) is generated.

OIL FILTER
RE509672
 Change after every 250 hours or every year.

MAIN ENGINE GEARCASE FILTER
CE19990
 Change after every 400 hours or every year

DIESEL PARTICULATE FILTER
DZ100484
 Change every 4500 hours or Diagnostic Trouble Code (DTC) generated

LONG FILTER PRIMARY AIR FILTER
AH164062
SECONDARY AIR FILTER
AH164063
 Change as require or when Diagnostic Trouble Code (DTC) is generated.

SHORT FILTER PRIMARY AIR FILTER
AH148880
SECONDARY AIR FILTER
RE525523
 Change as require or when Diagnostic Trouble Code (DTC) is generated..

FUEL FILTER (TIER 2)
RE522878
 Check Every 4500 hours or Diagnostic Trouble Code (DTC) isgenerated..

OIL FILTER (TIER 2)
RE504836
 Change after first 100 hours.

For Company Use - ZX543866

Sep.2022. Release Date.



CLICK PART NUMBER TO BUY
 *See operator's manual for additional details.

CAPACITIES

W650 Combine (MY 2014 – 2015)

CAPACITIES (Approximate):

Fuel Tank:	800 L (210 gal)
Grain Tank	9000 L (2378 gal)
Cooling System with Heater: (Cool-Gard II)-Tier 2	40 L (10.56 gal)
Cooling System with Heater: (Cool-Gard II)-Tier 4	45 L (11.88 gal)
Engine Crankcase with Filter (Plus-50™ II)-Tier 2	32 L (8.45 gal)
Engine Crankcase with Filter (Plus-50™ II)-Tier 4	29 L (7.6 gal)
Transmission (3-Speed Mechanical Shift and Push Button Shift) – (GL-5)	7 L (1.85 gal)
Final Drive (GL-5)	7 L (1.85 gal)

[RETURN TO FILTER OVERVIEW ENGINE GEARCASE WITH TRANSFER](#)

Engine Gearcase with Transfer (3-Speed Mechanical Shift and Push Button Shift Machines) – (Hy-Gard™)	16 L (4.22 gal)
Engine Gearcase with Transfer (ProDrive™ Machines) –(Hy-Gard™)	20 L (5.25 gal)
Hydraulic System Reservoir (Hy-Gard™)	34 L (9.51 gal)
Feeder house reverser gear case (ISO VG 460 Fully Synthetic)	2 L (0.5 gal)
Countershaft drive gear case (GL-5)	1.2 L (0.32 gal)
Loading Auger Gearcase (GL-5)	3.8 L (1 gal)

[RETURN TO FILTER OVERVIEW ENGINE GEARCASE WITH TRANSFER](#)

REPLACEMENT PARTS GUIDE

W650 COMBINE

THRESHING

MY11-22

[AZ58905](#) - RASP BARS

Paired by weight with deep heat treatment for excellent threshing, good drum balancing and long lifetime.

MY11-22

[AXE53048](#) - UNIVERSAL CONCAVE

MY16-18

[AXE68166](#) - HIGH DIVERSITY
UNIVERSAL CONCAVE

[AXE53100](#) - SMALL GRAIN CONCAVE

MY16-18

[AXE68169](#) - HIGH DIVERSITY SMALL
GRAIN CONCAVE

Exactly welded for easy adjustment and perfect threshing.

MY19-22

[AXE59411](#) - HIGH-VERSATILITY CONCAVE

[AXE59379](#) - CONCAVE INSERT SMALL
GRAIN

[AXE59409](#) - CONCAVE INSERT SMALL
GRAIN

[BXE10909](#) - ROUND BAR CONCAVE
INSERT KIT

High versatility with easy-to-exchange inserts.



STRAW CHOPPER

PREMIUM KNIVES

Induction hardened to resist wear and tear at the punched hole and the cutting edge.

MY11-15

[Z103205](#) - PREMIUM CHOPPER SERRATED
KNIFE

[Z103376](#) - PREMIUM CHOPPER SMOOTH
KNIFE

MY11-22

[Z105500](#) - PREMIUM CORN SERRATED
KNIFE

MY11-15

[Z75874](#) - PREMIUM CHOPPER
STATIONARY KNIFE

STANDARD KNIVES

Induction hardened to resist wear and tear at the punched hole and the cutting edge.

MY11-15

[Z77601](#) - STANDARD CHOPPER
SERRATED KNIFE

MY11-22

[Z53454](#) - STANDARD CHOPPER SMOOTH
KNIFE

MY11-15

[Z42176](#) - STANDARD CHOPPER CORN
KNIFE

[HXE13024](#) - STANDARD CHOPPER
STATIONARY KNIFE SMOOTH

MY16-22

[HXE13023](#) - STANDARD CHOPPER
STATIONARY KNIFE SERRATED

REPLACEMENT PARTS GUIDE

W650 COMBINE

FEEDERHOUSE

OUTER CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



MY11-15

[AZ63336](#)



[AZ102573](#) (HEAVY DUTY)



MY16-22

[AXE41939](#)

INNER CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



MY11-15

[AZ63337](#)



[AZ102574](#) (HEAVY DUTY)



MY16-22

[AXE41940](#)



GRAIN HANDLING

MY11-22

[AZ101808](#) - CLEAN GRAIN ELEVATOR CHAIN

Made for smooth running, resisting load spikes and minimal elongation.



STRAW WALKER

MY11-15

[AZ45586](#) - BEARING

Original John Deere bearings don't warp, open, crack or break, nor will they seize on the shaft.

