

# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 3000 Series Compact Utility Tractors – 3005, 3203



### TRANSMISSION OIL FILTER

(3005) - [RE27284](#)

(3203) - [LVA13065](#)

Replace after every 400 hours  
and as required per conditions.

(Click here for [capacity](#))

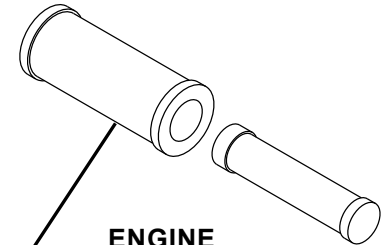

### ENGINE AIR FILTER


(3005) PRIMARY - [M131802](#)

(3005) SECONDARY - [M131803](#)

(3203) PRIMARY - [RE68048](#)

(3203) SECONDARY - [RE68049](#)

Replace annually, and as required  
per conditions.




### ENGINE

OIL FILTER - [M806419](#)

Replace after every 200 hours and as required  
per conditions.

(Click here for [capacity](#))



### ENGINE

FUEL FILTER - [MIU800645](#)

Replace after every 400 hours  
and replace annually.



### ENGINE

SEPARATOR FILTER - [M811032](#)

Replace annually.



**JOHN DEERE**  
Genuine Parts and Service

# CAPACITIES

## 3000 Series Compact Utility Tractors – 3005, 3203

### CAPACITIES (Approximate):

#### Fuel Tank:

3005.....	24 L (6.3 gal)
3203.....	43.5 L (11.5 gal)

#### Cooling System:

##### Cool-Gard™

3005.....	4.8 L (1.26 gal)
3203.....	5.3 L (1.4 gal)

#### Crankcase with Filter:

##### Plus-50™

3005.....	2.8 L (0.73 gal)
3203.....	4.3 L (1.13 gal)

#### Transmission and Hydraulic System:

##### Hy-Gard™

3005.....	15.0 L (4 gal)
3203.....	25.7 L (6.8 gal)

#### Front Axle:

##### Hy-Gard™

3005.....	3 L (0.79 gal)
3203.....	4.5 L (1.18 gal)

[Return to Filter Overview](#)