


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## CP690 Cotton Picker

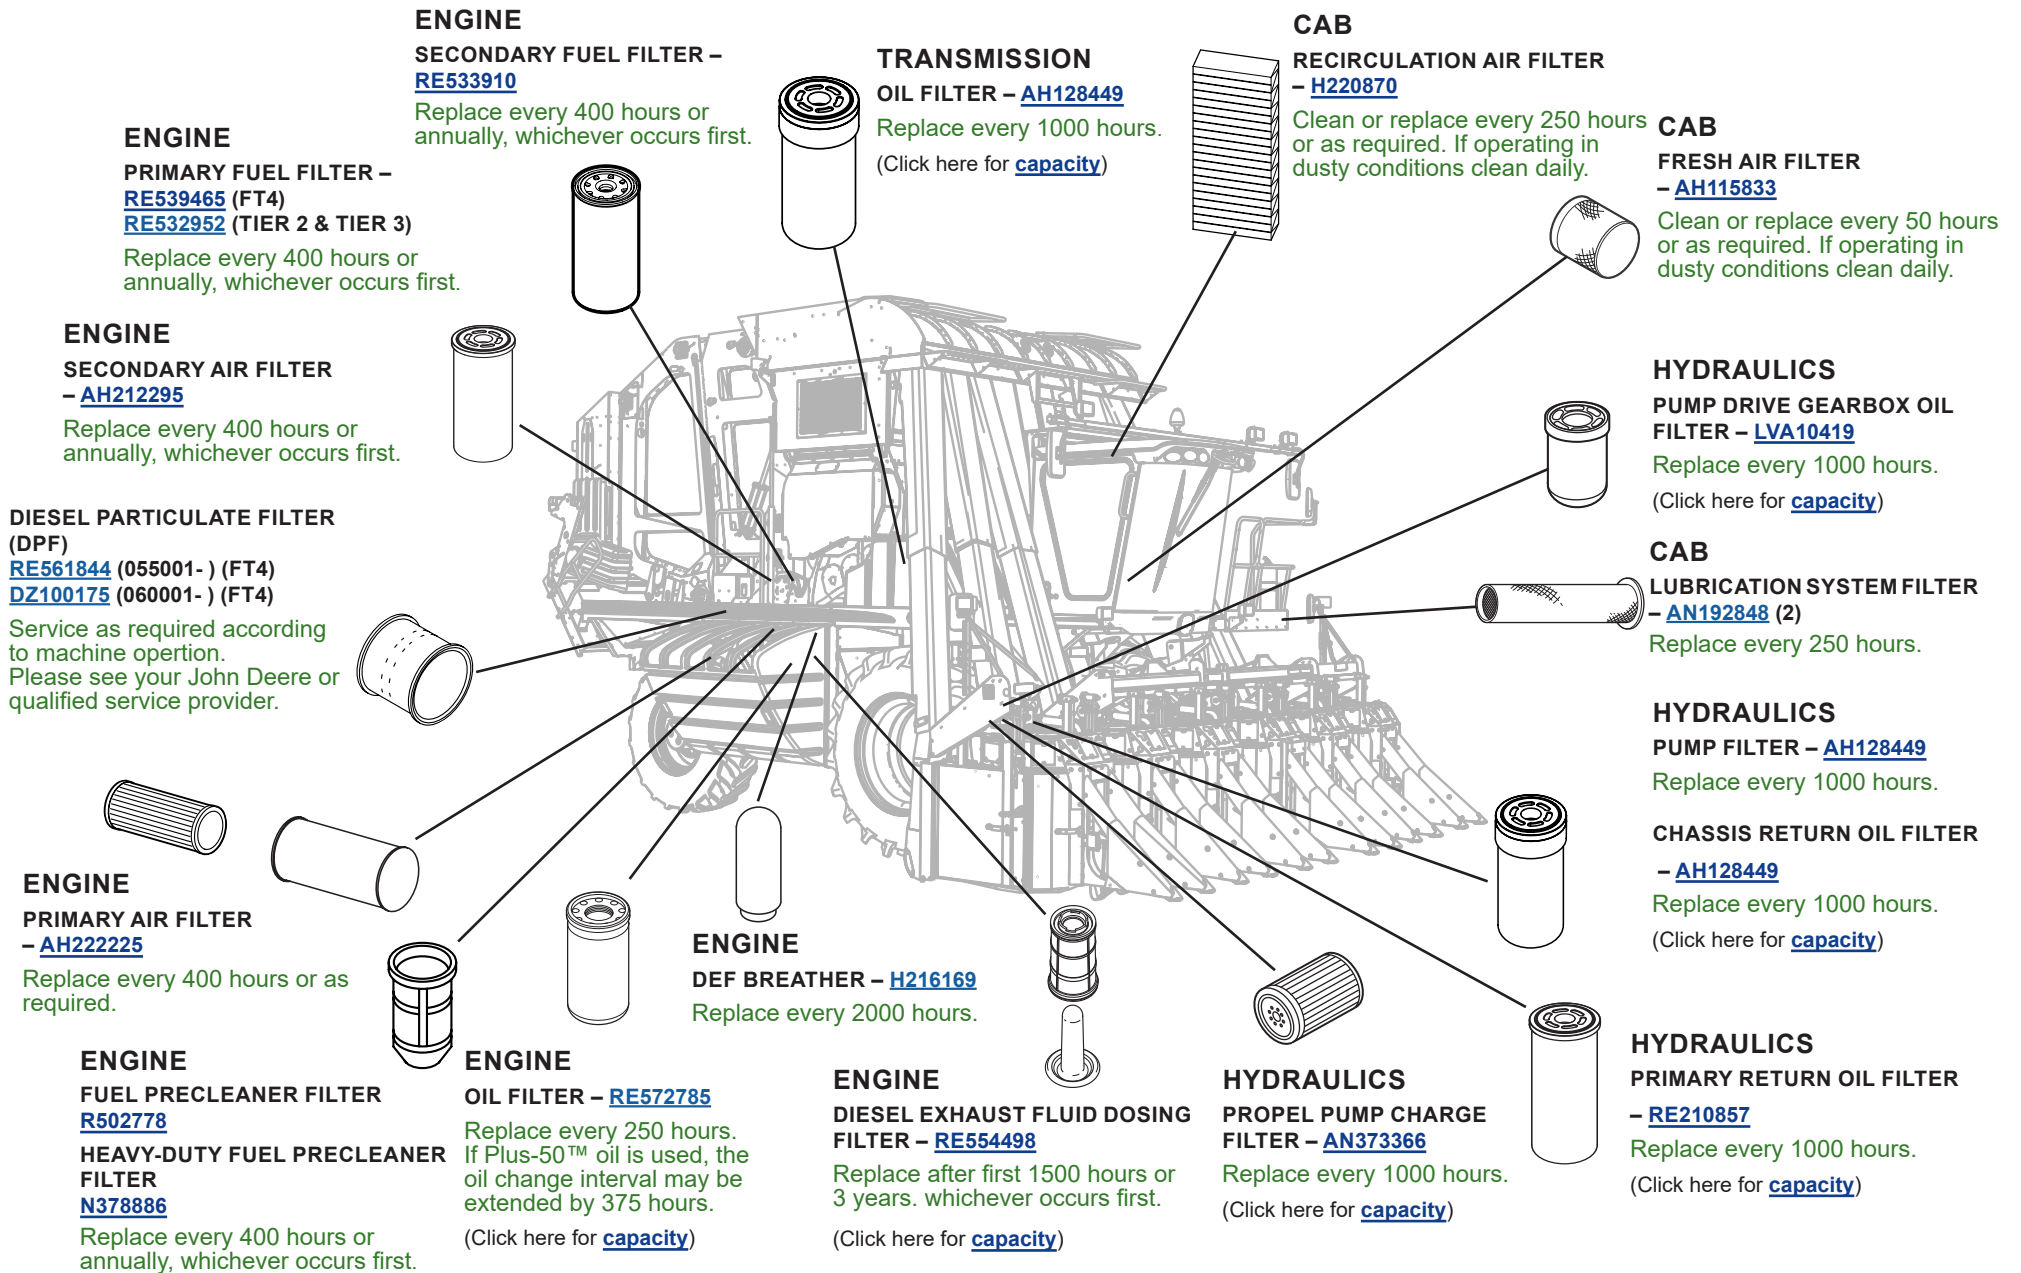

# CAPACITIES

## CP690 Cotton Picker

### CAPACITIES (Approximate):

#### Fuel Tank:

..... 1400 L (370 gal)

#### Diesel Exhaust Fuel Tank (Tier 4/Stage IV only):

##### John Deere Diesel Exhaust Fluid™

..... 60.5 L (16 gal)

#### Moisture Solution Tank:

##### John Deere Spinole Cleaner™

..... 1363 L (360 gal)

#### Pump Drive Gearbox:

##### Hy-Gard™

..... 15.1 L (4 gal)

#### Cooling System:

##### Cool-Gard™ II

Tier 2 / Stage II ..... 53 L (14 gal)

Tier 3 / Stage III ..... 59 L (15.6 gal)

Tier 4 / Stage IV ..... 70 L (18.5 gal)

#### Engine Crankcase (Includes Filter):

##### Plus-50™ II

Tier 2/Stage II and Tier 3/Stage III ..... 39 L (10.3 gal)

Tier 4/Stage IV ..... 43 L (11.4 gal)

#### Hydraulic Oil Reservoir:

##### Hy-Gard™

..... 189 L (50 gal)

#### Hydraulic/Hydrostatic System:

##### Hy-Gard™

..... 276 L (73 gal)

#### Transmission/Brake System:

##### Hy-Gard™

..... 19 L (5 gal)

#### Final Drive: (2 used)

##### GL-5

..... 7.8 L (2 gal)

#### Lubrication System Grease Tank:

##### John Deere Spinole Lubricant™

..... 257 L (68 gal)

#### Row Unit Gearcase: (6 used)

##### Hy-Gard™

..... 0.66 L (0.17 gal)

#### Hydraulic Unit Drive Reduction Gearbox (2 Used):

##### Hy-Gard™

..... 0.59 L (0.15 gal)

#### Rear Axle Main Body Housing:

##### GL-5

..... 9.9 L (2.6 gal)

#### Rear Axle Auxiliary Gearbox:

##### GL-5

..... 1.3 L (0.34 gal)

#### Rear Axle Planetary (2 Used):

##### GL-5

..... 3.8 L (1 gal)

[Return to Filter Overview](#)

