


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

F4365 Nutrient Applicator (FT4)

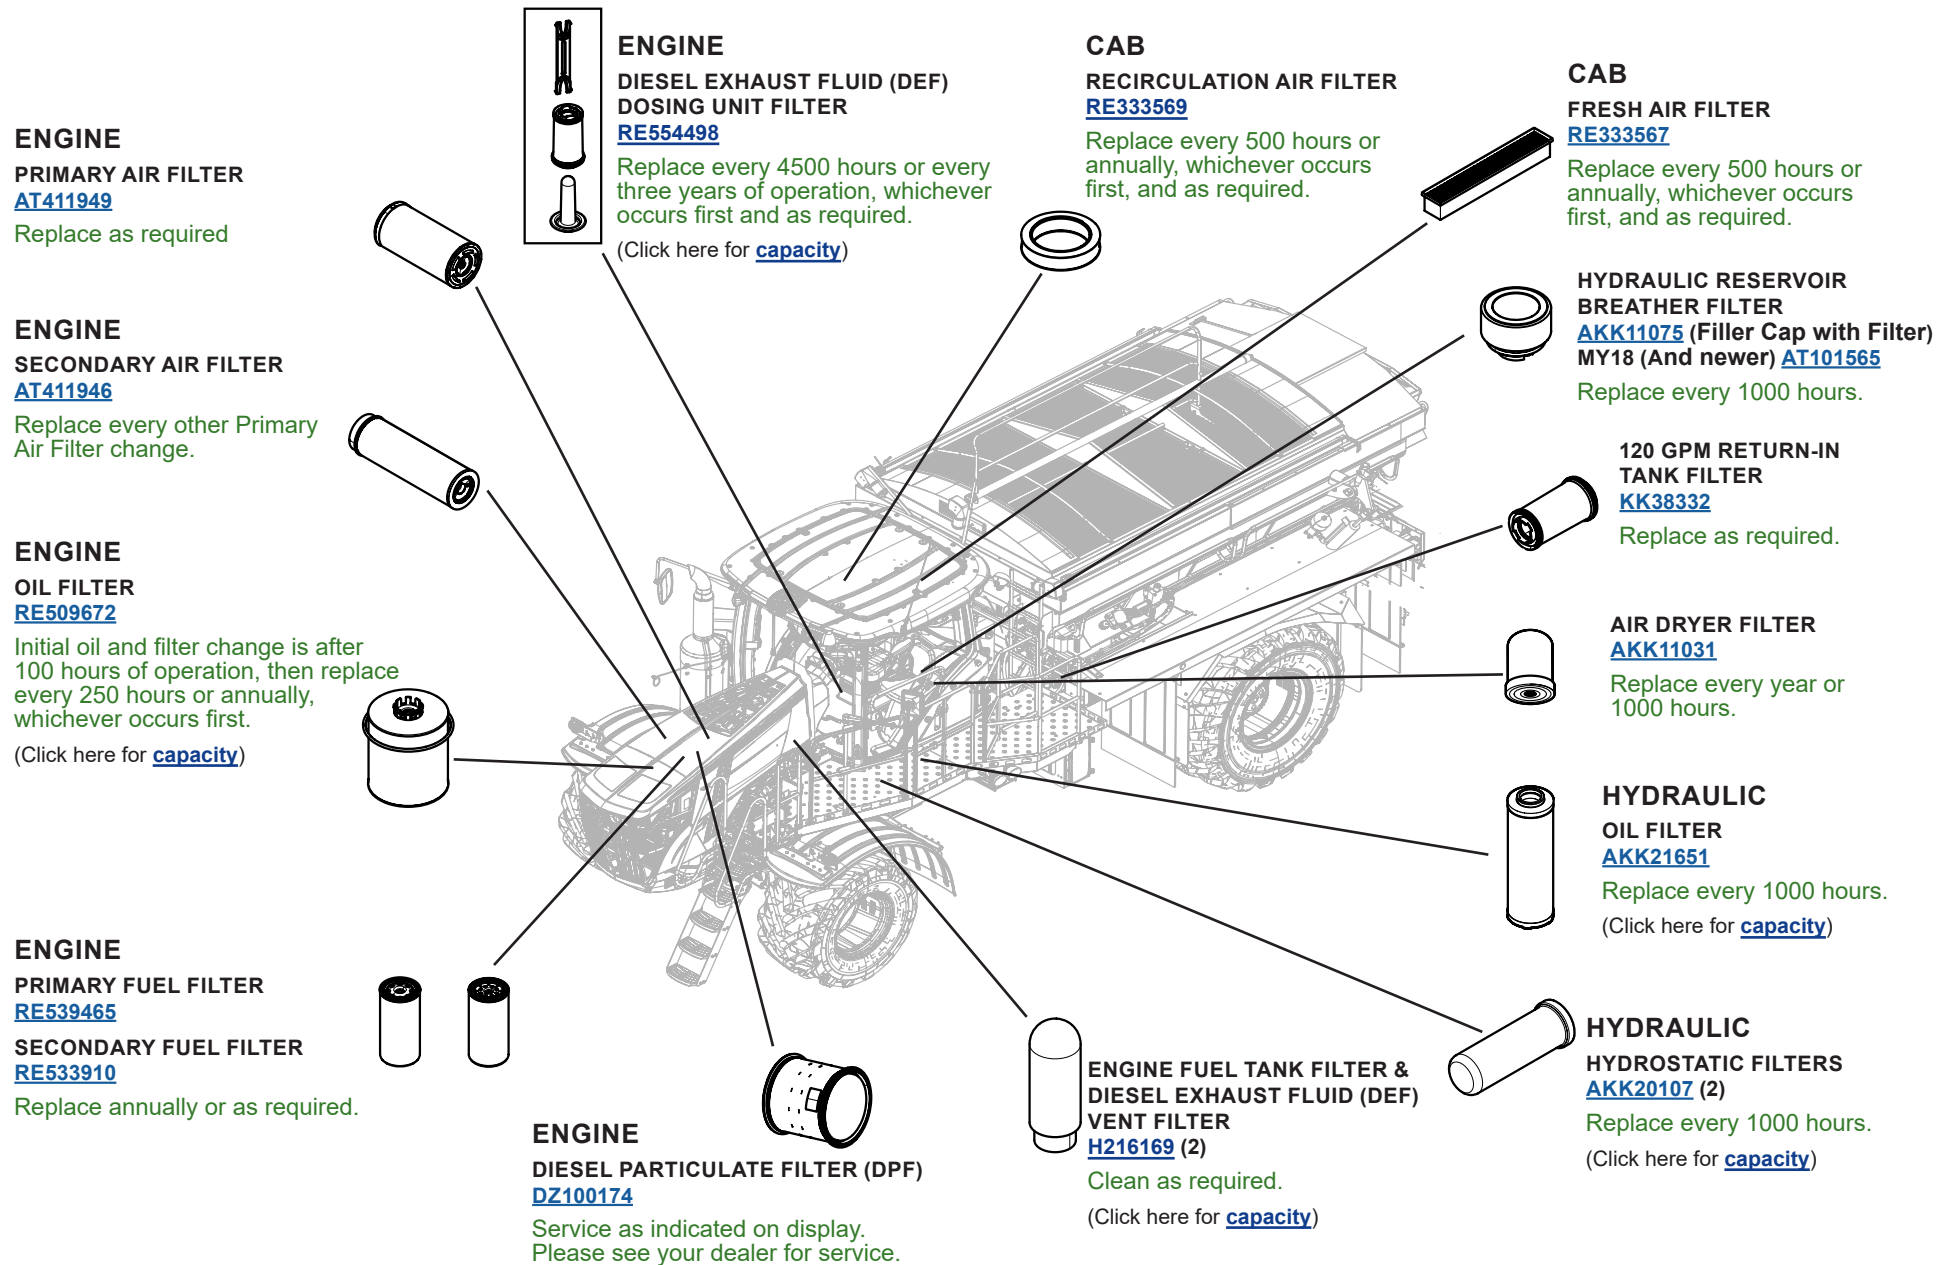

CAPACITIES

F4365 Nutrient Applicator (FT4)

CAPACITIES (Approximate):

Fuel Tank:

..... 549 L (145 gal)

Diesel Exhaust Fluid (DEF) Tank: John Deere™ Diesel Exhaust Fluid

..... 29.5 L (7.8 gal)

Engine Oil:

John Deere™ Plus-50™ II John Deere Break-In Plus™

..... 29.5 L (7.8 gal)

Cooling System with Heater: Cool-Gard™ II

..... 38 L (10 gal)

Hydraulic Reservoir: John Deere™ Hy-Gard™

Transmission 76 L (20 gal)

Steering 27 L (7 gal)

Dry Spinner Spreader 87 L (23 gal)

Pump Drive Gear Case

John Deere™ Hy-Gard™

John Deere™ Low Viscosity Hy-Gard™

..... 2.5 L (2.6 qt)

Planetary Final Drives (Each):

GL-5 85W-140 Gear Lube

Rear Hub Capacity 3.8 L (4 qt)

Rear Differential Capacity 18.9 L (20 qt)

Front Axle Wheel Bearing Capacity 0.5 L (0.5 qt)

Belt Over Chain Conveyor:

..... 75% diesel fuel and 25% SAE 10 oil mixture.

Grease:

John Deere SD Polurea Grease Only

..... As Required

Fluid Film:

..... End of Season, and as Required

[Return to Filter Overview](#)

