

# REPLACEMENT PARTS GUIDE

## 8000A E-Cut Hybrid Fairway Mower

### ENGINE



#### ENGINE OIL FILTER

[M806419](#)

Change Every 250 Hrs.

#### ENGINE OIL



[TY26674](#) (PLUS-50™ II 10W-30)  
(WITH FILTER) (5.7 L (6 qt))  
(WITHOUT FILTER) (5.2 L (5.5 qt))

Change Every 250 Hrs.



#### AIR FILTER ELEMENT

[RE68048](#) (PRIMARY)

Replace Every 300 hrs.

[RE68049](#) (SECONDARY)

Replace Every 500 hrs.



#### FUEL FILTER

[MIU803127](#) (TIER4)

[MIU800645](#) (NON TIER4)

Change Every 500 Hrs.



#### FUEL SEPARATOR ELEMENT

[M811032](#) (NON TIER 4)

[MIA885326](#) (TIER 4)



#### BELT -FAN

[TCU30780](#) (LGTH = 1425 mm,TK = 12 mm,  
WIDTH = 11 mm) (TIER 4)

[TCU38089](#) (LGTH = 1475 mm, TK = 12 mm,  
WIDTH = 11 mm) (NON TIER 4)



#### JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)

Change As Required.



#### GREASE GUN

[TY26518](#)

Change As Required.



### FUEL AND AIR



#### FILLER CAP

[LVA18519](#)



#### MUFFLER

[MIU803736](#)

### ELECTRICAL



#### KEY

[AUC12681](#)



#### IGNITION SWITCH

[TCA22740](#) (S/N ( - 040000))

[AUC18708](#) (S/N (040001- ))



#### BATTERY

[TY25876B](#) (12V) (FOR CANADA AND USA)

[MCYP25876](#) (12V) (NOT FOR CANADA  
AND USA)

# REPLACEMENT PARTS GUIDE

## 8000A E-Cut Reel Cutting Unit

### REEL CUTTING UNITS

#### REEL

[TCA19348](#) (7 BLADE)

[TCA19349](#) (11 BLADE)

[TCA23622](#) (14 BLADE)

#### STATIONARY KNIFE


[UC18877](#) (HEIGHT OF CUT = 2.5 mm)  
(TOURNAMENT)

[UC28157](#) (HEIGHT OF CUT = 4.8 mm)  
(FAIRWAY)

[UC23445](#) (HEIGHT OF CUT = 7.6 mm)  
(FAIRWAY HIGH)

[UC28164](#) (HEIGHT OF CUT = 2 mm)  
(LOW CUT)

[TCU36878](#) (STATIONARY HEIGHT  
OF CUT = 2 mm)

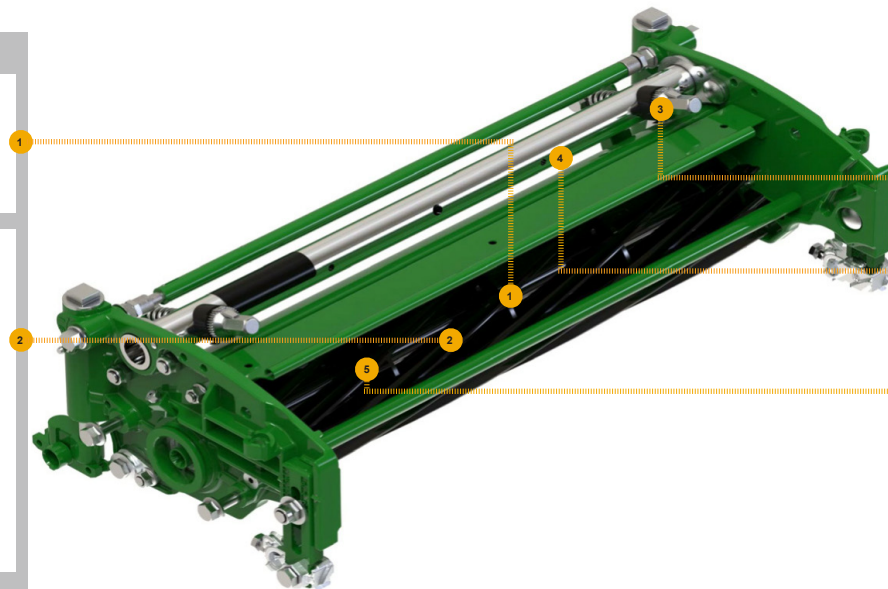

### VERTICAL CUTTING UNIT

#### ADJUSTER

[AUC13598](#) (REAR)

#### SHAFT

[AUC14974](#)

#### BRACKET

[UC18211](#) (RH, IF USING FTC / GTC)  
(LH, IF NO FTC / GTC)

[UC16109](#) (LH, IF USING FTC / GTC)  
(RH, IF NO FTC / GTC)

# REPLACEMENT PARTS GUIDE

## 8000A E-Cut Reel Cutting Unit

### ENGINE

#### ROLLER

- [BM22879](#) (SPIRAL GROOVED) (2 INCH)
- [BM22868](#) (GROOVED FRONT) (2 INCH)
- [BM24203](#) (HOLLOW SMOOTH) (2 INCH)
- [AMT2981](#) (SMOOTH FRONT) (2 INCH)
- [AMT2979](#) (GROOVED FRONT ROLLER) (KIT W/FLATS) (18 INCH)
- [BM23567](#) (MACHINED SPIRAL) (2 INCH)
- [BTC10281](#) (RELIEVED SHORT GROOVED) (2 INCH)
- [TCA19509](#) (SMOOTH ROLLER) (3 INCH)
- [BM25316](#) (GROOVED DISK HEAVY DUTY) (3 INCH)
- [BM24204](#) (HOLLOW SMOOTH ROLLER) (2 INCH)
- [TCA22836](#) (SMOOTH ROLLER) (18 INCH)
- [BM20561](#) (MACHINED SMOOTH ROLLER) (18 INCH)

#### SCAPER

- [TCA19585](#) (GROOVED ROLLER SCRAPER) (2 INCH)
- [BM23014](#) (GROOVED ROLLER SCRAPER) (3 INCH)
- [BM23015](#) (SMOOTH ROLLER SCRAPER) (18 INCH)

#### SYNCHRONOUS BELT

- [TCU32422](#) (LGTH = 375 mm, WIDTH = 11 mm)

#### GRASS CATCHER

- [TCA21300](#) (LOW PROFILE)
- [TCA21301](#) (HIGH PROFILE)

#### BRUSH

- [BTC10833](#) (REAR ROLLER) (18 INCH)

#### KNIFE

- [MT2624](#) (FAIRWAY TENDER CONDITIONER)
- [ET14707](#) (GREENS TENDER CONDITIONER)

