

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

2000 Series Compact Utility Tractors – 2210, 2305, 2320, 2520, 2720

TRANSMISSION/HYDRAULIC OIL FILTER

(2210, 2305) – [LVA12812](#)
(2520, 2720) – [LVU800097](#)

TRANSMISSION FILTER
(2320) – [AL221066](#)

HYDRAULIC FILTER
(2320) – [LVA802810](#)

Replace initially after 50 hours,
then every 200 hours.

(Click here for [capacity](#))

ENGINE OIL FILTER

(2210, 2305, 2320) – [M806418](#)
(2520, 2720) – [M806419](#)

Replace after every 200 hours or
annually, whichever occurs first.

(Click here for [capacity](#))

FILTER PAK

(2210) – [LVA21196](#)
M806418, CH15553, LVA12812, M113621

(2305) – [LVA21200](#)
M806418, M131802, LVA12812

(2320) – [LVA21204](#)
M806418, M801101, M131802, LVA802810, AL221066

(2520, 2720) – [LVA21201](#)
M806419, M131802, LVU800097, MIU800645

Each kit contains above filter, offering a complete solution for
your maintenance needs to keep your tractor running at peak
performance.

ENGINE AIR FILTER


(2210) PRIMARY – [M113621](#)

(2210) SECONDARY – [M123378](#)

(2305, 2320, 2520, 2720) PRIMARY – [M131802](#)

(2305, 2320, 2520, 2720) SECONDARY – [M131803](#)

Replace annually, and as required per
conditions.

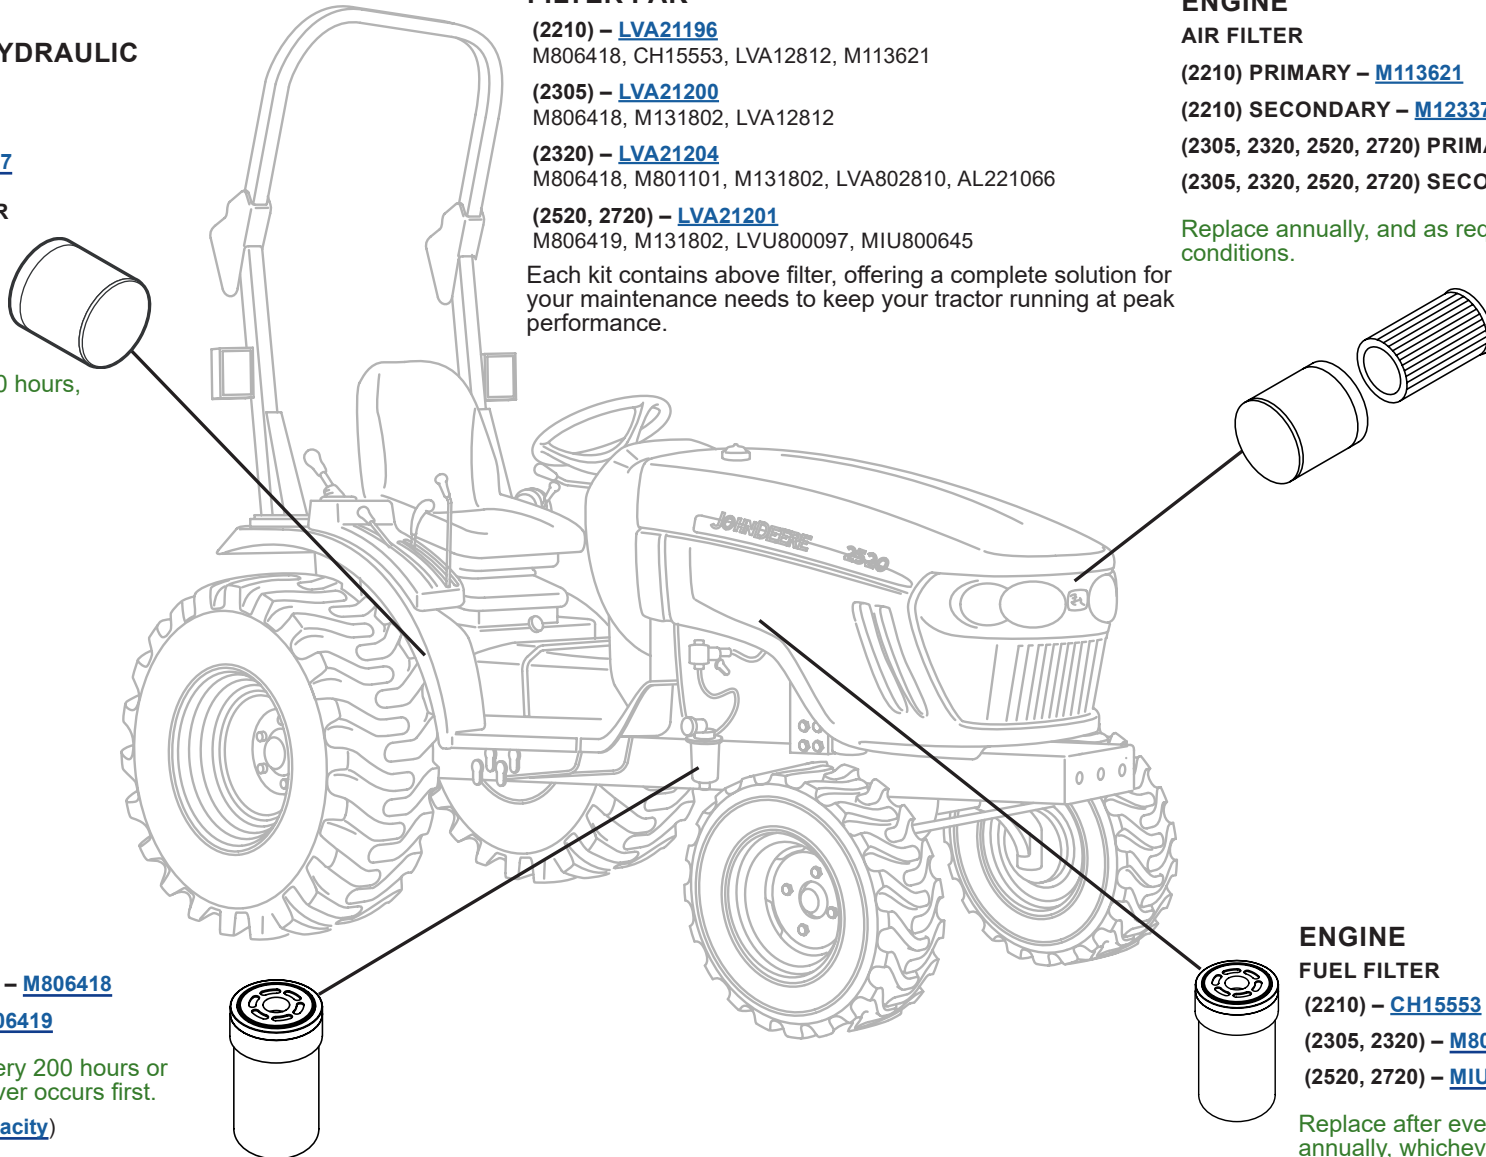

ENGINE FUEL FILTER

(2210) – [CH15553](#)
(2305, 2320) – [M801101](#)
(2520, 2720) – [MIU800645](#)

Replace after every 400 hours or
annually, whichever occurs first.



CAPACITIES

2000 Series Compact Utility Tractors – 2210, 2305, 2320, 2520, 2720

CAPACITIES (Approximate):

Fuel Tank:

2210.....	19 L (5 gal)
2305.....	21 L (5.5 gal)
2320.....	23 L (6.1 gal)
2520, 2720.....	27 L (7.1 gal)

Cooling System:

Cool-Gard™ II

2210.....	3 L (0.80 gal)
2305, 2320.....	3.2 L (0.84 gal)
2520.....	3.9 L (1.03 gal)
2720.....	4 L (1.05 gal)

Crankcase with Filter:

Plus-50™

2210.....	2.1 L (0.55 gal)
2305, 2320.....	3.2 L (0.84 gal)
2520.....	2.8 L (0.73 gal)
2720.....	3.4 L (0.89 gal)

Transmission and Hydraulic System:

Hy-Gard™

2210, 2305.....	13 L (3.4 gal)
2320.....	13.1 L (3.5 gal)
2520.....	14.6 L (3.9 gal)
2720.....	17.5 L (4.6 gal)

Front Axle:

GL-5

2210, 2305.....	2.5 L (0.66 gal)
2320, 2520.....	3.4 L (0.89 gal)
2720.....	3.9 L (1.03 gal)

[Return to Filter Overview](#)

